

pc world
BEST BUYS



108M Wireless Router TL-WR642G



Share data wirelessly
and surf the internet, email,
net chatting

Adopts eXtended Range™ technology,
4-9 times the signal coverage
of traditional 11b/g products

Adopts Super G™ technology,
Up to 108Mbps wireless data rate and fully
Compatible with IEEE 802.11g/b products



Description:

The 108Mbps Wireless Router TL-WR642G is dedicated to Small Office/Home Office (SOHO) Wireless network solutions. It integrates the functions of Wireless Access Point, firewall, 4-port Switch and NAT-Router. It helps you set up a wired or wireless network, lets your computers share a high-speed DSL or Cable Internet connection, data files and other resources such as printers and hard disk storage space.

The TL-WR642G complies with the IEEE 802.11g/b standards. In addition, it adopts 108 M Super G™ WLAN transmission


technologies to support data transmission rates up to 108Mbps. It also adopts 2x to 3x eXtended Range™ WLAN transmission technology so that transmission distance is 2-3 times that of traditional 11g/b solutions, transmission range is extended to 4-9 times. It is compatible with all IEEE 802.11g and IEEE 802.11b products.

With easy-to-use Quick Setup Wizard and plenty of functions, the TL-WR642G is your best choice to create a secure wireless network easily for your home and small office.

Specifications:

Standards	IEEE 802.11g, IEEE 802.11b
Interface	4 10/100M auto-sensing RJ45 Port(Auto MDI/MDIX) 1 10/100M auto-sensing RJ45 Port(Auto MDI/MDIX)
Wireless Signal Rates With Automatic Fallback	Super G™ : 108M 11g: 54/48/36/24/18/12/9/6M(dynamic) 11b: 11/5.5/2/1M(dynamic)
Frequency Range	2.4-2.4835GHz
Wireless Transmit Power	17dBm (MAX)
Antenna	3dBi detachable Omni directional antenna
Modulation Technology	IEEE 802.11b: DQPSK, DBPSK, DSSS, and CCK IEEE 802.11g: BPSK, QPSK, 16QAM, 64QAM, OFDM
Receiver Sensitivity	108M: -68dBm@10% PER 54M: -68dBm@10% PER 11M: -85dBm@8% PER 6M: -88dBm@10% PER 1M: -90dBm@8% PER 256K: -105dBm@8% PER
Power Supply Unit	Input: localized to country of sale Output: 9VAC / 0.8A linear PSU
Operating temperature	0°C~40°C (32°F~104°F)
Storage temperature	-40°C~70°C (-40°F~158°F)
Relative humidity	10% ~ 90%, non condensation
Storage Humidity	5%~95% non-condensing
Dimensions	6.9 in. x 4.4 in. x 1.2 in. 174 mm x 111 mm x 30 mm

Diagram:

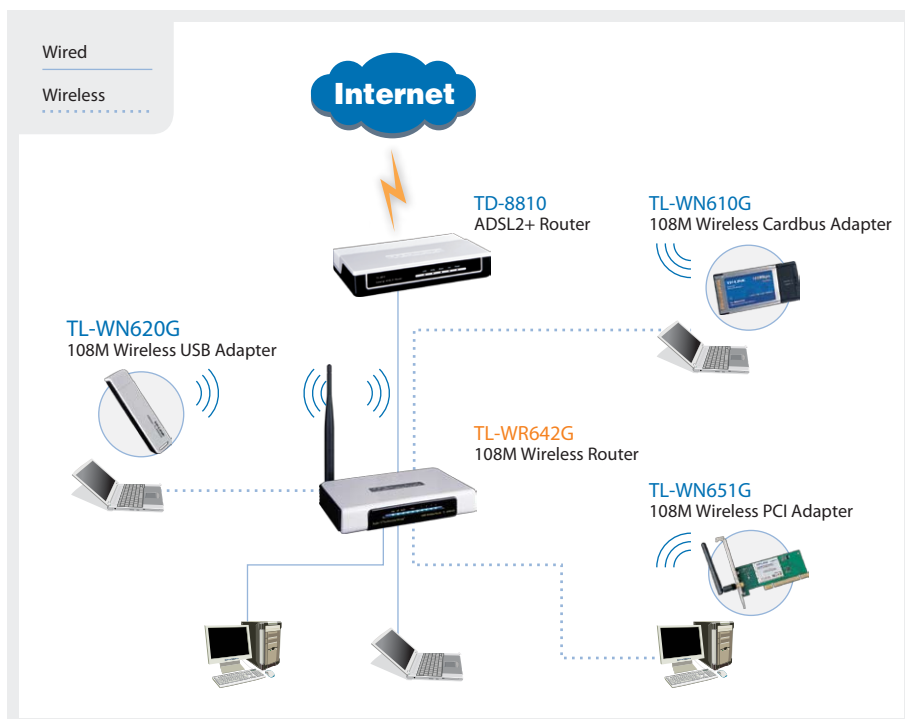

Features:

- Adopts 2x to 3x eXtended Range™ and 108M Super G™ technologies, brings smooth net-chatting & video stream.
- Supports 108/54/48/36/24/18/12/9/6Mbps or 11/5.5/2/1Mbps data transfer rates.
- Shares data and Internet access for users, supporting PPPoE, Dynamic IP, Static IP, L2TP, PPTP, BigPond Cable Internet access.
- Built-in firewall supporting IP address filtering, Domain Name filtering, and MAC address filtering, Supports Flow Statistics,
- Supports Virtual Server, Special Application and DMZ host, Supports UPnP, Dynamic DNS, Static Routing, VPN Pass-through.
- Supports time-based access control
- Supports wireless bridge mode
- Provides 64/128/152-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK data security and TKIP/AES encryption, Wireless LAN ACL (Access Control List).
- Supports web-site firmware upgrade, Remote and local Web management.
- Detachable Antenna (reverse SMA connector).

Package:

- 108M Wireless router TL-WR642G
- Power supply unit (localized to country of sale)
- 3dBi detachable Omni directional antenna
- Resource CD
- Quick Setup Guide

Related Products:

- 108M Wireless USB Adapter TL-WN620G
- 108M Wireless PCI Adapter TL-WN651G
- 10/100M Desktop Switch TL-SF1008D
- External ADSL2+ Router TD-8810

Specifications are subject to change without notice. is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies Co., Ltd.