

PJD7383i

INTERACTIVE XGA SHORT THROW PROJECTOR

120HZ AND 3D READY


3D
ready



Interactive presentations come to life.

The PJD7383i is an advanced interactive short throw DLP® projector which includes BrilliantColor™ technology to produce more vibrant colors, while the high brightness and contrast ratios make this projector shine in virtually any lighting situation. The PJD7383i delivers 3000 lumens with a 1024x768 XGA native resolution. Priced at just a fraction of the cost of a traditional 77" interactive white board, the ViewSonic® iProjector provides ultimate flexibility for interactive learning.

1 + 1 = 2

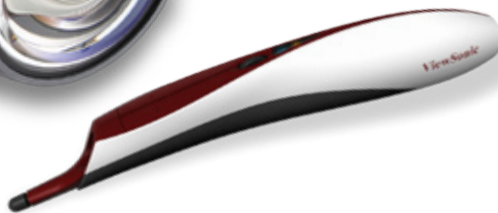

VERSATILE PRESENTATION ANYWHERE

- > **Short throw lens for large, stunning images in small places**
The short throw lens enables large images to be projected from short distances in small rooms with short throw distances. A screen size of 81-inch is possible from just 39 inches.

- > **Interactive pen**
The self contained (IWB) interactive white board functionality along with the included pen works with a variety of software to get the entire class involved in the learning process.

- > **BrilliantColor™ technology**
BrilliantColor technology delivers stunning all-digital clarity with life-like color, sharp graphics and outstanding video. The 6-segment color wheel enhances the yellow color performance that is key to accurate and vivid color reproduction.

- > **Network control through RJ45**
Schedule, manage and monitor the projector remotely and receive e-mail alerts of projector lamp status. Use the unique integrated clock to perform commands even when the host PC is powered down.
- > **Eco-mode extends lamp life**
Extend the life of your lamp up to 6,000 hours and reduce noise output.
- > **Supports Crestron RoomView® Express**
Manage up to 250 network projectors in real time monitoring and control. Manage assets, schedule events and program email alerts with this amazing software.

CRESTRON
RoomView®
express



VIEWSONIC
PRODUCTS, PROGRAMS,
AND SERVICES

ViewSonic®
See the difference®



PJD7383i

INTERACTIVE XGA SHORT THROW DLP® iPROJECTOR – 120HZ AND 3D-READY



Optional Accessories

- > Replacement Lamp RLC-057
- > Short throw mount WMK-027
- > Wireless G Presentation Gateway WPG-360
- > Extended Express Exchange® PRJ-EE-08-03

Projection Distance		4:3 Aspect Ratio	
M	Feet	M	Inches
0.5	1.6	1.0	39.3
1.0	3.3	2.06	81.1
1.2	3.9	2.44	95.9
1.5	4.9	3.06	120.5
2.5	8.2	5.12	201.6
3.7	12.1	7.56	297.5

DISPLAY

Type	0.55" Digital Micromirror Device (DLP™)
Resolution	XGA 1024x768 (Native)
Lens	Fixed Lens / Manual Focus
Keystone	Vertical digital keystone correction: +/- 40 degrees
Display Size (Diagonal)	30"-300" / .762m-7.62m
Throw Distance	0.37m-3.7m / 1.2ft-12.21ft
Throw Ratio	0.61:1
Lamp	210 watt
Lamp Life (Normal / Eco-mode)	4000 / 6000 hours*
Brightness	3000 Lumens
Contrast Ratio	2000:1 static (typ); 3000:1 (dynamic)
Aspect Ratio	4:3 (native) and 16:9
Color Depth	24 bits, 16.7M color (8+8+8)
Color Wheel	6-Segment RGBCYW / 7200rpm
Color Gamut	90% NTSC 1931 CIE

INPUT SIGNAL

Computer and Video	NTSC M (3.58 MHz), 4.43MHz, PAL (B, D, G, H, I, M, N, 60), SECAM (B, D, G, K, K1, L), SD 480i/576i, ED 480p/576p, HD 720p/1080i
--------------------	---------------------------------------------------------------------------------------------------------------------------------

COMPATIBILITY

Frequency	F _H : 31-100KHz, F _V : 48-120Hz
PC	VGA to UXGA
Mac®	Up to UXGA (scaled)

CONNECTOR

RGB Input	15-pin mini D-sub (x2)
RGB Output	15-pin mini D-sub
Composite Input	RCA jack
S-video Input	4-pin mini-DIN
Audio Input	3.5mm mini jack (x1), RCA (L/R)x1
Audio Output	3.5mm mini jack
Mic-In	3.5mm mini jack
12V trigger	3.5mm/1A
Control	RS-232 (9-pin mini-DIN)/RJ-45

AUDIO

Speaker	10W (x1)
Voltage	100~240VAC (Auto Switching), 50/60Hz (universal)
Consumption	298W (typ) / 1W (stand-by mode)

CONTROLS

Basic	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, auto, mode/enter, source
OSD	Picture: Brightness, contrast, color setting, keystone, aspect ratio, image, white intensity, gamma, 3D sync, 3D sync invert

Computer Image Picture: Brightness, contrast, color setting, keystone, aspect ratio, image, white intensity, gamma, 3D sync, 3D sync invert

Computer Image: Frequency, tracking, H position, V position

Video Image: Saturation, sharpness, tint

Setting: Menu position, projection, signal type, lamp hour, lamp hour reset, filter hours, filter hours reset, power saving, auto source, Eco-mode, high altitude, OSD timeout

OPERATING CONDITIONS

Temperature	32°F-104°F (0°C-40°C)
Humidity	10%-90% (non-condensing)
Altitude	0-6,000 ft. (1,800m), operational up to 10,000 ft. (3048m)

NOISE LEVEL DIMENSIONS (W x H x D)

Normal / Eco-mode	32dB / 27dB
Physical	11.4" x 5.0" x 10.0" / 290mm x 126mm x 254mm
Packaging	15.0" x 8.3" x 15.4" / 380mm x 210mm x 392mm
Net	7.7 lb. (3.5 kg)
Gross	12.1 lb. (5.5 kg)

REGULATIONS

CB, UL, FCC (including ICES-003), CE, UL-Argentina, NOM, TUV-GS, GOST-R, SASO, Ukraine, PSB, C-Tick, Korean-eK, Hygiene, WEEE, RoHS

PACKAGE CONTENTS

ViewSonic projector, power cable, VGA cable, interactive pen, laser remote control with batteries, lens cap, soft case, Quick Start Guide, ViewSonic Wizard CD (with User Guide)

WARRANTY

3-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year Express Exchange® service**



ViewSonic Corporation's OMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

Sales: (888) 881-8781 . SalesInfo@ViewSonic.com . ViewSonic.com

*Running eco-mode exclusively can extend lamp life. **See ViewSonic.com for full Express Exchange details. Specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Crestron RoomView is a registered trademark of Crestron Electronics, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments and BrilliantColor™ is a trademark of Texas Instruments. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2010 ViewSonic Corporation. All rights reserved [15133-02B-09/10] PJD7383i-1

ViewSonic®
See the difference® 

For more product information, visit us on the web at ViewSonic.com