



N-Channel 30-V (D-S) MOSFET with Schottky Diode

PRODUCT SUMMARY


V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
30	0.0120 @ $V_{GS} = 10$ V	11
	0.0175 @ $V_{GS} = 4.5$ V	9.5

FEATURES


- LITTLE FOOT® Plus
- 100% R_g Tested

SCHOTTKY PRODUCT SUMMARY

V_{DS} (V)	V_{SD} (V) Diode Forward Voltage	I_F (A)
30	0.53 V @ 3 A	4



Ordering Information: Si4852DY
Si4852DY-T1 (with Tape and Reel)



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter		Symbol	10 secs	Steady State	Unit
Drain-Source Voltage (MOSFET)		V _{DS}	30		V
Reverse Voltage (Schottky)		V _{DA}	30		
Gate-Source Voltage		V _{GS}	± 20		
Continuous Drain Current (T _J = 150°C) (MOSFET) ^a	T _A = 25°C	I _D	11	8.7	A
	T _A = 70°C		9.0	7.0	
Pulsed Drain Current (MOSFET)		I _{DM}	50		
Continuous Source Current (MOSFET Diode Conduction) ^a		I _S	2.3	1.3	
Average Foward Current (Schottky)		I _F	4.0	2.5	
Pulsed Foward Current (Schottky)		I _{FM}	50		
Maximum Power Dissipation (MOSFET) ^a	T _A = 25°C	P _D	2.5	1.47	W
	T _A = 70°C		1.6	0.94	
Maximum Power Dissipation (Schottky) ^a	T _A = 25°C		2.27	1.38	
	T _A = 70°C		1.45	0.88	
Operating Junction and Storage Temperature Range		T _J , T _{stg}	-55 to 150		°C

THERMAL RESISTANCE RATINGS

Parameter		Symbol	MOSFET		Schottky		Unit
			Typ	Max	Typ	Max	
Maximum Junction-to-Ambient ^a	$t \leq 10$ sec	R_{thJA}	40	50	45	55	$^\circ\text{C/W}$
	Steady-State		72	85	75	90	
Maximum Junction-to-Foot (Drain)	Steady-State	R_{thJF}	18	22	20	25	

Notes

a. Surface Mounted on 1" x 1" FR4 Board.

MOSFET SPECIFICATIONS ($T_J = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED).

Parameter	Symbol	Test Condition	Min	Typ ^a	Max	Unit
Static						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	1			V
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			± 100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 24 V, V _{GS} = 0 V		0.007	0.100	mA
		V _{DS} = 24 V, V _{GS} = 0 V, T _J = 100°C		1.5	10	
		V _{DS} = 24 V, V _{GS} = 0 V, T _J = 125°C		6.5	20	
On-State Drain Current ^b	I _{D(on)}	V _{DS} ≥ 5 V, V _{GS} = 10 V	20			A
Drain-Source On-State Resistance ^b	r _{DS(on)}	V _{GS} = 10 V, I _D = 11 A		0.0100	0.0120	Ω
		V _{GS} = 4.5 V, I _D = 9.5 A		0.0145	0.0175	
Forward Transconductance ^b	g _{fs}	V _{DS} = 15 V, I _D = 11 A		28		S
Schottky Diode Forward Voltage ^b	V _{SD}	I _S = 3.0 A, V _{GS} = 0 V		0.485	0.53	V
		I _S = 3.0 A, V _{GS} = 0 V, T _J = 125°C		0.416	0.47	
Dynamic ^a						
Total Gate Charge	Q _g	V _{DS} = 15 V, V _{GS} = 5 V, I _D = 11 A		24	35	nC
Gate-Source Charge	Q _{gs}			9		
Gate-Drain Charge	Q _{gd}			7.5		
Gate Resistance	R _g		0.5		2.6	Ω
Turn-On Delay Time	t _{d(on)}	V _{DD} = 15 V, R _L = 15 Ω I _D ≅ 1 A, V _{GEN} = 10 V, R _G = 6 Ω		17	30	ns
Rise Time	t _r			10	20	
Turn-Off Delay Time	t _{d(off)}			60	100	
Fall Time	t _f			18	30	
Source-Drain Reverse Recovery Time	t _{rr}	I _F = 3.0 A, di/dt = 100 A/μs		40	70	

Notes

- a. Guaranteed by design, not subject to production testing.
b. Pulse test; pulse width $\leq 300\ \mu\text{s}$, duty cycle $\leq 2\%$.


SCHOTTKY SPECIFICATIONS ($T_J = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage Drop	V_F	$I_F = 3.0\ \text{A}$		0.485	0.53	V
		$I_F = 3.0\ \text{A}, T_J = 125^\circ\text{C}$		0.416	0.47	
Maximum Reverse Leakage Current	I_{rm}	$V_r = 24\ \text{V}$		0.007	0.100	mA
		$V_r = 24\ \text{V}, T_J = 100^\circ\text{C}$		1.5	10	
		$V_r = -24\ \text{V}, T_J = 125^\circ\text{C}$		6.4	20	
Junction Capacitance	C_T	$V_r = 10\ \text{V}$		115		pF




TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)


Output Characteristics

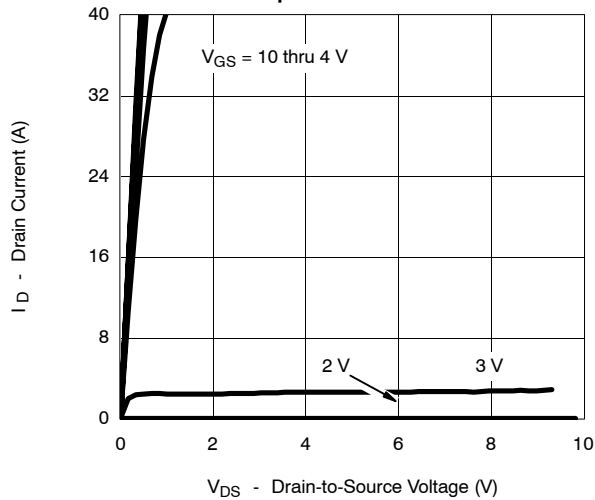


Transfer Characteristics

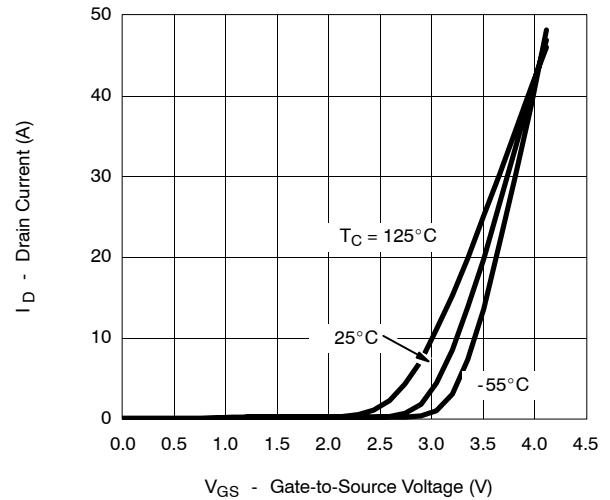


On-Resistance vs. Drain Current

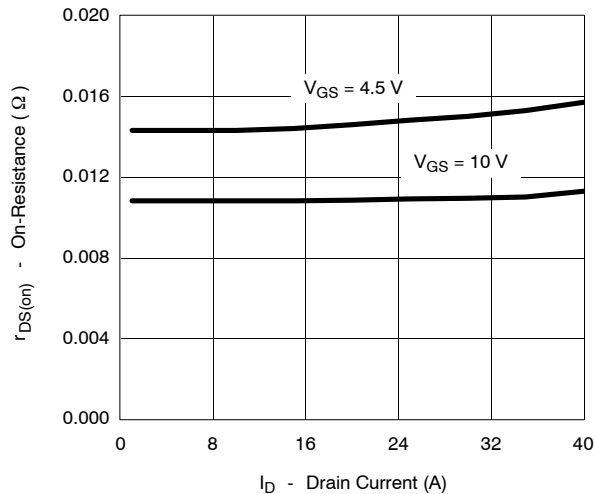


Capacitance

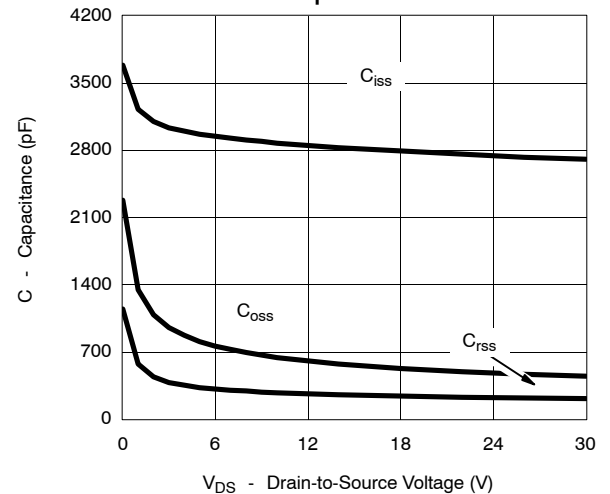






Gate Charge

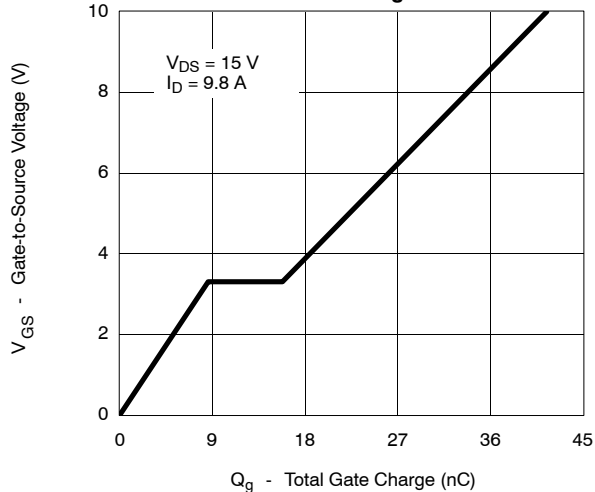

On-Resistance vs. Junction Temperature

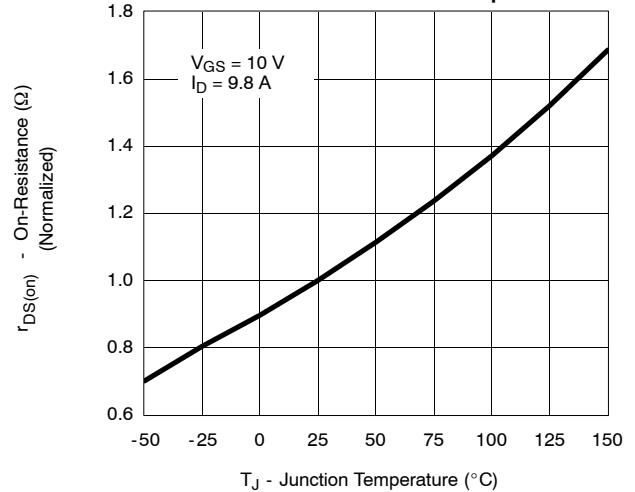


TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

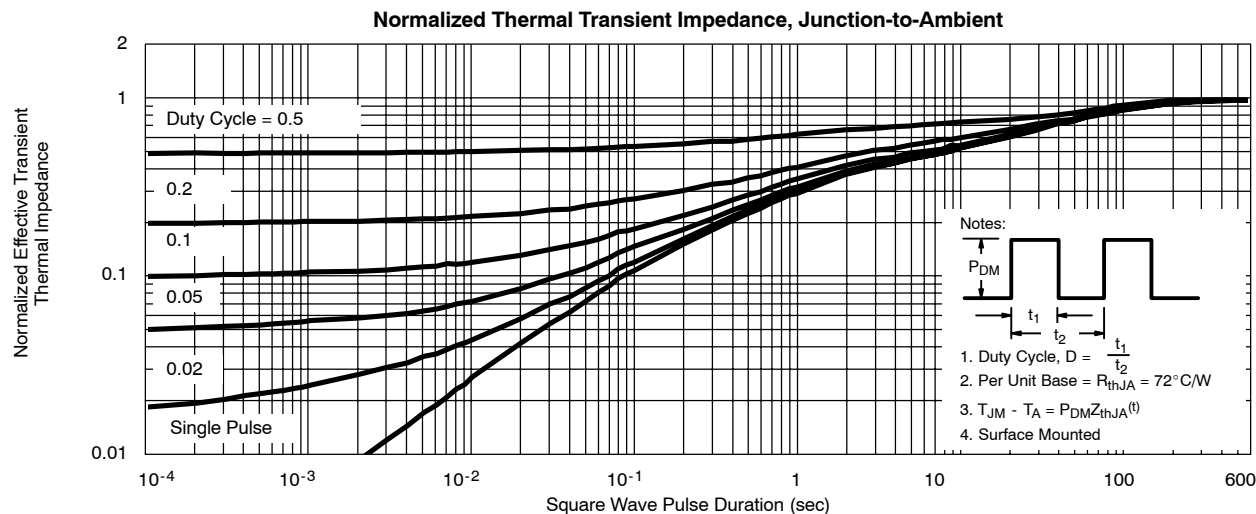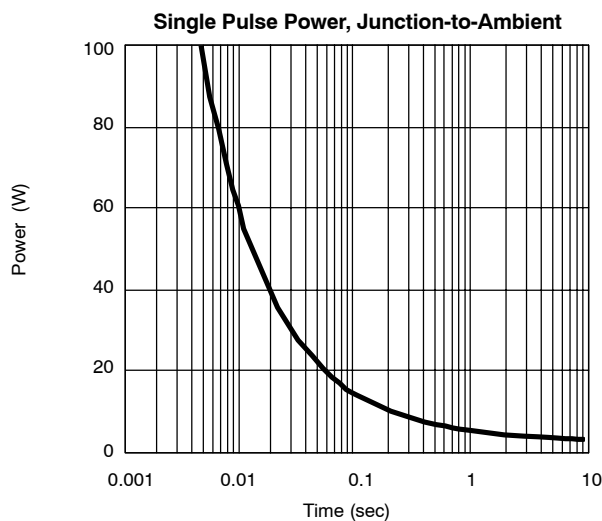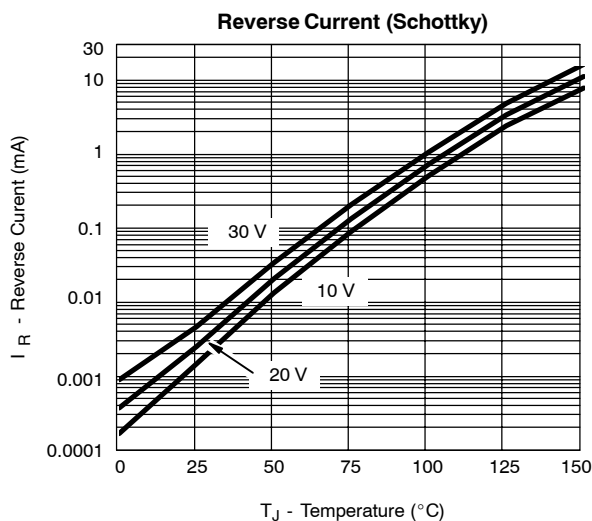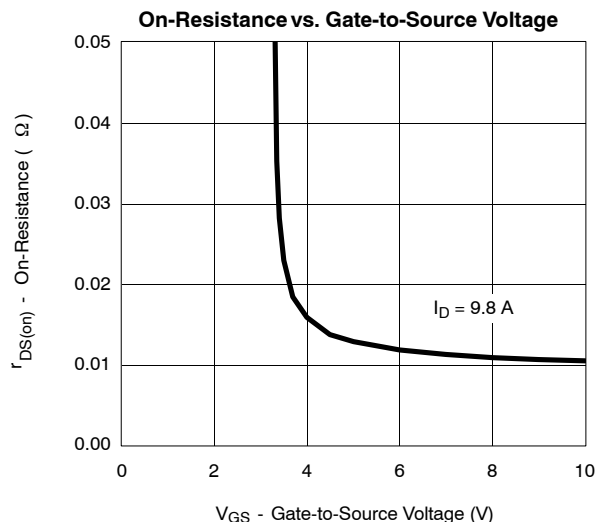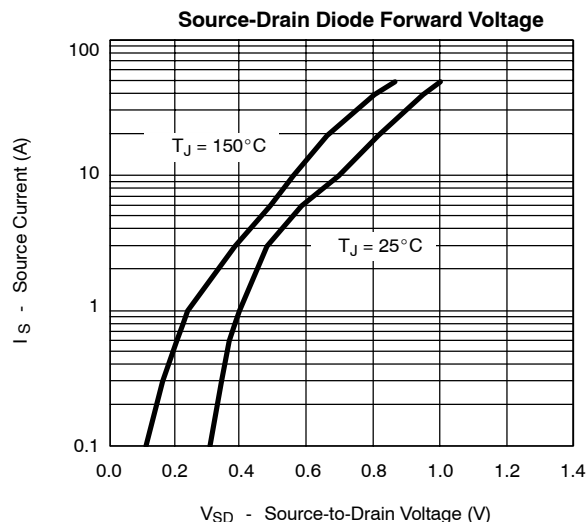



TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

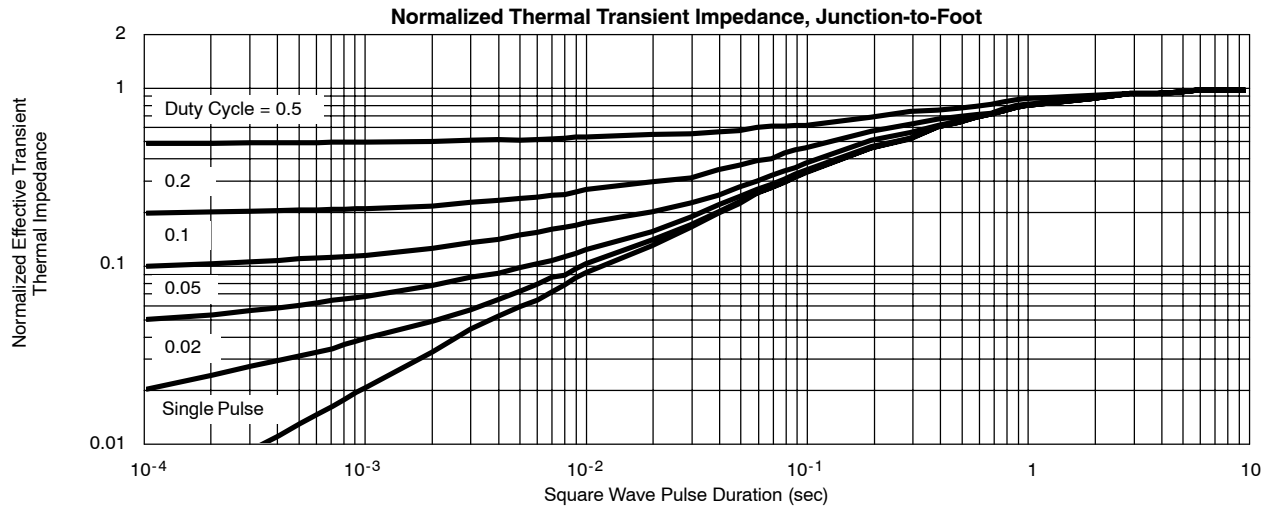



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.