


Data Sheet


Features

- For AMPS, CDMA and TDMA applications
- Usable bandwidth 25 MHz (each band)
- High Tx-Rx isolation
- Low insertion loss
- High attenuation
- Single-ended operation
- No matching required for operation at 50Ω
- Ceramic Surface Mount Package (SMP)
- Hermetic
- RoHS compliant (2002/95/EC), Pb-free 

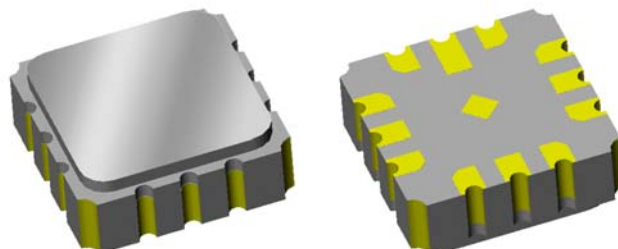


Package

Surface Mount 3.80 x 3.80 x 1.47 mm

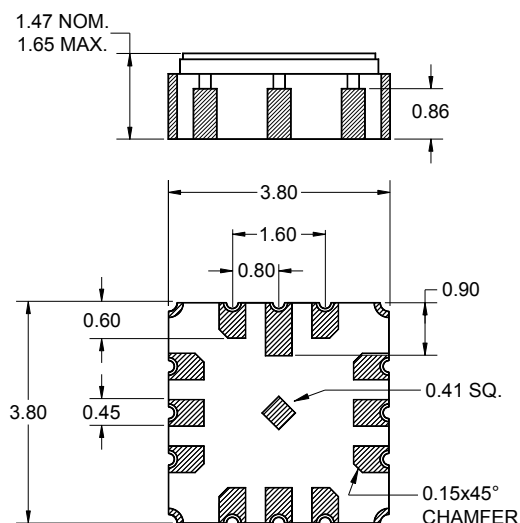

Pin Configuration

Bottom View



Pin No.	Description
5	Tx
8	Antenna
11	Rx
1,2,3,4,6	Case ground
7,9,10,12	Case ground

Dimensions shown are nominal in millimeters
All tolerances are ± 0.15 mm except overall
length and width ± 0.10 mm

Body: Al_2O_3 ceramic
Lid: Kovar, Ni plated
Terminations: Au plating 0.5 - 1.0μm,
over a 2 - 6μm Ni plating

Data Sheet

Electrical Specifications ⁽¹⁾

Operating Temperature: ⁽²⁾ +25 °C

Parameter ⁽³⁾	Minimum	Typical	Maximum	Unit
Tx-Ant Specification				
Center Frequency	-	836.5	-	MHz
Maximum Insertion Loss ⁽⁴⁾ 824 - 849 MHz	-	1.8	2.3	dB
Amplitude Ripple 824 - 849 MHz	-	0.4	0.9	dB
Absolute Attenuation 869 - 894 MHz	45	49	-	dB
1050 - 1100 MHz	18	22	-	dB
1250 - 1325 MHz	12	16	-	dB
Second Harmonic Attenuation 1648 - 1698 MHz	7	9	-	dB
Third Harmonic Attenuation 2472 - 2547 MHz	8	10	-	dB
Return Loss at Tx Terminal ⁽⁴⁾ 824 - 849 MHz	10	13	-	dB
Ant-Rx Specification				
Center Frequency	-	881.5	-	MHz
Maximum Insertion Loss ⁽⁴⁾ 869 - 894 MHz	-	2.5	3.0	dB
Amplitude Ripple 869 - 894 MHz	-	1.0	1.4	dB
Absolute Attenuation 779 - 804 MHz	35	40	-	dB
824 - 849 MHz	51	55	-	dB
1039 - 1065 MHz	35	40	-	dB
1100 - 1270 MHz	38	45	-	dB
1648 - 1698 MHz	30	41	-	dB
2472 - 2547 MHz	15	20	-	dB
Return Loss at Rx Terminal ⁽⁴⁾ 869 - 894 MHz	10	13	-	dB
Tx-Rx Specification				
Tx to Rx Isolation 824 - 849 MHz	55	59	-	dB
869 - 894 MHz	45	48	-	dB

Notes:

1. All specifications are based on the test circuit shown on page 5
2. This specification is valid for room temperature only. The specification over the full temperature range(s) is available on the next page(s)
3. Electrical margin has been built into the design to account for the variations due to manufacturing tolerances
4. Excluding losses due to PCB

Data Sheet

Electrical Specifications ⁽¹⁾

Operating Temperature Range: ⁽²⁾ -30 to +85 °C







Parameter ⁽³⁾	Minimum	Typical	Maximum	Unit
Tx-Ant Specification				
Center Frequency	-	836.5	-	MHz
Maximum Insertion Loss ⁽⁴⁾ 824 - 849 MHz	-	1.8	2.5	dB
Amplitude Ripple 824 - 849 MHz	-	0.4	1.1	dB
Absolute Attenuation 869 - 894 MHz	45	48	-	dB
1050 - 1100 MHz	18	22	-	dB
1250 - 1325 MHz	12	16	-	dB
Second Harmonic Attenuation 1648 - 1698 MHz	7	9	-	dB
Third Harmonic Attenuation 2472 - 2547 MHz	8	10	-	dB
Return Loss at Tx Terminal ⁽⁴⁾ 824 - 849 MHz	10	13	-	dB
Ant-Rx Specification				
Center Frequency	-	881.5	-	MHz
Maximum Insertion Loss ⁽⁴⁾ 869 - 894 MHz	-	2.5	3.5	dB
Amplitude Ripple 869 - 894 MHz	-	1.0	2.2	dB
Absolute Attenuation 779 - 804 MHz	35	40	-	dB
824 - 849 MHz	50	54	-	dB
1039 - 1065 MHz	35	40	-	dB
1100 - 1270 MHz	38	45	-	dB
1648 - 1698 MHz	30	41	-	dB
2472 - 2547 MHz	15	20	-	dB
Return Loss at Rx Terminal ⁽⁴⁾ 869 - 894 MHz	9	12	-	dB
Tx-Rx Specification				
Tx to Rx Isolation 824 - 849 MHz	54	58	-	dB
869 - 894 MHz	44	48	-	dB

Notes:

1. All specifications are based on the test circuit shown on page 5
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Excluding losses due to PCB

Data Sheet


Typical Performance

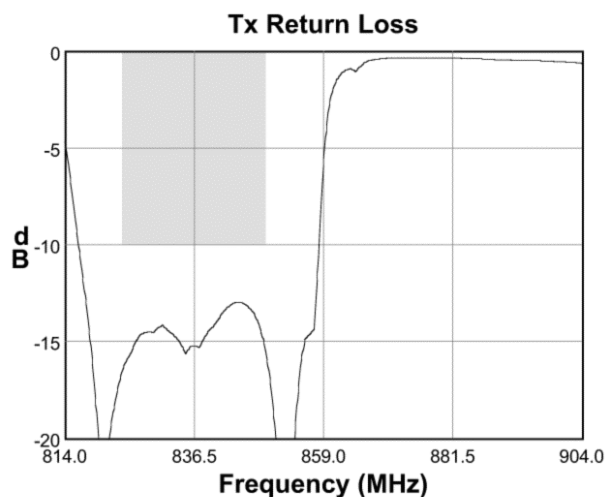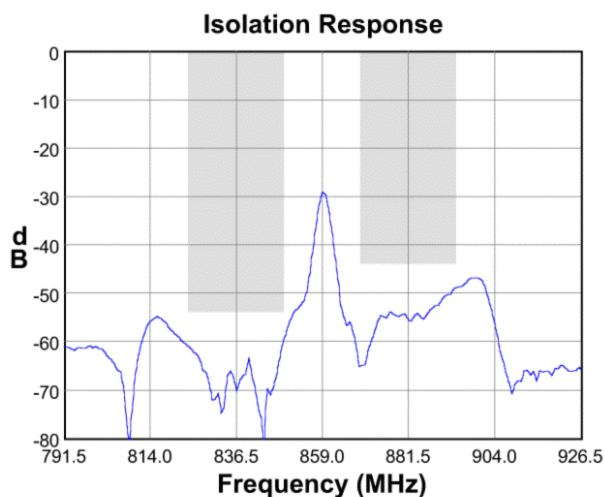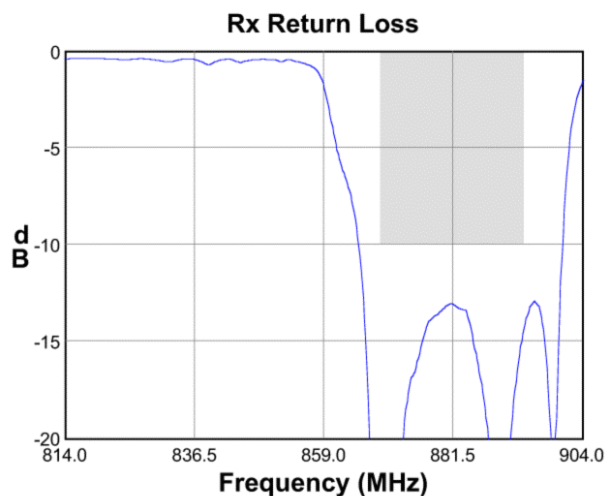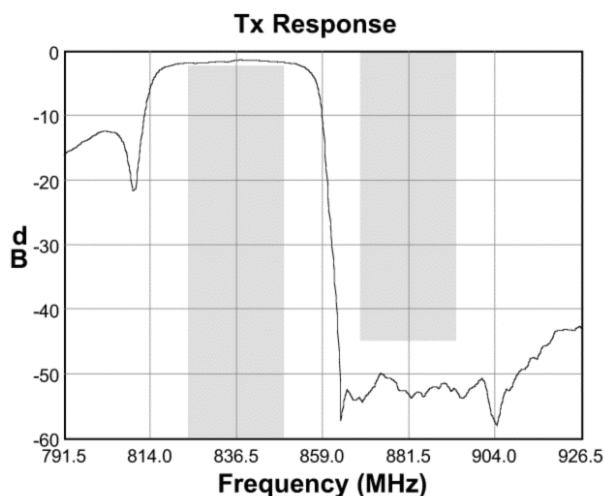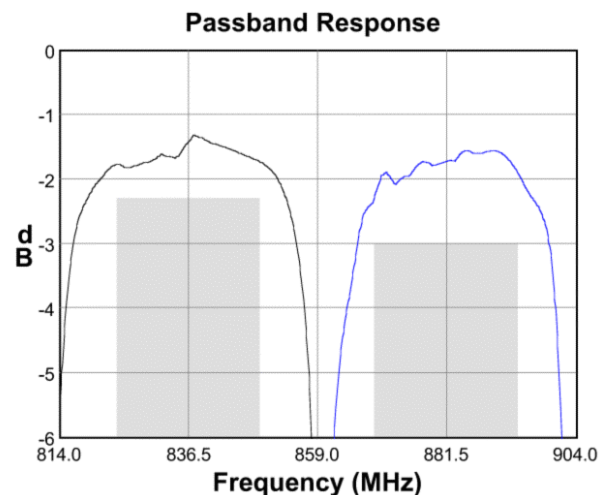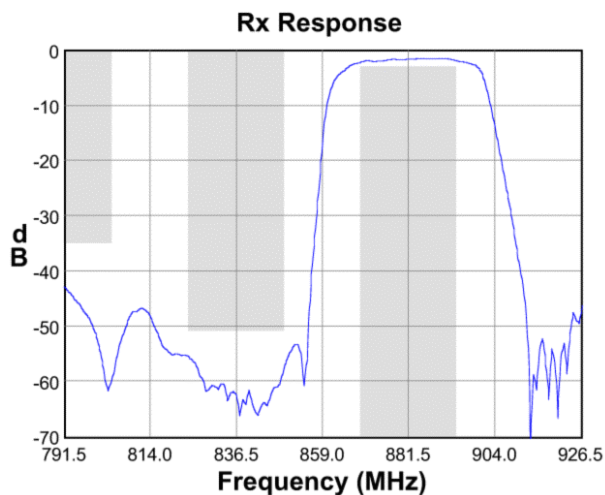

Data Sheet


Test Circuits

50 Ω
Single-ended

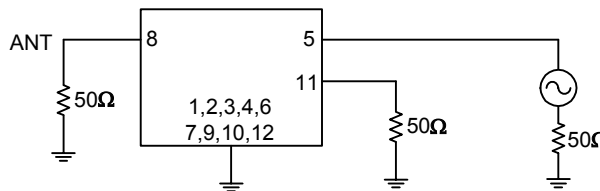


No impedance matching
required

50 Ω
Single-ended

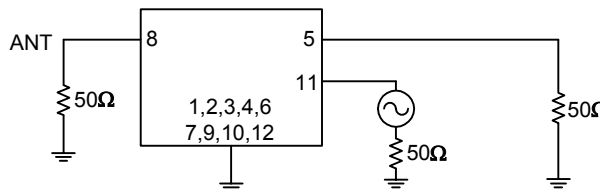


No impedance matching
required

Marking

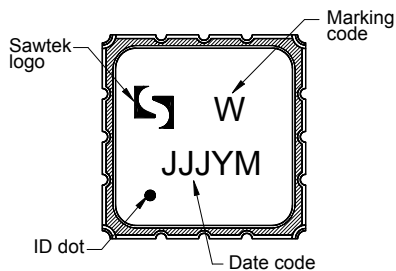



The date code consists of: JJJ = Julian day,
Y = last digit of year, M = manufacturing site code

PCB Footprint

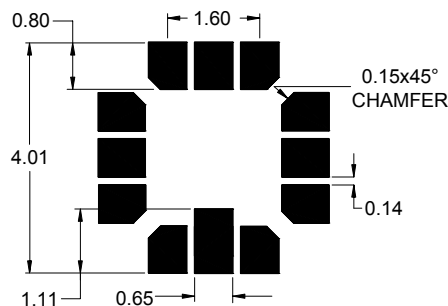

This footprint represents a recommendation only
Dimensions shown are nominal in millimeters

Tape and Reel

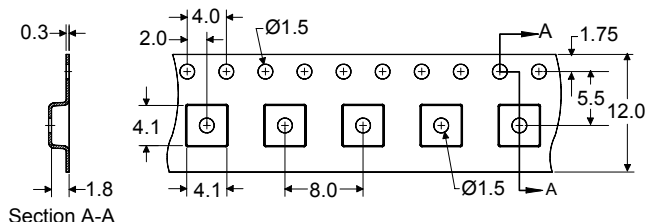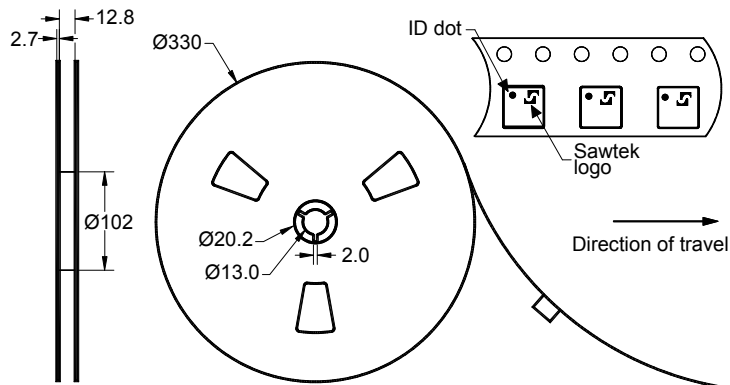

Dimensions shown are nominal in millimeters
Packaging quantity: 4000 units/reel

Data Sheet

Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Unit
Operating Temperature Range	T	-30	+85	°C
Storage Temperature Range	T _{stg}	-40	+85	°C
RF Power	P _{in}	-	+31	dBm

Important Notes

Warnings

- Electrostatic Sensitive Device (ESD)
- Avoid ultrasonic exposure



RoHS Compliance

- This product complies with EU directive 2002/95/EC (RoHS)



Solderability

- Compatible with JEDEC J-STD-020C **Pb**-free process, **260°C** peak reflow temperature ([see soldering profile](#))

Links to Additional Technical Information

[PCB Layout Tips](#)[Qualification Flowchart](#)[Soldering Profile](#)[S-Parameters](#)[RoHS information](#)[Other Technical Information](#)

Sawtek's liability is limited only to the Surface Acoustic Wave (SAW) component(s) described in this data sheet. Sawtek does not accept any liability for applications, processes, circuits or assemblies, which are implemented using any Sawtek component described in this data sheet.

Contact Information



PO Box 609501
Orlando, FL 32860-9501
USA

Phone: +1 (407) 886-8860
Fax: +1 (407) 886-7061
Email: custservice@sawtek.com
Web: www.sawtek.com

Or contact one of our worldwide
Network of [sales offices](#),
[representatives or distributors](#)