

Actual information about approvals can be found on
<http://www.schurter.com/approvals>



4781

C15



120° C

Description

- Rewireable connector:
Screw-on
- Outlet, Pin temperature 120 °C, Protection class I
- Cable
- Substitute for type [8943.W](#)


Technical data

Ratings IEC	10 A / 250 VAC; 50 Hz
Ratings UL/CSA	15 A / 250 VAC; 60 Hz
Dielectric strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable operation temp.	-25 °C to 120 °C
Protection class	Suitable for appliances with protection class I acc. to IEC 61140

Terminals	Cable
Materials: Housing	Thermoplastic, black, UL 94V-0
Appliance-inlet /-outlet	C15 acc. to IEC/EN 60320-1, UL 498, CSA C22.2 no. 42 (for warm condition) pin-temperature 120 °C, 10 A, Protection class I

Dimensions

4781

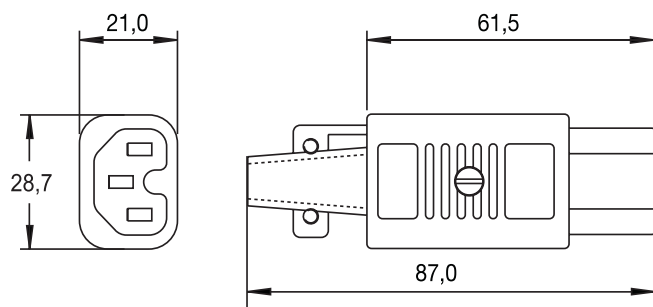

Variants

Order Number	Color	Max. cable diameter	Max. wire size
4781.0000	black	8.5 mm	3 x 1 mm ² / 3 x 18 AWG
4781.0100	black	10.0 mm	3 x 2 mm ² / 3 x 14 AWG

Max. torque for screws: Terminal: 0.5 Nm, Cable clamp: 0.3 Nm, Cover: 0.3 Nm
 Cord retaining clamp see accessories

Packaging unit

100 Pcs

Accessories

[ACCESSORIES](#)