


Actual information about approvals can be found on
<http://www.schurter.com/approvals>



6600-3

F


 70 °C

Description

- Panel mount:
Screw-on version from front side
- Outlet, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

Other versions on request:

- Types for rivet mounting available upon request


Technical data

Ratings IEC	10 A / 250 VAC; 50 Hz
Ratings UL/CSA	15 A / 250 VAC; 60 Hz
Dielectric strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable operation temp.	-25 °C to 70 °C
Degree of protection	from front side IP30 acc. to IEC 60529
Protection class	Suitable for appliances with protection class I acc. to IEC 61140

Terminals	Solder terminals or quick connect terminals
Panel thickness s	Screw-on: max 8 mm Mounting screw torque max 0.5 Nm
Materials: Housing	Thermoplastic, black, UL 94V-0
Appliance-inlet /-outlet	F acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold condition) pin-temperature 70 °C, 10 A, Protection class I

Dimensions

6600-3

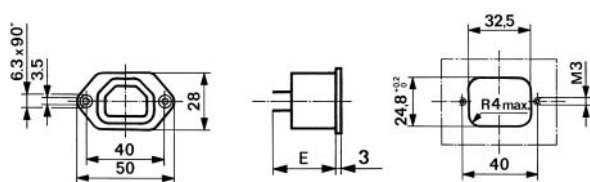

E = solder terminals 3.5x0.8mm	24.1 mm
E = quick connect terminals 4.8x0.8mm	26.5 mm
E = quick connect terminals 6.3x0.8mm	27.5 mm

Variants

Order Number	Panel mounting	Panel thickness s [mm]	Terminals
6600.3200	Screw-on		Quick connect terminals 4.8 x 0.8 mm
6600.3300	Screw-on		Quick connect terminals 6.3 x 0.8 mm
6600.3100	Screw-on		Solder terminals 3.8 x 0.8 mm

1) Minimum order quantity for rivet mount types required
Cord retaining clamp and insulation cover see accessoires

Packaging unit	50 Pcs	Accessories	ACCESSORIES
----------------	--------	-------------	-------------