



Thyristor-Diode Module

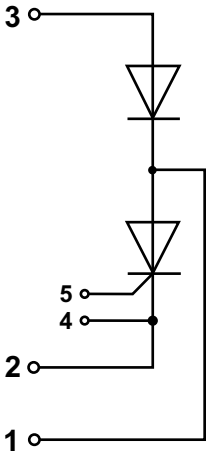

Type	V_{RSM}	V_{RRM} , V_{DRM}
SMTD-160H-08	1000	800
SMTD-160H-12	1400	1200
SMTD-160H-14	1600	1400
SMTD-160H-16	1800	1600
SMTD-160H-18	2000	1800
SMTD-160H-20	2200	2000
SMTD-160H-22	2400	2200
SMTD-160H-24	2600	2400

Type	I_{TAVM} , I_{FAVM}	I_{TRMS} , I_{FRMS}	T_C	I_{TSM} , I_{FSM}	$(di/dt)_{cr}$	$(dv/dt)_{cr}$	V_{TM}	I_{TM} , I_{FM}	V_{TO}	r_T	t_q	V_{GT}	I_{GT}	T_{VJM}	V_{isol}	R_{thJC}
	A	A	°C	kA	A/μs	V/μs	V	A	V	mΩ	μs	V	mA	°C	V	K/W
SMTD-160H	160	290	85	5.4	100	500	1.9	480	0.85	1.6	150	2.5	100	125	2500	0.2

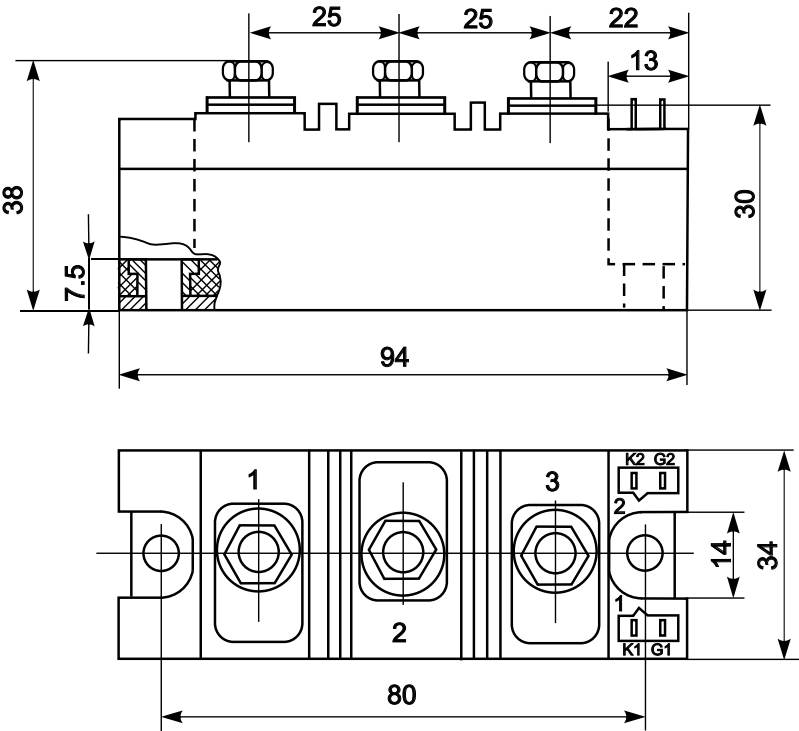

- Features:
- Industrial standard package
 - Heat tranasfer through aluminium nitride ceramic isolated metal baseplate
 - Precise internal pressure contacts for high reability
 - 2500V RMS isolation voltage

- Typical Applications:
- DC motor control
 - AC motor soft starter
 - Temperature control (e.g. for ovens, chemical processes)
 - Lighting control