


Tag-it™ HF-I Transponder Inlay

- Rectangle-Large -

The Tag-it HF-I Transponder Inlay is compliant with the ISO/IEC 15693 standard. With a user memory of 2k bits, organized in 64 blocks, the Tag-it HF-I Transponder Inlays allows advanced solutions for a variety of applications, including product authentication, ticketing, library management, supply chain management etc. The thin and flexible Tag-it HF-I Transponder Inlays can be easily converted into paper or plastic labels.

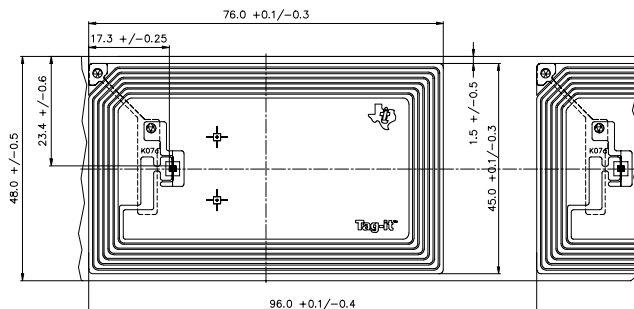

Specifications:

Part Number	RI-102-112A	RI-102-112B
Supported Standard	ISO 15693-2,-3	
Recommended Operating frequency	13.56 MHz	
Passive Resonance Frequency (at +25°C)	13.86 MHz ± 200kHz (includes frequency offset to compensate further integration into paper)	14.4 MHz ± 200kHz (includes frequency offset to compensate PVC lamination)
Typ. required activation field strength read (at +25°C)	94 dBμA/m #	94 dBμA/m *
Typ. required activation field strength write (at +25°C)	97 dBμA/m #	97 dBμA/m *
Factory programmed Read Only Number	64 bits	
Memory (user programmable)	2k bits organized in 64 x 32-bit blocks	
Typical programming cycles (at +25°C)	100,000	
Data retention time (at +55°C)	> 10 years	
Simultaneous Identification of Tags	Up to 50 tags per second (reader/antenna dependent)	
Antenna size	45 mm x 76 mm (~1.77 in x ~2.99 in)	
Foil width	48 mm ± 0.5 mm (1.89 in ± 0.02 in)	
Foil pitch	96 mm +0.1mm/-0.4mm (~3.78 in)	
Thickness	Chip: 0.355mm (~0.014 in) Antenna: 0.085mm (~0.0033 in)	
Base material	Substrate: PET (Polyethylenetherephthalate) Antenna: Aluminum	
Smallest bending radius allowed	18 mm (~0.71 in)	
Operating temperature	-25°C to +70°C	
Storage temperature (single inlay)	-40°C to +85°C (warping may occur at upper temperature range)	
Storage temperature (on reel)	-40°C to +40°C	
Delivery	Single row tape wound on cardboard reel with 500 mm diameter Reel outer width: approx. 60 mm (~2.36 in) Reel inner width: approx. 50 mm (~1.97 in) Hub diameter: 76.2 mm (3 in)	
Typical quantity of good units per reel	5,000	

Note: For highest possible read-out coverage we recommend to operate readers at a modulation depth of 20% or higher

After integration into paper; * After PVC Lamination


For more information, contact the sales office or distributor nearest you. This contact information can be found on our web site at: <http://www.ti-rfid.com>

Supported Command Set

		Request Mode				
Request	Request Code	Inventory	Addressed	Non-Addressed	Select	AFI
ISO 15693 Mandatory and Optional Commands						
Inventory	0x01	✓	-	-	-	✓
Stay Quiet	0x02	-	✓	-	-	-
Read_Single_Block	0x20	✓	✓	✓	✓	✓
Write_Single_Block	0x21	-	✓	✓	✓	-
Lock_Block	0x22	-	✓	✓	✓	-
Read_Multi_Blocks	0x23	✓	✓	✓	✓	✓
Write_Multi_Blocks	0x24	-	-	-	-	-
Select Tag	0x25	-	✓	-	-	-
Reset to Ready	0x26	-	✓	✓	✓	-
Write_AFI	0x27	-	✓	✓	✓	-
Lock_AFI	0x28	-	✓	✓	✓	-
Write_DSFI	0x29	-	✓	✓	✓	-
Lock_DSFI	0x2A	-	✓	✓	✓	-
Get_System_info	0x2B	✓	✓	✓	✓	✓
Get_M_Blks_Sec_St	0x2C	✓	✓	✓	✓	✓
TI Custom Commands						
Write_2_Blocks	0xA2	-	✓	✓	✓	-
Lock_2_Blocks	0xA3	-	✓	✓	✓	-

✓: Implemented
 -: Not applicable

Memory Organization

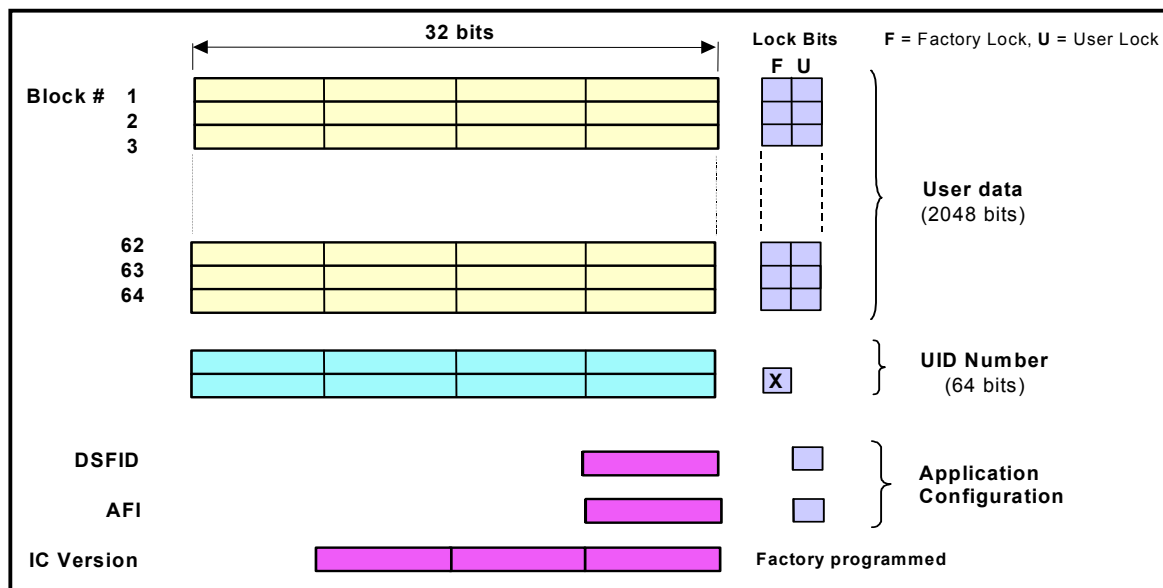

Texas Instruments reserves the right to change its products and services at any time without notice. TI provides customer assistance in various technical areas, but does not have full access to data concerning the uses and applications of customers products. Therefore, TI assumes no responsibility for customer product design or for infringement of patents and/or the rights of third parties, which may result from assistance provided by TI.

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com