

TA78DM05S, TA78DM08S, TA78DM09S, TA78DM12S

5V, 8V, 9V, 12V


LOW DROPOUT VOLTAGE REGULATOR

The TA78DMxxS series consists of positive fixed output voltage regulator IC capable of sourcing current up to 500mA.

Due to the features of low dropout voltage and low standby current, these devices are useful for battery powered equipment.


FEATURES

- Low Standby Current of 800 μ A Typical.
- Maximum Output Current Up to 500mA.
- Low Dropout Voltage of Less than 0.75V (IO = 0.5A).
- Multi-protection : Reverse Connection of Power Supply, 60V Load Dump, Thermal Shut Down and Current Limiting.
- Metal Fin (Tab) is Fully Covered with Mold Resin. (TO-220 NIS package)

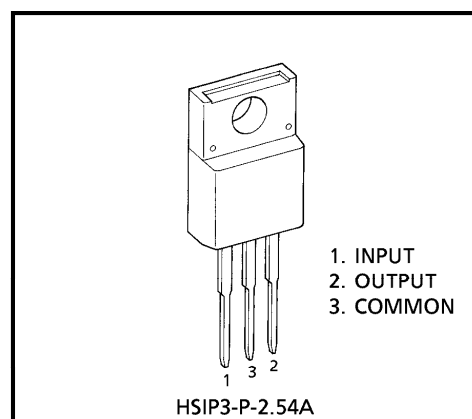

Weight : 1.7g (Typ.)

BLOCK DIAGRAM

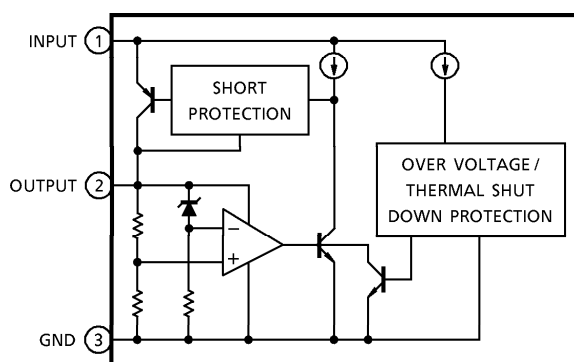

961001EBA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Operating Input Voltage	V_{IN}	29	V
Input Voltage of Surge	V_{IN}	60	V
Power Dissipation	P_D	2	W
		20	
Operating Temperature	T_{opr}	$-40 \sim 85$	$^\circ\text{C}$
Storage Temperature	T_{stg}	$-55 \sim 150$	$^\circ\text{C}$
Thermal Resistance	$R_{th(j-c)}$	6.25	$^\circ\text{C/W}$
	$R_{th(j-a)}$	62.5	
Storage Temperature-Time	T_{sol}	260 (10s)	$^\circ\text{C}$

TA78DM05S

ELECTRICAL CHARACTERISTICS(Unless otherwise specified, $V_{IN} = 14\text{V}$, $I_{OUT} = 250\text{mA}$, $T_j = 25^\circ\text{C}$, $C_{IN} = 0.1\mu\text{F}$, $C_{OUT} = 100\mu\text{F}$)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{OUT}	—	—	4.75	5	5.25	V
			$6\text{V} \leq V_{IN} \leq 26\text{V}$, $5\text{mA} \leq I_{OUT} \leq 250\text{mA}$	4.7	—	5.3	
Line Regulation	Reg-line	—	$6\text{V} \leq V_{IN} \leq 26\text{V}$	—	3	30	mV
Load Regulation	Reg-load	—	$V_{IN} = 6\text{V}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$	—	66	240	mV
			$V_{IN} = 26\text{V}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$	—	40	240	
Quiescent Current	I_{CC}	—	$6\text{V} \leq V_{IN} \leq 26\text{V}$, $I_{OUT} = 0\text{mA}$	—	0.8	1.4	mA
			$6\text{V} \leq V_{IN} \leq 26\text{V}$, $I_{OUT} = 250\text{mA}$	—	14	27	
Dropout Voltage	V_{DROP}	—	$I_{OUT} = 250\text{mA}$	—	0.2	0.35	V
			$I_{OUT} = 500\text{mA}$	—	0.4	0.75	
Short Circuit Current Limit	I_{SC}	—	—	—	0.7	—	A

TA78DM08S

ELECTRICAL CHARACTERISTICS(Unless otherwise specified, $V_{IN} = 16\text{V}$, $I_{OUT} = 250\text{mA}$, $T_j = 25^\circ\text{C}$, $C_{IN} = 0.1\mu\text{F}$, $C_{OUT} = 100\mu\text{F}$)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{OUT}	—	—	7.6	8	8.4	V
			$9\text{V} \leq V_{IN} \leq 26\text{V}$, $5\text{mA} \leq I_{OUT} \leq 250\text{mA}$	7.52	—	8.48	
Line Regulation	Reg-line	—	$9\text{V} \leq V_{IN} \leq 26\text{V}$	—	6	48	mV
Load Regulation	Reg-load	—	$V_{IN} = 9\text{V}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$	—	54	380	mV
			$V_{IN} = 26\text{V}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$	—	47	380	
Quiescent Current	I_{CC}	—	$9\text{V} \leq V_{IN} \leq 26\text{V}$, $I_{OUT} = 0\text{mA}$	—	0.9	1.5	mA
			$9\text{V} \leq V_{IN} \leq 26\text{V}$, $I_{OUT} = 250\text{mA}$	—	16	27	
Dropout Voltage	V_{DROP}	—	$I_{OUT} = 250\text{mA}$	—	0.2	0.35	V
			$I_{OUT} = 500\text{mA}$	—	0.4	0.75	
Short Circuit Current Limit	I_{SC}	—	—	—	0.7	—	A

TA78DM09S

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, $V_{IN} = 16V$, $I_{OUT} = 250mA$, $T_j = 25^\circ C$, $C_{IN} = 0.1\mu F$, $C_{OUT} = 100\mu F$)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{OUT}	—	—	8.55	9	9.45	V
			$10V \leq V_{IN} \leq 26V$, $5mA \leq I_{OUT} \leq 250mA$	8.46	—	9.54	
Line Regulation	Reg·line	—	$10V \leq V_{IN} \leq 26V$	—	9	54	mV
Load Regulation	Reg·load	—	$V_{IN} = 10V$, $5mA \leq I_{OUT} \leq 500mA$	—	47	430	mV
			$V_{IN} = 26V$, $5mA \leq I_{OUT} \leq 500mA$	—	50	430	
Quiescent Current	I_{CC}	—	$10V \leq V_{IN} \leq 26V$, $I_{OUT} = 0mA$	—	0.9	1.6	mA
			$10V \leq V_{IN} \leq 26V$, $I_{OUT} = 250mA$	—	16	27	
Dropout Voltage	V_{DROP}	—	$I_{OUT} = 250mA$	—	0.2	0.35	V
			$I_{OUT} = 500mA$	—	0.4	0.75	
Short Circuit Current Limit	I_{SC}	—	—	—	0.7	—	A


TA78DM12S

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, $V_{IN} = 18V$, $I_{OUT} = 250mA$, $T_j = 25^\circ C$, $C_{IN} = 0.1\mu F$, $C_{OUT} = 100\mu F$)







CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{OUT}	—	—	11.4	12	12.6	V
			$13V \leq V_{IN} \leq 26V$, $5mA \leq I_{OUT} \leq 250mA$	11.28	—	12.72	
Line Regulation	Reg·line	—	$13V \leq V_{IN} \leq 26V$	—	10	72	mV
Load Regulation	Reg·load	—	$V_{IN} = 13V$, $5mA \leq I_{OUT} \leq 500mA$	—	84	580	mV
			$V_{IN} = 26V$, $5mA \leq I_{OUT} \leq 500mA$	—	45	580	
Quiescent Current	I_{CC}	—	$13V \leq V_{IN} \leq 26V$, $I_{OUT} = 0mA$	—	1.0	1.7	mA
			$13V \leq V_{IN} \leq 26V$, $I_{OUT} = 250mA$	—	16	27	
Dropout Voltage	V_{DROP}	—	$I_{OUT} = 250mA$	—	0.2	0.35	V
			$I_{OUT} = 500mA$	—	0.4	0.75	
Short Circuit Current Limit	I_{SC}	—	—	—	0.7	—	A





APPLICATION CIRCUITS

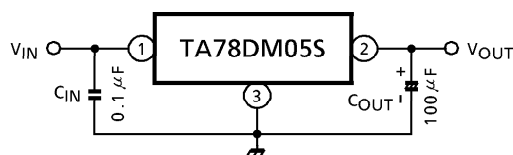

Capacitor C_2 must be guaranteed to operate of the temperature range that the regulator should be operated correctly.


$100\mu F$ is a suitable value to suppress the oscillation phenomenon at the output terminal.

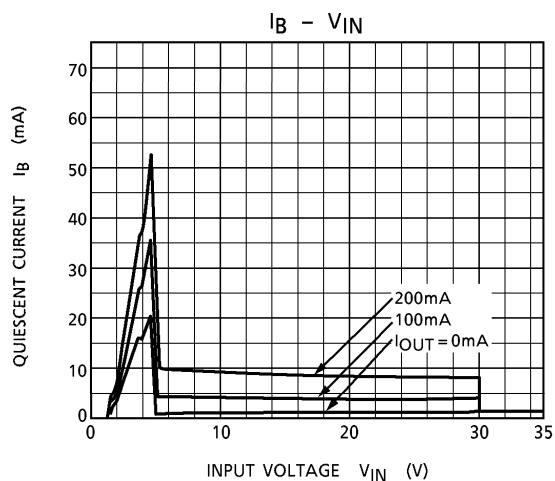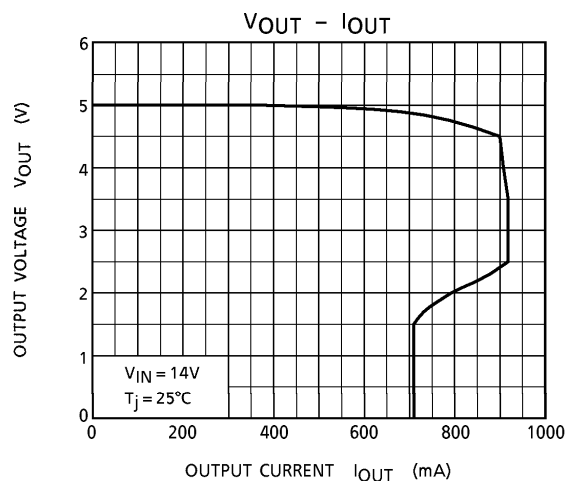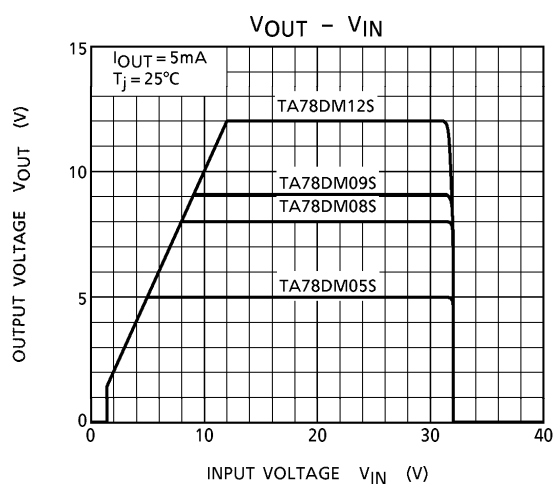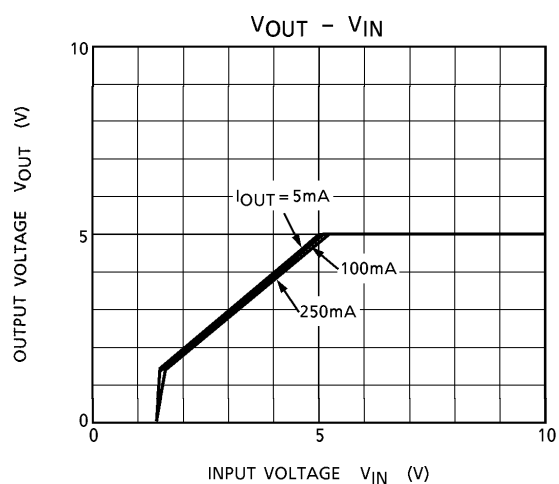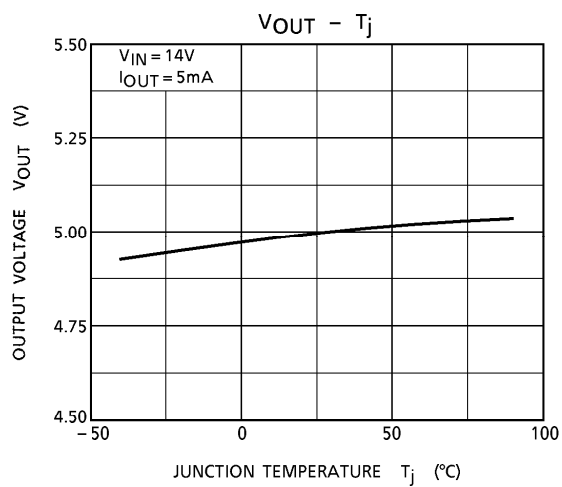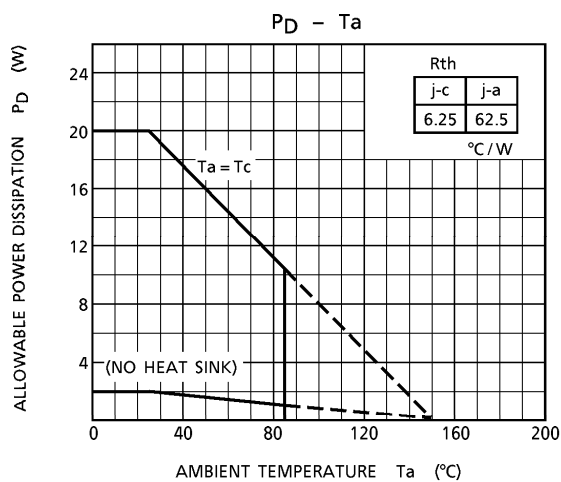

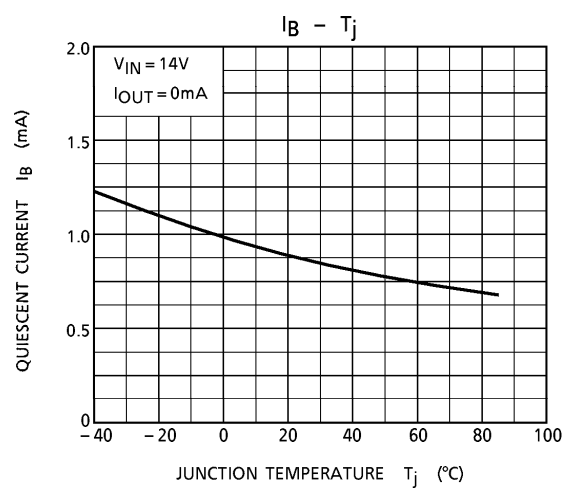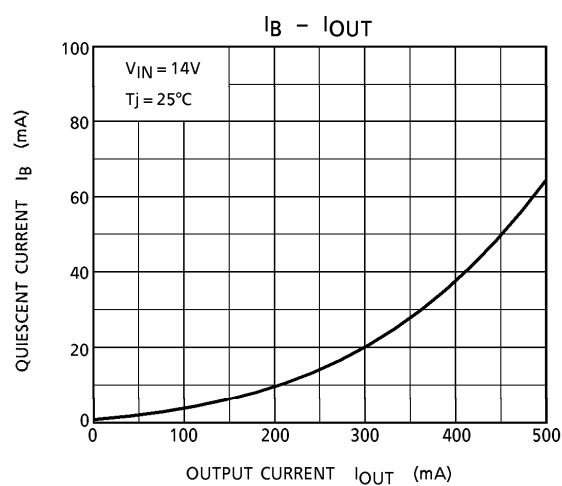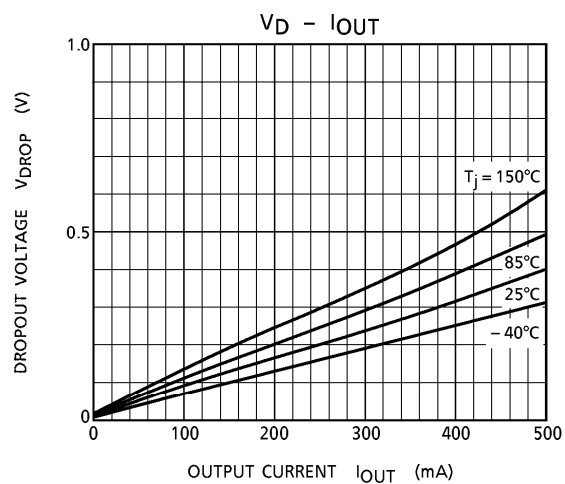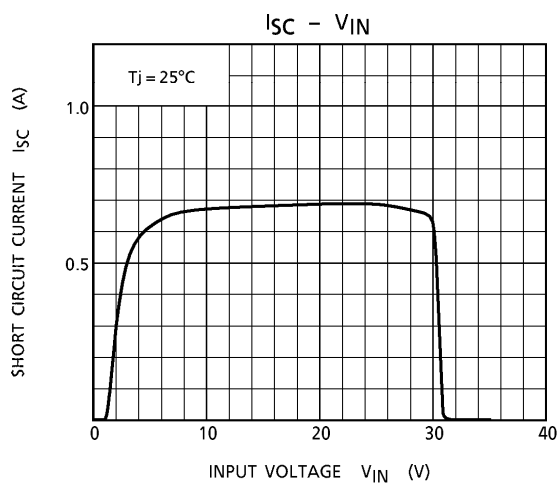

OUTLINE DRAWING
HSIP3-P-2.54A

Unit : mm

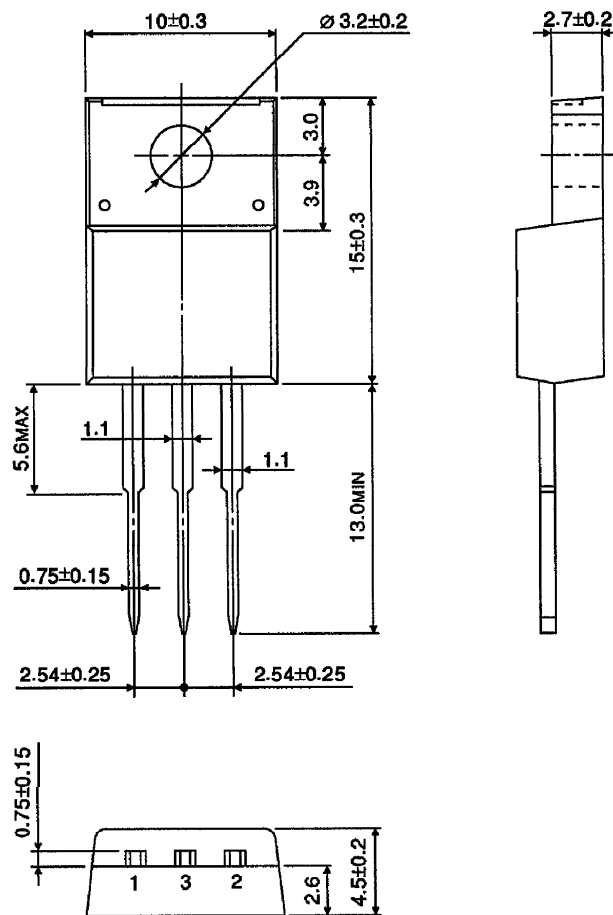

Weight : 1.7g (Typ.)