

TOSHIBA PHOTOCOUPLER GaAlAs IRED & PHOTO-IC

TLP215, TLP216

DIGITAL LOGIC INTERFACE

MICROPROCESSOR SYSTEM INTERFACE

ISOLATED BUS DRIVER

LINE RECEIVER

GROUND LOOP ELIMINATION

The TOSHIBA TLP215 and TLP216 are logic-in and logic-out type photocouplers. Both types consist of three chips : a GaAlAs infrared LED, LS TTL level logic IC LED driver, and photo detector which incorporates both a photo diode and TTL level logic I.C.


TLP215 : Buffer Logic Type

TLP216 : Inverter Logic Type


- Supply Voltage : $V_{CC}=4.5\sim 5.5V$
- Switching Speed : $t_{pHL}, t_{pLH}=5\mu s$ (MAX.)
- Guaranteed Performance Over Temperature : $-25\sim 80^{\circ}C$
- Isolation Voltage : 2500Vrms (MIN.)
- UL Recognized : UL1577, File No. E67349

PIN CONFIGURATIONS (TOP VIEW)


TLP215

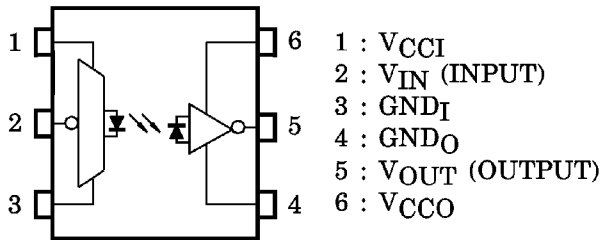

TLP216

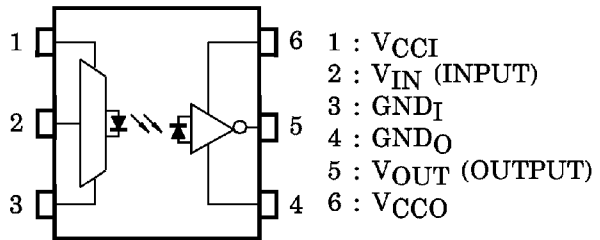

Unit in mm

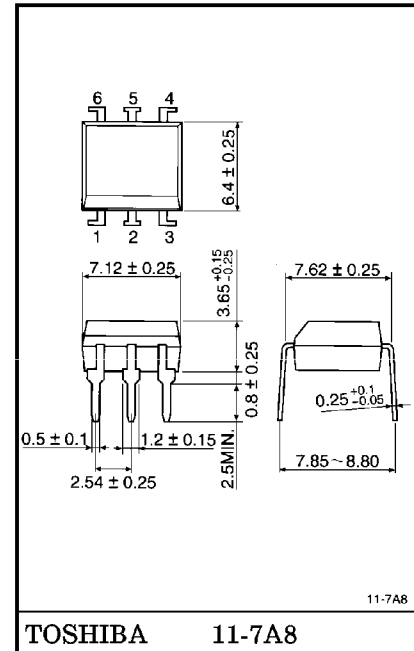

TOSHIBA 11-7A8

Weight : 0.42g

www.DataSheet.in

961001EBC2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

TRUTH TABLE



TLP215	
INPUT	OUTPUT
H	H
L	L

BUFFER LOGIC

TLP216	
INPUT	OUTPUT
H	L
L	H

INVERTER LOGIC

SCHEMATIC

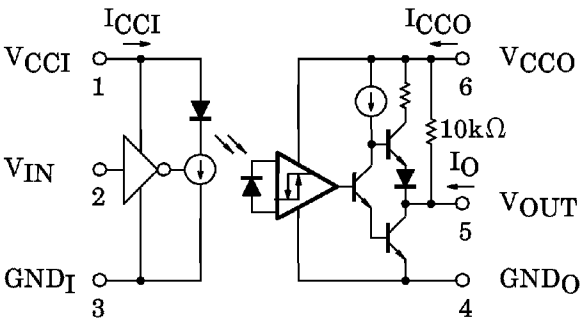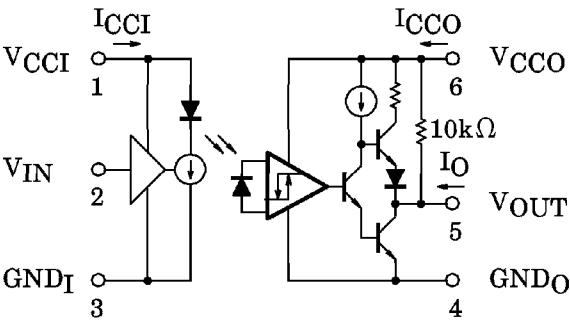

A 0.1μF bypass capacitor must be connected between pin 1 and 3, and between pin 4 and 6.

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
LED	Supply Voltage (Note 1)	V _{CCI}	−0.5~7	V
	Input Voltage	V _{IN}	−0.5~7	V
DETECTOR	Supply Voltage (Note 1)	V _{CCO}	−0.5~7	V
	Output Voltage	V _{OUT}	−0.5~7	V
	Output Current	I _{OUT}	40 / −25	mA
	Output Power Dissipation (Note 2)	P _O	100	mW
Operating Temperature Range		T _{opr}	−40~85	°C
Storage Temperature Range		T _{stg}	−55~125	°C
Solder Temperature (10sec.)**		T _{sol}	260	°C
Isolation Voltage (AC, 1 min., R.H. ≤ 60%, Ta = 25°C) (Note 3)		BV _S	2500	V _{rms}

(Note 1) Max. 1min.

(Note 2) Derate 1.8mW / °C above 70°C.

(Note 3) Pins 1, 2, 3 and 4 shorted together and pins 5, 6, 7 and 8 shorted together.

** Soldering portion of lead : up to 2mm from the body of the device.

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V _{CCI} , V _{CCO}	4.5	5	5.5	V
Input Voltage High	V _{IH}	2	—	V _{CC}	V
Input Voltage Low	V _{IL}	0	—	0.8	V
Output Current High	I _{OH}	—	—	−400	μA
Output Current Low	I _{OL}	—	—	8	mA
Fan Out (TTL Load)	N	—	—	4	—
Operating Temperature	T _{opr}	−25	—	85	°C

TLP215

ELECTRICAL CHARACTERISTICS (Unless otherwise specified, $T_a = -25 \sim 85^\circ\text{C}$, V_{CCI} , $V_{CCO} = 5\text{V}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.*	MAX.	UNIT
Input Supply Voltage	V_{CCI}	—	4.5	5	5.5	V
Output Supply Voltage	V_{CCO}	—	4.5	5	5.5	V
Low Level Input Voltage	V_{IL}	—	—	—	0.8	V
High Level Input Voltage	V_{IH}	—	2.0	—	—	V
Low Level Output Voltage	V_{OL}	$I_{OL} = 8.0\text{mA}$, $V_{IL} = 0.8\text{V}$ $V_{CCO} = 4.5\text{V}$	—	0.3	0.5	V
High Level Output Voltage	V_{OH}	$I_{OH} = -400\mu\text{A}$, $V_{IH} = 2\text{V}$ $V_{CCO} = 4.5\text{V}$	2.7	3.6	—	V
Low Level Input Current	I_{IL}	$V_{CCI} = 5.5\text{V}$, $V_{IL} = 0.4\text{V}$	—	-0.2	-0.4	mA
High Level Input Current	I_{IH}	$V_{CCI} = 5.5\text{V}$, $V_{IH} = 2.7\text{V}$	—	—	20	μA
Input Current at Maximum Input Voltage	I_I	$V_{CCI} = 5.5\text{V}$, $V_{IH} = 6\text{V}$	—	—	0.4	mA
Input Low Level Supply Current	I_{CCLI}	$V_{CCI} = 5.5\text{V}$, $V_{IL} = \text{GND}$	—	7	10	mA
Input High Level Supply Current	I_{CCHI}	$V_{CCI} = 5.5\text{V}$, $V_{IH} = 4.5\text{V}$	—	4	10	mA
Output Low Level Supply Current	I_{CCLO}	$V_{CCO} = 5.5\text{V}$, $V_{IL} = \text{GND}$	—	4	6.0	mA
Output High Level Supply Current	I_{CCHO}	$V_{CCO} = 5.5\text{V}$, $V_{IH} = 4.5\text{V}$	—	4.5	6.0	mA
Low Level Short Circuit Output Current (Note 4)	I_{OSL}	$V_{CCO} = 5.5\text{V}$, $V_{IL} = \text{GND}$ $V_{OUT} = 5.5\text{V}$	25	55	—	mA
High Level Short Circuit Output Current (Note 4)	I_{OSH}	$V_{CCO} = 5.5\text{V}$, $V_{IH} = 4.5\text{V}$ $V_{OUT} = 0\text{V}$	-10	-25	—	mA
Resistance (Input-Output)	R_S	$V_S = 500\text{V}$, R.H. $\leq 60\%$ $T_a = 25^\circ\text{C}$	5×10^{10}	10^{14}	—	Ω
Capacitance (Input-Output)	C_S	$V_S = 0$, $f = 1\text{MHz}$ $T_a = 25^\circ\text{C}$ (Note 3)	—	1.0	—	pF

* All typical values at $T_a = 25^\circ\text{C}$

TLP215

SWITCHING CHARACTERISTICS (Unless otherwise specified, $T_a = 25 \sim 85^\circ\text{C}$, $V_{CCI} = V_{CCO} = 5\text{V}$)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.*	MAX.	UNIT
Propagation Delay Time (L→H) (Note 5)	t_{pLH}	1	$R_L = 2\text{k}\Omega$, $C_L = 15\text{pF}$	—	0.5	5	μs
Propagation Delay Time (H→L) (Note 5)	t_{pHL}			—	0.5	5	μs
Output Rise Time (10–90%)	t_r		$R_L = 2\text{k}\Omega$, $C_L = 15\text{pF}$ $T_a = 25^\circ\text{C}$	—	35	—	ns
Output Fall Time (10–90%)	t_f			—	20	—	ns
Common Mode Transient Immunity at Logic High Output (Note 6)	C_{MH}	2	$V_{CM} = 50\text{V}$ $V_{OUT}(\text{Min.}) = 2\text{V}$ $T_a = 25^\circ\text{C}$	1000	—	—	$\text{V} / \mu\text{s}$
Common Mode Transient Immunity at Logic Low Output (Note 6)	C_{ML}		$V_{CM} = 50\text{V}$ $V_{OUT}(\text{Max.}) = 0.8\text{V}$ $T_a = 25^\circ\text{C}$	–1000	—	—	$\text{V} / \mu\text{s}$

* All typical values are at $T_a = 25^\circ\text{C}$

TLP216

ELECTRICAL CHARACTERISTICS (Unless otherwise specified, Ta = -25~85°C, VCCI, VCCO = 5V)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.*	MAX.	UNIT
Input Supply Voltage	VCCI	—	4.5	5	5.5	V
Output Supply Voltage	VCCO	—	4.5	5	5.5	V
Low Level Input Voltage	VIL	—	—	—	0.8	V
High Level Input Voltage	VIH	—	2.0	—	—	V
Low Level Output Voltage	VOL	IOL = 8.0mA, VIH = 2V VCCO = 4.5V	—	0.3	0.5	V
High Level Output Voltage	VOH	IOH = -400μA VIL = 0.8V, VCCO = 4.5V	2.7	3.6	—	V
Low Level Input Current	IIL	VCCI = 5.5V, VIL = 0.4V	—	-0.2	-0.4	mA
High Level Input Current	IIH	VCCI = 5.5V, VIH = 2.7V	—	—	20	μA
Input Current at Maximum Input Voltage	II	VCCI = 5.5V, VIH = 6V	—	—	0.4	mA
Input Low Level Supply Current	ICCLI	VCCI = 5.5V, VIL = GND	—	4	10	mA
Input High Level Supply Current	ICCHI	VCCI = 5.5V, VIH = 4.5V	—	7	10	mA
Output Low Level Supply Current	ICCLO	VCCO = 5.5V, VIH = 4.5V	—	4	6.0	mA
Output High Level Supply Current	ICCHO	VCCO = 5.5V, VIL = GND	—	4.5	6.0	mA
Low Level Short Circuit Output Current (Note 4)	IOSL	VCCO = 5.5V, VIH = 4.5V VOUT = 5.5V	25	55	—	mA
High Level Short Circuit Output Current (Note 4)	IOSH	VCCO = 5.5V, VIL = GND VOUT = 0V	-10	-25	—	mA
Resistance (Input-Output)	RS	VS = 500V, R.H. ≤ 60% Ta = 25°C	5×10 ¹⁰	10 ¹⁴	—	Ω
Capacitance (Input-Output)	CS	VS = 0, f = 1MHz Ta = 25°C (Note 3)	—	1.0	—	pF

* All typical values are at Ta = 25°C

TLP216

SWITCHING CHARACTERISTICS (Unless otherwise specified, $T_a = -25 \sim 85^\circ\text{C}$, $V_{CCI} = V_{CCO} = 5\text{V}$)

CHARACTERISTIC	SYMBOL	TEST CIR- CUIT	TEST CONDITION	MIN.	TYP.*	MAX.	UNIT
Propagation Delay Time (L→H) (Note 7)	t_{pLH}	1	$R_L = 2\text{k}\Omega$, $C_L = 15\text{pF}$	—	0.5	5	μs
Propagation Delay Time (H→L) (Note 7)	t_{pHL}			—	0.5	5	μs
Output Rise Time (10–90%)	t_r		$R_L = 2\text{k}\Omega$, $C_L = 15\text{pF}$ $T_a = 25^\circ\text{C}$	—	35	—	ns
Output Fall Time (10–90%)	t_f			—	20	—	ns
Common Mode Transient Immunity at Logic High Output (Note 8)	C_{MH}	2	$V_{CM} = 50\text{V}$ $V_{OUT}(\text{Min.}) = 2\text{V}$ $T_a = 25^\circ\text{C}$	–1000	—	—	$\text{V} / \mu\text{s}$
Common Mode Transient Immunity at Logic Low Output (Note 8)	C_{ML}		$V_{CM} = 50\text{V}$ $V_{OUT}(\text{Max.}) = 0.8\text{V}$ $T_a = 25^\circ\text{C}$	1000	—	—	$\text{V} / \mu\text{s}$

* All typical values are at $T_a = 25^\circ\text{C}$

(Note 4) Duration of output short circuit time should not exceed 10ms

(Note 5) The t_{pLH} propagation delay is measured from the point on the trailing edge of the input pulse to the 1.3V point on the leading edge of the output pulse.
The t_{pHL} propagation delay is measured from the point on the leading edge of the input pulse to the 1.3V point on the trailing edge of the output pulse.


(Note 6) C_{ML} is the maximum rate of rise of the common mode voltage that can be sustained with the output voltage in the logic low state ($V_{OUT} < 0.8\text{V}$).
 C_{MH} is the maximum rate of fall of the common mode voltage that can be sustained with the output voltage in the logic low state ($V_{OUT} > 2.0\text{V}$).

(Note 7) The t_{pLH} propagation delay is measured from the point on the trailing edge of the input pulse to the 1.3V point on the leading edge of the output pulse.
The t_{pHL} propagation delay is measured from the point on the leading edge of the input pulse to the 1.3V point on the trailing edge of the output pulse.

(Note 8) C_{ML} is the maximum rate of rise of the common mode voltage that can be sustained with the output voltage in the logic low state ($V_{OUT} < 0.8\text{V}$).
 C_{MH} is the maximum rate of fall of the common mode voltage that can be sustained with the output voltage in the logic low state ($V_{OUT} > 2.0\text{V}$).


(Note 9) A ceramic capacitor ($0.1\mu\text{F}$) should be connected from pin 1 to pin 3, and from pin 4 to pin 6 (V_{CC} -GND) to stabilize the operation of the high gain linear amplifier. Failure to provide the switching property. The total lead length between capacitor and coupler should not exceed 1cm.

TEST CIRCUIT 1 : t_{pLH} , t_{pHL} , t_r and t_f (TLP215)

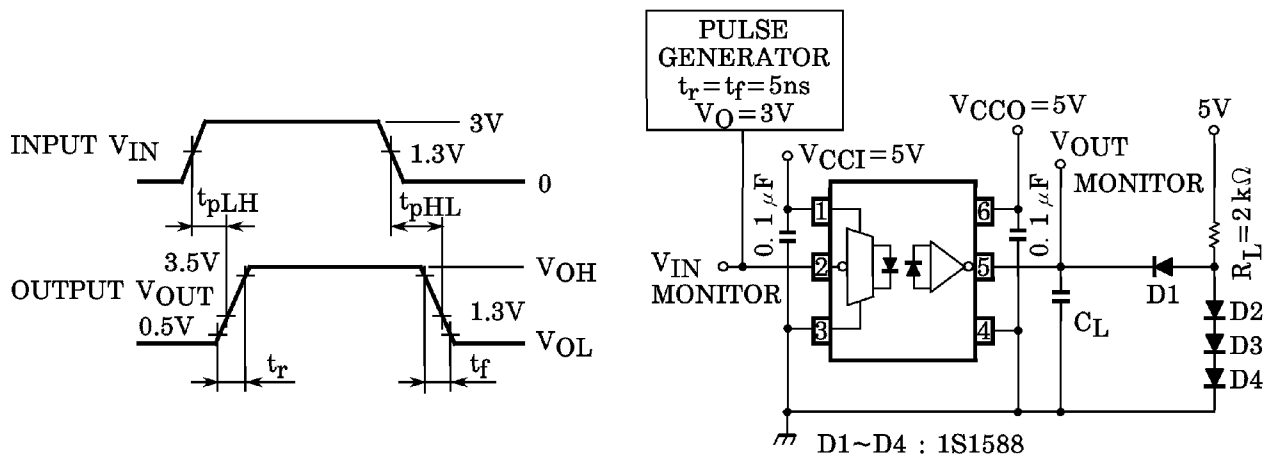


C_L is approximately 15pF which includes probe and stray wiring capacitance.

TEST CIRCUIT 2 : Common Mode Transient Immunity (TLP215)

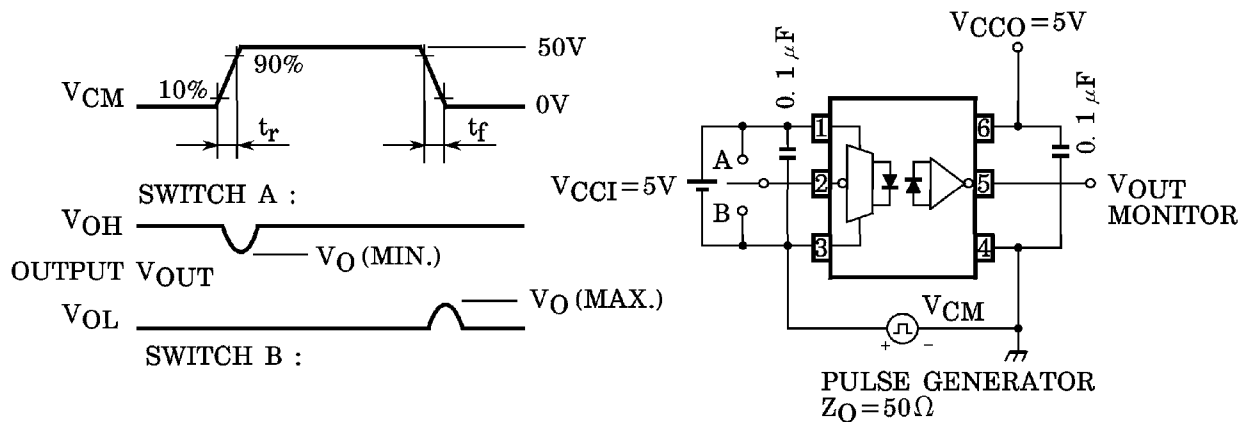

$$CM_H = \frac{45(V)}{t_r(\mu s)}, CM_L = \frac{45(V)}{t_f(\mu s)}$$

TEST CIRCUIT 3 : t_{pLH} , t_{pHL} , t_r and t_f (TLP216)

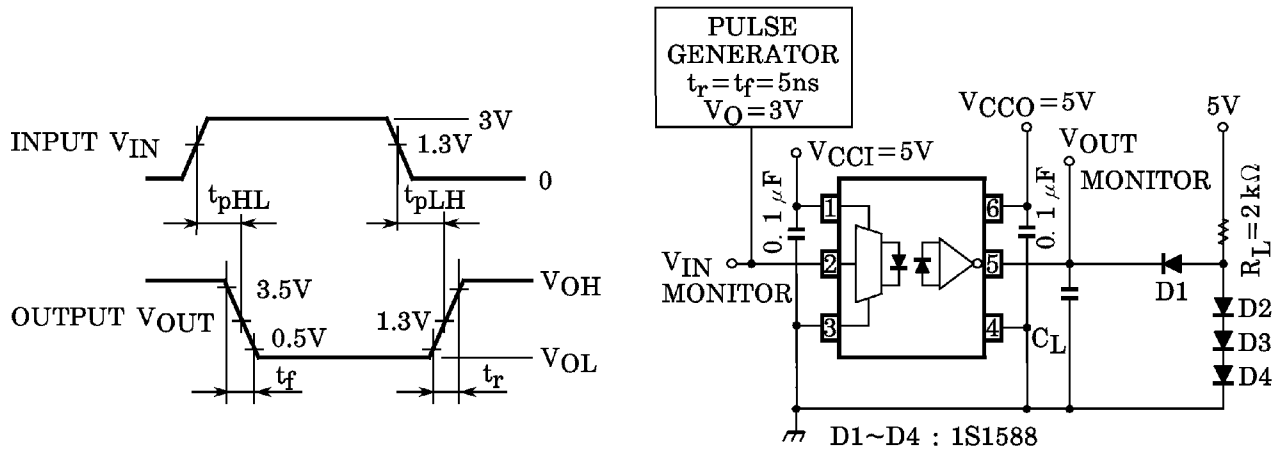

C_L is approximately 15pF which includes probe and stray wiring capacitance.

TEST CIRCUIT 4 : Common Mode Transient Immunity (TLP216)

