


NTC Thermistors, Flex Foil Sensors

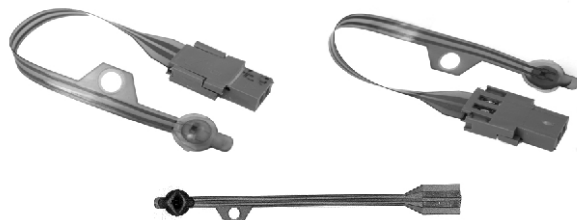

QUICK REFERENCE DATA

PARAMETER	VALUE
Resistance value at 25 °C	47 k Ω
Tolerance on R_{25} value	$\pm 3 \%$
$B_{25/85}$ value	3960K
Tolerance on $B_{25/85}$ value	$\pm 1 \%$
Operating temperature range at zero power	- 40 °C to 125 °C
Climatic category (IEC 60539)	40/125/56
Thermal time constant on heating ⁽¹⁾	2 s
Minimum dielectric withstanding voltage	500 V _{AC}
Minimum insulation resistance	10 M Ω
Maximum dissipation at 25 °C	60 mW
Weight (without connector)	0.13 g
Weight (with connector)	0.53 g

Note

- Measured from 25 °C air to 125 °C heated plate, pressed on the surface

DESIGNER'S OPTIONS

- The sensor can be delivered with a FFC/FPC connector
- The connector termination can be tin or gold plated
- Other dimensions and various shapes of the flex circuit are available on request
- A 3D solid model is available on request

Note

- FFC/FPC = Flexible Film Circuit/Flexible Printed Circuit

FEATURES

- Rapid response time
- Suitable for narrow space applications
- High flexibility of the foil
- Insulated and humidity resistant
- A strain relief hole is included in the flex design to avoid traction to the sensor head
- e3 - Sn
- Compliant to RoHS directive 2002/95/EC


RoHS
COMPLIANT

APPLICATIONS

- Consumer appliances and white goods
- Power supply (aluminum fins)
- Battery, displays
- Industrial applications
- Boilers

DESCRIPTION

- Miniature NTC temperature sensor on flex foil, insulated used for temperature sensing and control
- Surface temperature sensor with low thermal mass and rapid response time on surface

MOUNTING

- The sensor head can be pressed on the surface with means of insulating material (silicone foam) or spring
- The sensor head can also be glued with a double-face temperature resistant adhesive
- The sensor end can be connected to PCB counter-connector or wire-to-wire connector or soldered to conductors, or crimped with FFC connectors
- The strain relief hole can allow a screw mounting, or be included within a melted plastic pin
- Remark: The response time and thermal gradient are dependant of the application and of the way of mounting the sensor in place

ELECTRICAL DATA AND ORDERING INFORMATION

R_{25} VALUE (k Ω)	R_{25} TOL. (%)	$B_{25/85}$ VALUE (K)	$B_{25/85}$ TOL. (%)	SAP MATERIAL NO.	DESCRIPTION	R/T TABLE
47	3	3960	1	NTCAFLEX01473HH	NTC Flex 47K 3 %	Table 1
47	3	3960	1	NTCAFLEX01473HHC	NTC Flex 47K 3 % Connector	Table 1

NTCAFLEX... Series




Vishay BC Components 供应商 NTC Thermistors, Flex Foil Sensors

SAP CODIFICATION

Part Number: NTCAFLEX01473HH

N	T	C	A	F	L	E	X	0	1	4	7	3	H	H	
MODEL	ASSEMBLY	FLEX SENSOR	MECHANICAL EXECUTION	RESISTANCE VALUE	TOLERANCE ON R_{25}	B-VALUE RANGE			CONNECTOR OPTION						
NTC	A	FLEX	01	473 = $47 \times 10^3 \Omega$	H = $\pm 3 \%$	L (low) = $3000 \leq B_{25/85} < 3500$ M (medium) = $3500 \leq B_{25/85} < 3750$ H (high) = $3750 \leq B_{25/85} < 4000$ X (very high) = $4000 \leq B_{25/85} < 4250$			Blank = No connector C = With connector tin plated						

MECHANICAL DATA

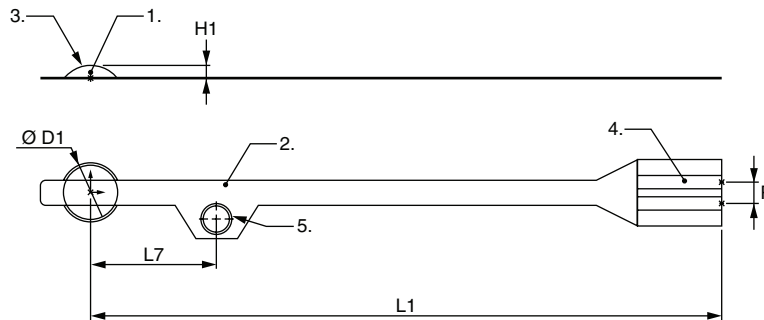

DIMENSIONS in millimeters

L1	L7	Ø D1	H1
75 ± 1	15 ± 1	7 ± 0.5	1.55 ± 0.2

1. NTC SMD soldered on flex foil circuit
2. Flex foil circuit
3. High quality modified epoxy glob top
4. Conductive tracks
5. Hole for strain relief

REFERENCE

Connector 2 positions, 2.54 mm (0.1").

The connector mates with industry standard headers or wire-to-wire connectors.

R/T TABLE 1

R_{25} VALUE (k Ω)	R_{25} TOL. (%)	$B_{25/85}$ VALUE (K)	$B_{25/85}$ TOL. (%)	SAP MATERIAL NO.
47	3	3960	1	NTCAFLEX01473HH
47	3	3960	1	NTCAFLEX01473HHC

TEMP. (°C)	$R(T)/R_{25}$	RESISTANCE (Ω)	$\Delta R/R$ (%)	α (%/K)	ΔT (K)	$R_{min.}$ (Ω)	$R_{max.}$ (Ω)
-40	34.97	1 643 693	10.80	- 6.85	1.58	1 466 123	1 821 262
-35	25.00	1 174 859	10.04	- 6.59	1.52	1 056 912	1 292 806
-30	18.09	850 461	9.31	- 6.34	1.47	771 290	929 633
-25	13.26	623 018	8.61	- 6.11	1.41	569 370	676 666
-20	9.82	461 557	7.94	- 5.89	1.35	424 898	498 216
-15	7.35	345 583	7.30	- 5.69	1.28	320 350	370 816
-10	5.56	261 354	6.69	- 5.49	1.22	243 877	278 831
-5	4.25	199 536	6.10	- 5.31	1.15	187 370	211 702
0	3.27	153 714	5.53	- 5.13	1.08	145 213	162 215
5	2.54	119 427	4.99	- 4.97	1.00	113 473	125 381
10	1.99	93 541	4.46	- 4.81	0.93	89 369	97 714
15	1.57	73 832	3.96	- 4.66	0.85	70 911	76 752
20	1.25	58 703	3.47	- 4.52	0.77	56 666	60 739
25	1.00	47 000	3.00	- 4.38	0.69	45 590	48 410
30	0.81	37 881	3.23	- 4.25	0.76	36 659	39 103
35	0.65	30 726	3.45	- 4.13	0.84	29 667	31 784
40	0.53	25 073	3.66	- 4.01	0.91	24 156	25 990
45	0.44	20 579	3.86	- 3.89	0.99	19 784	21 374
50	0.36	16 984	4.06	- 3.79	1.07	16 294	17 674
55	0.30	14 092	4.26	- 3.68	1.16	13 492	14 692
60	0.25	11 751	4.44	- 3.58	1.24	11 229	12 274
65	0.21	9848	4.63	- 3.49	1.33	9392	10 303
70	0.18	8291	4.80	- 3.40	1.41	7893	8689
75	0.15	7011	4.97	- 3.31	1.50	6663	7360
80	0.13	5955	5.14	- 3.22	1.59	5649	6261
85	0.11	5079	5.30	- 3.14	1.69	4809	5348
90	0.09	4349	5.62	- 3.07	1.83	4104	4593
95	0.08	3738	5.93	- 2.99	1.98	3516	3960
100	0.07	3225	6.23	- 2.92	2.14	3024	3426
105	0.06	2792	6.53	- 2.85	2.29	2610	2974
110	0.05	2425	6.82	- 2.78	2.45	2260	2591
115	0.04	2114	7.10	- 2.72	2.61	1964	2264
120	0.04	1848	7.37	- 2.65	2.78	1712	1985
125	0.03	1621	7.64	- 2.59	2.95	1497	1745

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.