


Lower Voltage Ceramic Disc Capacitors 2 kV_{DC} to 7.5 kV_{DC}

Fig. 1

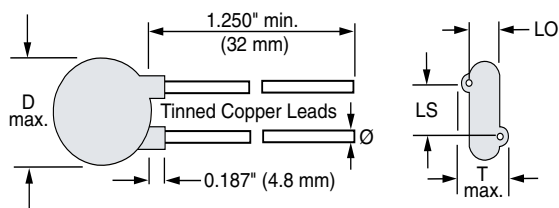

LEAD OFFSET 'LO'		
NOMINAL	~ THICKNESS - 0.100"	
EXCEPTION	0.07" (1.8 mm)	-565R20GAP10
	0.08" (2.0 mm)	-565R30GASS20
	0.10" (2.54 mm)	-565R30GASS33

INSULATION RESISTANCE

2 kV _{DC}	min. 10 000 MΩ
3 kV _{DC}	min. 50 000 MΩ
6 kV _{DC}	min. 75 000 MΩ
7.5 kV _{DC}	min. 200 000 MΩ

TOLERANCE ON CAPACITANCE

± 10 %, ± 20 %, - 20 % to + 80 %

DISSIPATION FACTOR

0.2 % max. at 1 MHz; 1 V
2.0 % max. at 1 kHz; 1 V

CATEGORY TEMPERATURE RANGE

- 25 °C to + 85 °C

CLIMATIC CATEGORY ACC. TO EN60068-1

25/085/21

OPERATING TEMPERATURE RANGE

- 25 °C to + 105 °C

FEATURES

- Low losses
- High capacitance in small sizes
- High stability
- Radial leads
- Compliant to RoHS directive 2002/95/EC



RoHS
COMPLIANT

APPLICATIONS

- Lighting ballasts
- SMPS
- DC and pulse high voltage

DESIGN

The capacitors consist of a ceramic disc of which both sides are silver-plated. Connection leads are made of tinned copper having diameters of 0.025" (0.64 mm) or 0.032" (0.81 mm).

The capacitors may be supplied with radial kinked or straight leads having lead spacing of 0.250" (6.35 mm) or 0.375" (9.5 mm) or 0.500" (12.7 mm)

The standard tolerances are ± 10 % or ± 20 %.

Coating is made of resin coating or flame retardant epoxy resin in accordance with "UL 94 V-0".

CAPACITANCE RANGE

10 pF to 0.10 μF

RATED VOLTAGE

2 kV_{DC}
3 kV_{DC}
6 kV_{DC}
7.5 kV_{DC}

DIELECTRIC STRENGTH BETWEEN LEADS

Component test:

2 kV _{DC}	3500 V _{DC} , 2 s
3 kV _{DC}	5000 V _{DC} , 2 s
6 kV _{DC}	10 500 V _{DC} , 2 s
7.5 kV _{DC}	11 250 V _{DC} , 2 s

CERAMIC DIELECTRIC

C0G, U2J, R3L, (Class 1)
X7R, X5F, X5S, Y5S, Y5U, Y5V, Z5U (Class 2)

564R and 565R Series

Vishay Cera-Mite

Lower Voltage Ceramic Disc Capacitors
2 kV_{DC} to 7.5 kV_{DC}



ORDERING INFORMATION, CERAMIC 2 kV _{DC}							
C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		ORDERING CODE
					AWG	INCH (mm)	
X7R							
100	± 10 %	0.330 (8.4)	0.190 (4.8)	0.250 (6.4)	20	0.032 (0.81)	564R20TST10
220			0.180 (4.6)				564R20TST22
330							564R20TST33
470			0.170 (4.3)				564R20TST47
560			0.185 (4.7)				564R20TST56
680			0.170 (4.3)				564R20TST68
1000		0.400 (10.2)	0.175 (4.4)				564R20TSD10
1500		0.430 (10.9)	0.160 (4.1)				564R20TSD15
1800		0.460 (11.7)	0.170 (4.3)				564R20TSD18
2200							564R20TSD22
2700							564R20TSD27
3300		0.530 (13.5)	0.160 (4.1)				564R20TSD33
3900		0.680 (17.3)	0.170 (4.3)				564R20TSD39
4700				0.375 (9.5)			564R20TSD47
Y5S							
1000	± 20 %	0.330 (8.4)	0.175 (4.4)	0.250 (6.4)	20	0.032 (0.81)	564R20TSSD10
1500		0.400 (10.2)	0.170 (4.3)				564R20TSSD15
1800		0.430 (10.9)					564R20TSSD18
2200		0.460 (11.7)					564R20TSSD22
2700		0.530 (13.5)					0.175 (4.4)
3300			564R20TSSD33				
3900			564R20TSSD39				
4700		0.620 (15.7)	0.170 (4.3)	564R20TSSD47			
5600		0.680 (17.3)		564R20TSSD56			
6800		0.720 (18.3)		564R20TSSD68			
Y5U							
1000	± 20 %	0.330 (8.4)	0.170 (4.3)	0.250 (6.4)	20	0.032 (0.81)	564R20GAD10
1500		0.330 (8.4)	0.170 (4.3)				564R20GAD15
Z5U							
1800	± 20 %	0.360 (9.1)	0.170 (4.3)	0.250 (6.4)	20	0.032 (0.81)	564R20GAD18
2200		0.400 (10.2)	0.175 (4.4)				564R20GAD22
2700		0.430 (10.9)					564R20GAD27
3300							564R20GAD33
3900							564R20GAD39
4700		0.490 (12.4)	0.170 (4.3)				564R20GAD47
6800				564R20GAD68			
0.010 μF		0.560 (14.2)	0.375 (9.5)	564R20GAS10			
		0.680 (17.3)					
Y5V							
0.010 μF	± 20 %	0.620 (15.7)	0.170 (4.3)	0.375 (9.5)	20	0.032 (0.81)	564R20GASS10
0.10 μF		0.950 (24.1)	0.240 (6.1)		22	0.025 (0.64)	565R20GAP10

TAPE AND REEL OPTIONS

- To specify tape and reel, add two letter suffix to the ordering code (for details of the packaging code see general section of the catalog)



564R and 565R Series

Lower Voltage Ceramic Disc Capacitors
2 kV_{DC} to 7.5 kV_{DC}

Vishay Cera-Mite

ORDERING INFORMATION, CERAMIC 3 kV _{DC}							
C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		ORDERING CODE
U2J (N750)							
10	± 20 %	0.330 (8.4)	0.210 (5.3)	0.250 (6.4)	20	0.032 (0.81)	564R30GAQ10
12			0.210 (5.3)				564R30GAQ12
15			0.180 (4.6)				564R30GAQ15
R3L (N2200)							
22	± 20 %	0.330 (8.4)	0.200 (5.1)	0.250 (6.4)	20	0.032 (0.81)	564R30GAQ22
27			0.190 (4.8)				564R30GAQ27
33			0.170 (4.3)				564R30GAQ33
X7R							
47	± 20 %	0.330 (8.4)	0.230 (5.8)	0.250 (6.4)	20	0.032 (0.81)	564R30GAQ47
56			0.190 (4.8)				564R30GAQ56
68			0.200 (5.1)				564R30GAQ68
100			0.180 (4.6)				564R30GAT10
150			0.190 (4.8)				564R30GAT15
220			0.175 (4.4)				564R30GAT22
270			0.180 (4.6)				564R30GAT27
330			0.175 (4.4)				564R30GAT33
390							564R30GAT39
470			0.180 (4.6)				564R30GAT47
680	± 10 %	0.400 (10.2)	0.180 (4.6)	0.375 (9.5)	20	0.032 (0.81)	564R30TST68
1000			0.175 (4.4)				564R30TSD10
1500		0.490 (12.5)	564R30TSD15				
1800		0.530 (13.5)	564R30TSD18				
2200			564R30TSD22				
2700		0.620 (15.7)	564R30TSD27				
3300			564R30TSD33				
3900		0.720 (18.3)	564R30TSD39				
4700			564R30TSD47				
6800		0.900 (22.9)	0.185 (4.7)				564R30TSD68
Y5S							
1000	± 20 %	0.400 (10.2)	0.190 (4.8)	0.250 (6.4)	20	0.032 (0.81)	564R30TSSD10
1500		0.460 (11.7)					564R30TSSD15
1800		0.490 (12.4)					564R30TSSD18
2200		0.530 (13.5)					564R30TSSD22
2700		0.560 (14.2)	0.185 (4.7)	564R30TSSD27			
3300		0.620 (15.7)		564R30TSSD33			
3900		0.680 (17.3)		564R30TSSD39			
4700		0.790 (20.0)		564R30TSSD47			
5600		0.900 (22.9)	0.190 (4.8)	564R30TSSD56			
6800			0.205 (5.2)	564R30TSSD68			
Y5U							
680	± 20 %	0.330 (8.4)	0.175 (4.4)	0.250 (6.4)	20	0.032 (0.81)	564R30GAT68
Z5U							
1000	± 20 %	0.330 (8.4)	0.195 (5.0)	0.250 (6.4)	20	0.032 (0.81)	564R30GAD10
1500		0.360 (9.1)	0.190 (4.8)				564R30GAD15
1800		0.400 (10.2)					564R30GAD18
2200		0.430 (10.9)					564R30GAD22
2700		0.460 (11.7)	0.200 (5.1)	564R30GAD27			
3300		0.490 (12.4)	0.185 (4.7)	564R30GAD33			
3900		0.530 (13.5)		564R30GAD39			
4700		0.620 (15.7)	0.195 (5.0)	564R30GAD47			
6800		0.680 (17.3)	0.185 (4.7)	564R30GAD68			
8200				564R30GAD82			
0.010 μF		0.790 (20.0)		0.265 (6.7)			564R30GAS10
0.020 μF		0.720 (18.3)					565R30GASS20
0.033 μF		0.900 (22.9)	0.240 (6.1)				565R30GASS33
Y5V							
0.010 μF	± 20 %	0.720 (18.3)	0.185 (4.7)	0.375 (9.5)	20	0.032 (0.81)	564R30GASS10

TAPE AND REEL OPTIONS

• To specify tape and reel, add two letter suffix to the ordering code (for details of the packaging code see general section of the catalog)



564R and 565R Series

Lower Voltage Ceramic Disc Capacitors
2 kV_{DC} to 7.5 kV_{DC}

Vishay Cera-Mite

ORDERING INFORMATION, CERAMIC 6 kV _{DC}							
C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		ORDERING CODE
C0G (NP0)							
10	± 20 %	0.400 (10.2)	0.220 (5.6)	0.375 (9.5)	20	0.032 (0.81)	564R60GAQ10
U2J (N750)							
22	± 20 %	0.460 (11.7)	0.240 (6.1)	0.375 (9.5)	20	0.032 (0.81)	564R60GAQ22
R3L (N2200)							
33	± 20 %	0.400 (10.2)	0.230 (5.8)	0.375 (9.5)	20	0.032 (0.81)	564R60GAQ33
47		0.460 (11.7)	0.205 (5.2)				564R60GAQ47
X5F							
100	± 20 %	0.400 (10.2)	0.240 (6.1)	0.375 (9.5)	20	0.032 (0.81)	564R60GAT10
220			0.265 (6.7)				564R60GAT22
X5S							
330	± 20 %	0.400 (10.2)	0.260 (6.6)	0.375 (9.5)	20	0.032 (0.81)	564R60GAT33
Y5U							
470	± 20 %	0.400 (10.2)	0.265 (6.7)	0.375 (9.5)	20	0.032 (0.81)	564R60GAT47
560			0.240 (6.1)				564R60GAT56
Z5U							
1000	± 20 %	0.400 (10.2)	0.270 (6.9)	0.375 (9.5)	20	0.032 (0.81)	564R60GAD10
1500		0.460 (11.7)	0.280 (7.1)				564R60GAD15
2200		0.530 (13.5)	0.240 (6.1)				564R60GAD22
3300		0.620 (15.7)	0.260 (6.6)				564R60GAD33
4700		0.790 (20.0)					564R60GAD47
0.010 μF		0.950 (24.1)	0.250 (6.4)				564R60GAS10

ORDERING INFORMATION, CERAMIC 7.5 kV _{DC}							
C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		ORDERING CODE
X5F							
100	± 20 %	0.530 (13.5)	0.310 (7.9)	0.500 (12.7)	20	0.032 (0.81)	564R75GAT10
470		0.620 (15.7)	0.270 (6.9)				564R75GAT47
Y5U							
1000	+ 80/- 20 %	0.620 (15.7)	0.320 (8.1)	0.500 (12.7)	20	0.032 (0.81)	564R75GAD10
Z5U							
2500	+ 80/- 20 %	0.620 (15.7)	0.280 (7.1)	0.500 (12.7)	20	0.032 (0.81)	564R75GAD25



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.