


Anzeigen/
indicators : 1xLED grün/green

LED leuchtet bei Netzkontakt/ : LED grün/
LED lights at mains contact LED green

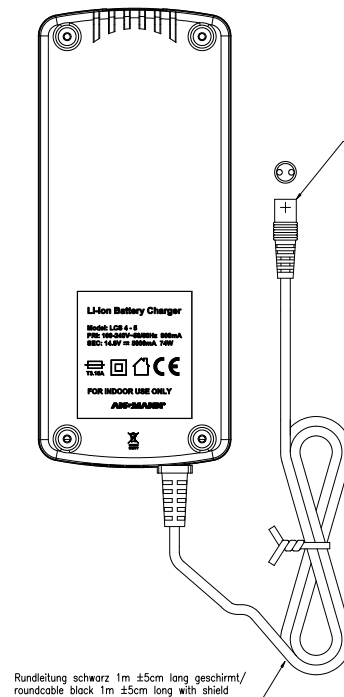

Umpolkupplung/
reverse polarity connector


M/scale 2:1

Li-Ion Battery Charger

Model: LCS 4 - 5
PRI: 100-240V~50/60Hz 900mA
SEC: 14.8V $\square$ 5000mA 74W



FOR INDOOR USE ONLY

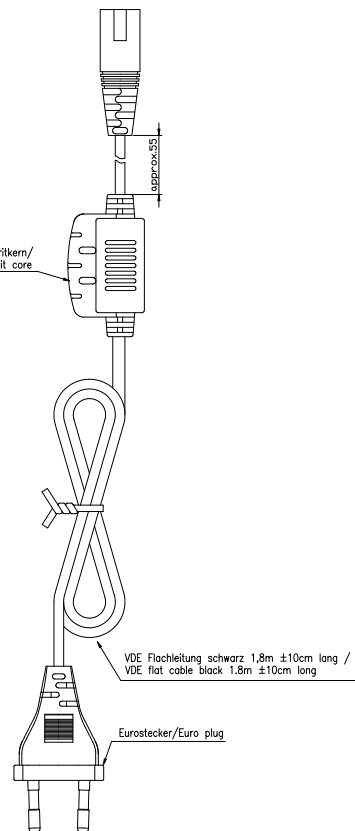ANS-MANN®

Ferritkern/
ferrit core

VDE Flachleitung schwarz 1,8m $\pm$ 10cm lang /
VDE flat cable black 1.8m $\pm$ 10cm long

Eurostecker/Euro plug

[illegible]