


BenQ MP620c

Native Resolution	XGA (1024 x 768)		
Projection System	DLP® by Texas Instruments Technology		
Brightness	2000ANSI lumens		
Lamp	200W, 3000/4000 hrs(Normal/Economic mode)		
Contrast Ratio (FOFO)	700:1		
Weight	5.9 lbs (2.67 kg)		
Noise Level	28/24dB (Normal/Economic mode)		
Dimension (WxHxD)	10.9 x 3.7 x 8.6 inches (278 x 94 x 219.5 mm)		
Image Size	31" to 300"		
Projection Ratio	54"@2m (54"@6.6 feet)		
Throw Ratio	1.8 to 2.1:1		
Throw Distance	Min: 1.00m; Max: 10.00m		
Keystone Adjustment	Vertical +/- 20 degrees		
Zoom Ratio	Manual zoom, 1.15:1		
Lens Shift Range	NA		
Color Wheel	5 Segment, RGBWY, Speed: (2X,2X)		
Color	Full 16.7 million color palette		
Aspect Ratio	4:3/16:9 screen selectable		
Horizontal Frequency	31 ~ 82 kHz		
Vertical Scan Rate	48 ~ 85 Hz		
Projection Position	Front/Rear, Table/Ceiling		
Input Terminals	Analog RGB: D-sub 15 pin x 1		
	DVI-I		
	Component Video: D-sub 15 pin (Shared with Analog RGB connector)		
	S-Video: Mini Din 4 pin x 1		
	Composite Video: RCA x 1		
Output Terminals	PC audio: mini jack x 1"		
	Analog RGB: D-sub 15 pin x 1		
Computer Compatibility	VGA(640 x480) to SXGA(1280 x 1024)		
Speakers	2 Watt Speaker x 1		
Control Terminals	USB x1 Type mini B		
	RS232 serial control: mini din 8 pin x 1		
Video Compatibility	NTSC/PAL/SECAM		
Auto Switching Power Supply	100 to 240 VAC, 50 to 60 Hz		
Power Consumption	Max 285W		
On-Screen Display Language	Czech/Dutch/English/French/German/Italian/Japanese/Korean/Polish/		
	Portuguese/Russian/Simplified Chinese/Spanish/Swedish/Thai/Traditional Chinese/Turkish(17 languages)		
Preset Modes/ Application Modes	PC Input:		
	Dynamic Mode	Presentation Mode	
	Cinema Mode	sRGB Mode	Blackboard Mode
	A/V Input :		
	Dynamic Mode	Standard Mode	
Functions	Cinema Mode	Blackboard Mode	
	Presentation Timer	Power On/Off Tone	Panel Key Lock
	Resolution Reminder	9 sets of Picture Mode	""Q?"" Hot Key for FAQ
	Auto Adjustment	Freeze	Auto Source Detection
	Blank (ECO mode)	Quick Cooling	Auto Off
	Security Password	High Altitude Mode	Mute
	HDTV Compatible	Macintosh® Compatible	MyScreen (Optional)
	User's Manual	Quick Start Guide	Manual CD
	Remote Control	Power Cord	Video Cable
	VGA Cable	Soft Carry Case	Batteries For R/C
Accessories (Standard)	Universal Ceiling Mount		
	Spare Lamp Kit		
Accessories (Optional)	Presentation Plus		
	RS232 Cable(for MyScreen)		

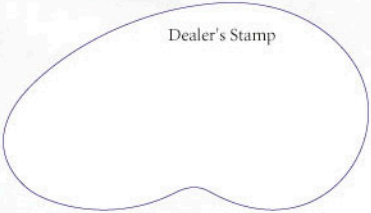

Headquarters

BenQ Corporation
Digital Media Business Group
157 Shan-Ying Rd., Gueshan
Taoyuan 333, Taiwan, R.O.C.
Tel : +886-3-359-5000
Fax : +886-3-359-9000

Latin America
8200 N.W. 33 Street,
Suite 301 West Side
Plaza III Miami, FL 33122
Tel : 1-305-4211200
Fax : 1-305-4211201

America
BenQ America Corp.
53 Discovery Irvine,
CA 92618, U.S.A
Tel: +1-949-255-9500
Fax: +1-949-255-9600

Asia Pacific
BenQ Asia Pacific Corp.
16 Jihu Road, Neihu,
Taipei 114, Taiwan, R.O.C.
Tel : +886-2-2799-8600
Fax : +886-2-2659-1959

Europe
BenQ Europe B.V.
Ekkersrijt 4130, 5692 DC Son,
The Netherlands
Tel: +31-499-750-500
Fax: +31-499-750-599

China
BenQ (IT)Co.,Ltd.
268 Shi-Shan Road,
Suzhou 215011, China
Tel: +86-512-6825-1233
Fax: +86-512-6825-1233-2299

BenQ Digital Projector MP620c



DLP® technology by Texas Instruments offers crystal clear images with superior quality.

