


BS EN60 320 - 2 - 2 (Standard Sheet E Class I) Non Rewirable

IEC MALE STRAIGHT




- Non Rewirable
- Various Cable Lengths
- Choice of Colours
- 10A, 250V a.c.

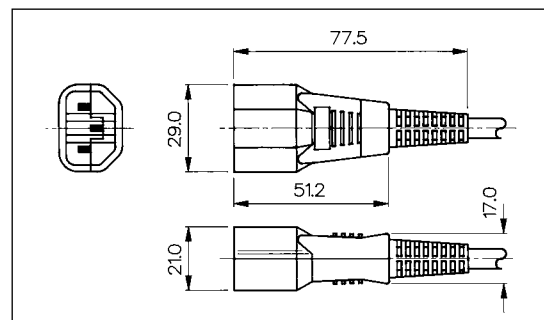

IEC MALE ANGLED



- Non Rewirable
- Various Cable Lengths
- Choice of Colours
- 10A, 250V a.c.

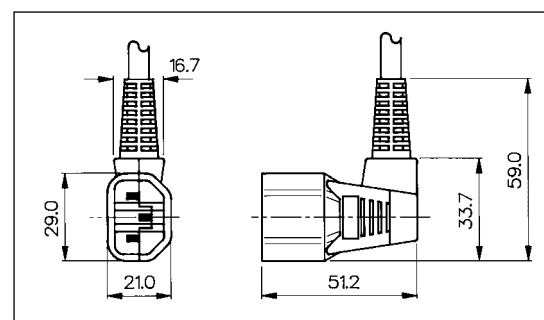

Ordering Data

Length	PZ0500	PZ0600
2 Metres	PZ0500/2M00	PZ0600/2M00
2.5 Metres	PZ0500/2M50	PZ0600/2M50
3 Metres	PZ0500/3M00	PZ0600/3M00

For grey or white versions add colour suffix /GY or /WH
e.g. PZ0500/2M50/GY = 2.5 metre length, colour grey

Specification	PZ0500/Length/Colour	PZ0600/Length/Colour
Cable Lengths (standard):	2m (/2M00), 2.5m (/2M50), 3m (/3M00)	2m (/2M00), 2.5m (/2M50), 3m (/3M00)
Cable type: 2m and under over 2m	0.75mm ² 1.00mm ²	0.75mm ² 1.00mm ²
Terminations:	Bared ends	Bared ends
Max. Rating:	10A, 250V a.c.	10A, 250v a.c.
Contact Resistance:	<10mΩ	<10mΩ
Insulation Resistance:	>10 ⁴ MΩ @ 500V d.c.	>10 ⁴ MΩ @ 500V d.c.
A.C. Breakdown:	Pole-Pole 6.5kV Poles-Accessible parts 6kV	Pole-Pole 6.5kV Poles-Accessible parts 6kV
Operating Temp. Range:	0°C to +70°C	0°C to +70°C
Withdrawal Force:	10N (Min.) 50N (Max.)	10N (Min.) 50N (Max.)
Mouldings:	Polycarbonate Flammability Rating UL 94V-0	Polycarbonate Flammability Rating UL 94V-0
Contacts:	Brass, Tin Plated	Brass, Tin Plated
Approvals:	⚡ (pending)	⚡ (pending)
Mates with:	PX0675, PX0695, PX0783, PX0793, PX0714	PX0675, PX0695, PX0783, PX0793, PX0714
Colours:	Black (blank), Grey (/GY), White (/WH)	Black (blank), Grey (/GY), White (/WH)
Variants:	For other lengths please contact the sales office	
RoHS	Compliant	Compliant