


# Type T912 and T914 Precision Resistor Networks

## Resistor Pairs and Quads with Ratio Characteristics for Precision Analog Circuits

Type T912 and T914 Precision Resistor Networks are constructed with Caddock Tetrinox® resistance films to achieve the precise ratio performance and stability required by highly accurate amplifier circuits, voltage reference circuits and precision bridge circuits.

- **Ratio Tolerance** - from 0.1% to 0.01%.
- **Ratio Temperature Coefficient** - 10 ppm/°C, 5 ppm/°C or 2 ppm/°C.
- **Absolute Temperature Coefficient** - 25 ppm/°C.
- **Ratio Stability of Resistance at Full Load for 2,000 hours** - within 0.01%.
- **Shelf Life Stability of Ratio for 6 Months** - within 0.005%.

Both the T912 and the T914 are available in 14 standard resistance values between 1,000 ohms and 1 Megohm. Caddock's high thru-put manufacturing capability assures that prototype and large-volume production quantities are available either from stock or within 6 weeks after receipt of order.

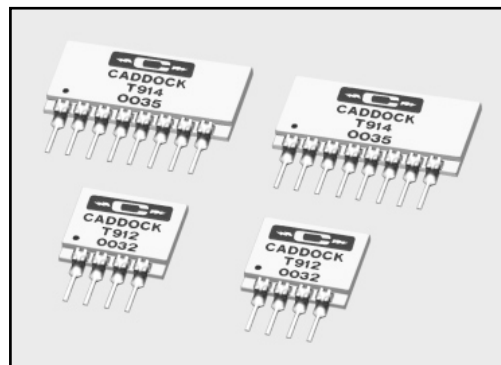


### Standard Type T912 and Type T914 Precision Resistor Networks

In addition to the 14 standard **equal value** models of the Type T912 and T914, the Type T912 can also be ordered with -

- **10:1 Resistance Ratio** - for use in amplifier gain-setting.
- **9:1 Resistance Ratio** - for use in voltage reference dividers.

Ordering Information:		T912 - A 10K - 010 - 02	
Model Number		Ratio Temperature Track (0°C to +70°C):*	
Ratio Code Letter: *		-10 = 10 ppm/°C    -05 = 5 ppm/°C -02 = 2 ppm/°C	
A - T912 with R <sub>1</sub> : R <sub>2</sub> where R <sub>2</sub> = 10R <sub>1</sub>		Ratio Tolerance: * -100 = 0.1%    -020 = 0.02% -050 = 0.05%    -010 = 0.01%	
1K:10K    10K:100K    40K:400K		Standard Resistance Values: * (R <sub>1</sub> )	
2K:20K    20K:200K    50K:500K			
5K:50K    25K:250K    100K:1 Meg			
B - T912 with R <sub>1</sub> : R <sub>2</sub> where R <sub>2</sub> = 9R <sub>1</sub>		1K    10K    40K    200K    500K	
1K:9K    10K:90K    40K:360K		2K    20K    50K    250K    1 Meg	
2K:18K    20K:180K    50K:450K		5K    25K    100K    400K	
5K:45K    25K:225K    100K:900K			
No Letter - T912 with R <sub>1</sub> = R <sub>2</sub>		Special or mixed resistance values are available as custom networks. See the custom section at the bottom of this page.	
No Letter - T914 with R <sub>1</sub> = R <sub>2</sub> = R <sub>3</sub> = R <sub>4</sub>			
		* (This information appears on the back side of the network)	

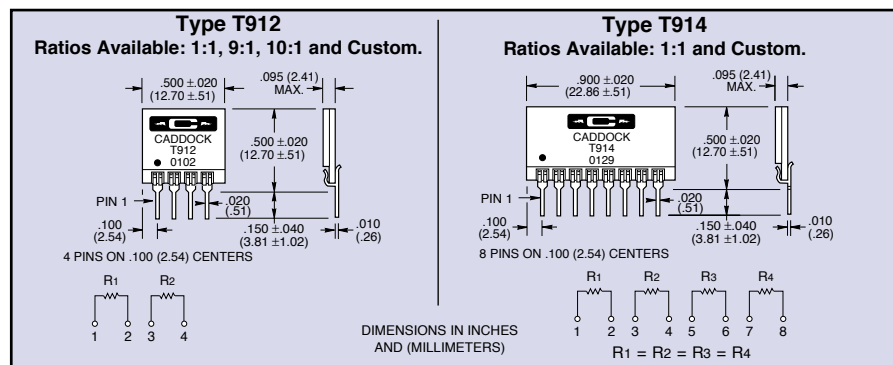

### Specifications:

**Absolute Tolerance:** ±0.1% for all resistors.

**Absolute Temperature Coefficient:** ±25 ppm/°C referenced to +25°C, ΔR taken at 0°C and +70°C.

**Voltage Rating:** 30 volts DC or RMS AC applied to R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub> and R<sub>4</sub>.

**Power Rating:** 0.10 watt applied to R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub> and R<sub>4</sub> (not to exceed rated voltage).

**Package Power Rating:** Type T912, 0.20 watt. Type T914, 0.40 watt.

**Storage Temperature:** -55°C to +105°C.

**Insulation Resistance Between Isolated Pins:** Pin 2 to Pin 3, Pin 4 to Pin 5, or Pin 6 to Pin 7, 1,000 Megohms, minimum.

**Dielectric Strength Between Isolated Pins:** 50 volts RMS AC.


**Ratio Stability Under Load:** Ratio change between any two resistors in the network under full load for 2,000 hours at +70°C, 0.01% maximum.

**Shelf Stability of Ratio:** Six months at shelf conditions, 50 ppm maximum.

### Custom Model T912 and T914 Precision Resistor Networks

For applications requiring non-standard resistance values, the T912 and T914 custom configurations can include these special features:

- Mixed resistance values with a maximum ratio of 250-to-1. (Example: 1.0 Megohm and 4 K)
- Absolute TC as low as 15 ppm/°C.
- Ratio TC as low as 2 ppm/°C.
- Custom voltage ratings.
- Matched resistors of any special value between 1 K and 2 Megohms.

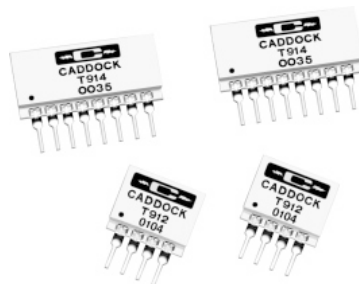

Call or write our Applications Engineering for performance, price and availability of these custom resistor networks.

**Applications Engineering**  
17271 North Umpqua Hwy.  
Roseburg, Oregon 97470-9422  
Phone: (541) 496-0700  
Fax: (541) 496-0408

**CADDOCK ELECTRONICS, INC.**  
e-mail: caddock@caddock.com • web: www.caddock.com  
For Caddock Distributors listed by country see caddock.com/contact/dist.html

**Sales and Corporate Office**  
1717 Chicago Avenue  
Riverside, California 92507-2364  
Phone: (951) 788-1700  
Fax: (951) 369-1151

**UK & Ireland  
Distributors**

**RHOPOINT  
COMPONENTS** Tel: +44 (0) 870 608 1188

Hurst Green • Surrey • RH8 9AX • UK  
Email • sales@rhopointcomponents.com  
Web • www.rhopointcomponents.com