

FUTEK MODEL LLB200 (L1610) SUBMINIATURE LOAD BUTTON LOAD CELL


Drawing Number: FI1051-B

INCH [mm] R.O.= Rated Output

WIRING CODE (WC1)

+Excitation	-Excitation	+Signal	-Signal
RED	BLACK	GREEN	WHITE

Shield
FLOATING

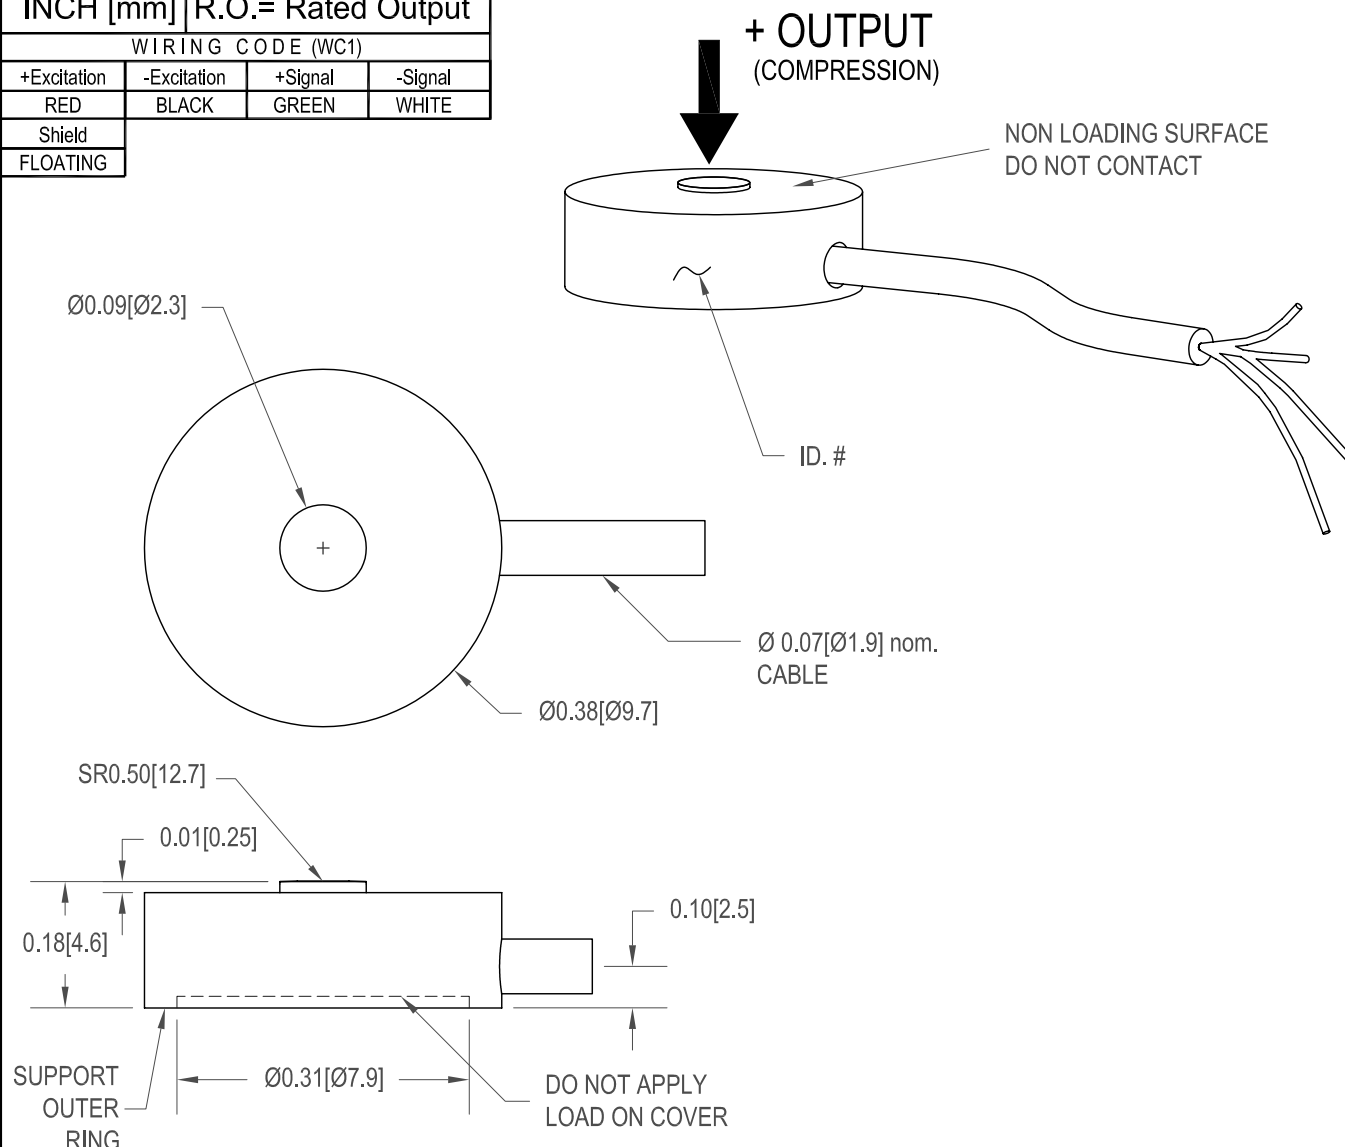

SPECIFICATIONS:

SAFE OVERLOAD	150% of R.O.
ZERO BALANCE	±3 % of R.O.
EXCITATION (VDC OR VAC)	7 MAX
BRIDGE RESISTANCE	350 Ω nom.
NONLINEARITY	±0.5% of R.O.
HYSTERESIS	±0.5% of R.O.
NONREPEATABILITY	±0.1% of R.O.
TEMP. SHIFT ZERO	±0.02% of R.O./°F [0.036% of R.O./°C]
TEMP. SHIFT SPAN	±0.02% of LOAD/°F [0.036% of LOAD/°C]
COMPENSATED TEMP.	60 to 160°F [15 to 72°C]
OPERATING TEMP.	-60 to 200°F [-50 to 93°C]
WEIGHT	1 oz [28 g]
MATERIAL	17-4 PH S.S.
DEFLECTION	0.002 [0.05] nom.

CABLE: #29 AWG, 4 Conductor, Spiral Shielded Silicone Cable 10 ft [3m] Long

ACCESSORIES AND RELATED INSTRUMENTS AVAILABLE

CALIBRATION (STD) 5 pt. COMPRESSION; 60.4 K Ω SHUNT CAL. VALUE

CALIBRATION TEST EXCITATION 5 VDC

STOCK NO:	CAPACITIES		RATED OUTPUT (nom.)
	lb	N	
FSH02612	10	44.5	1.5 mV/V
FSH02613	25	111	2 mV/V
FSH02614	50	222	

REFER TO LLB205 FOR BOTTOM CABLE EXIT VERSION

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from FUTEK

10 THOMAS
IRVINE, CA 92618 USA
1-800-23-FUTEK (38835)

INTERNET:
<http://www.futek.com>