




GV-560

Quick Start Guide


Version 1.0




Accessories

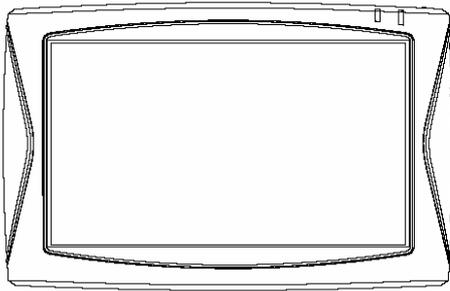


GV-560 Main Unit

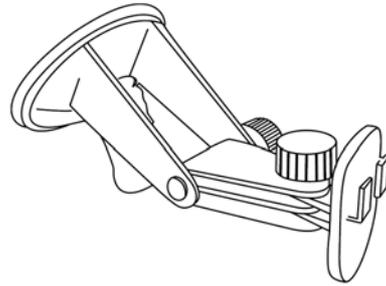


Mount




DC charger




AC adapter



Cradle

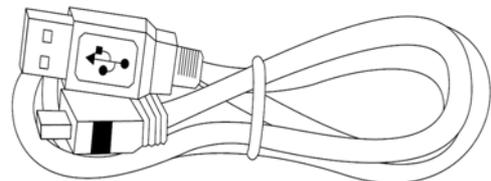

USB cable



DVD (user manual, driver, Application, map data...)




SD card (optional)

Note:


1. If any item is missing or damaged, please contact with your local retailer.
2. Fittings graphic presentation can to material object slightly the different, please by fittings not enclosed not real as the accurate.

Overview

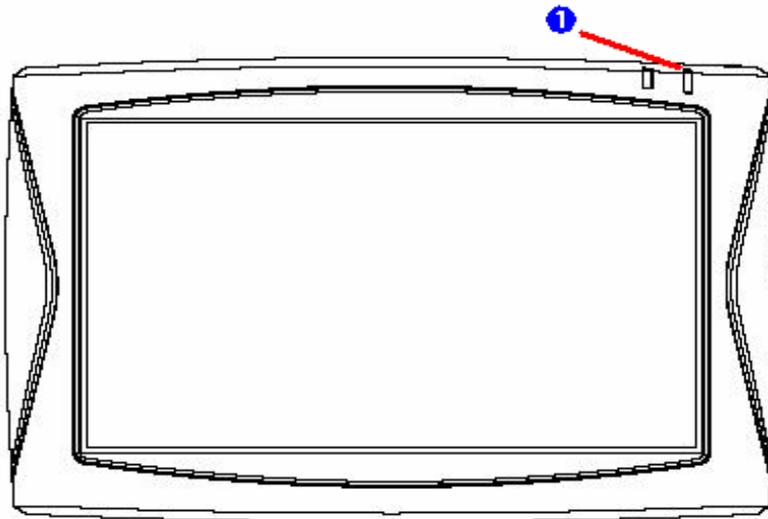


Front View

1 LED Indicator	Low Battery – Red Charging amber – Amber Fully charged – Green
------------------------	--

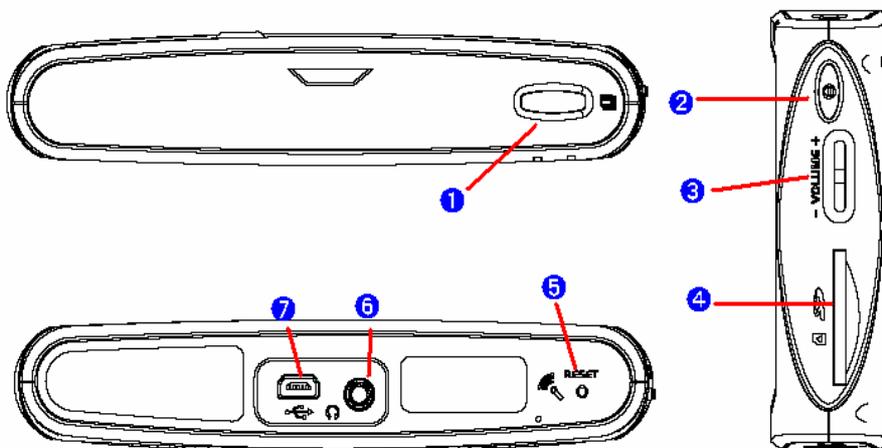

Top View, Side View, and Bottom View

1 Menu button	Press the Menu button to go back to Main menu.
2 Power button	Press the Power button to enter sleep mode.
3 Roll rock	Roll up or down to adjust the volume.
4 SD card slot	Plug in the SD card after installing the Navigation software, map data and applications provided.
5 Reset button	Press the reset button to reset the GV-560.
6 Earphone jack	Plug in your earphone or headset to the earphone jack if needed.
7 Mini USB port	Connect the GV-560 to PC via the USB cable for data transferring and battery charging.

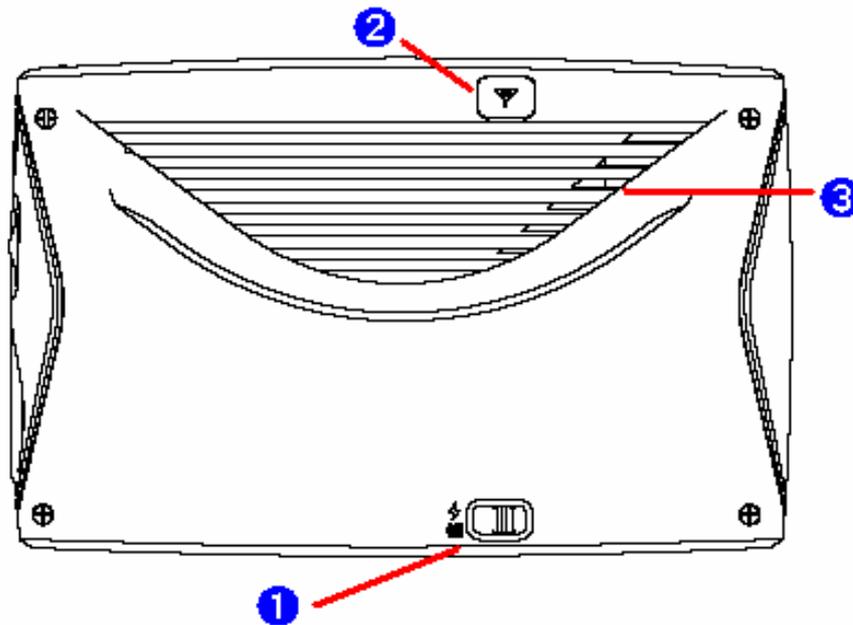


Rear View	
❶	Power Switch Switch the switch to "OFF" to turn off the GV-560 or to "ON" to turn on the GV-560. ⓘ The GV-560 will NOT be charged if the power switch is switched to "OFF".
❷	External Antenna Port Connect the external GPS antenna if needed. ⓘ The performance is guaranteed only by using GPS antenna provided by Globalsat.
❸	Speaker Audio output

Before you start to use the GV-560, please connect it with the AC adapter and plug to power socket for battery charging. When it is in charging, the status indicator will be **amber**. If the battery is fully charged, the status indicator will be lit on **green**.

Download Application Software to memory card by card reader

Insert the SD card into your card reader which is connected to your PC. Insert the DVD into the DVD-ROM; the installation program will automatically start. (If your autorun feature is disabled, please manually execute this program by double click the "**auto.exe**" from the root directory of DVD.) Click "**Make System Disk**" button for downloading the application and map into SD card.



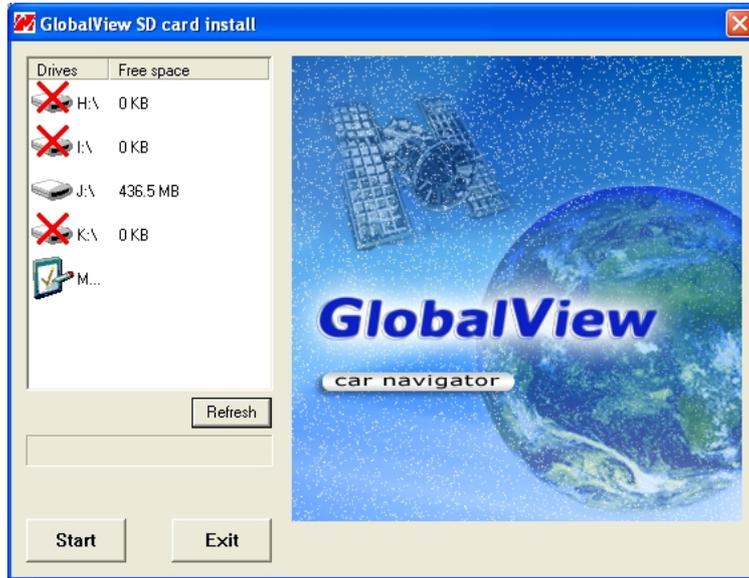

Click on the drive letter which your SD card is inserted, and click on “**Start**” button. After the download process is finished, please remove the SD card from card reader, insert it into your GV-560 and restart it.

Charging the GV-560



- ◆ You have 3 options to charge your GV-388: by AC adapter, Car charger or USB cable.

By AC adapter	Battery Slide Switch is “ON”	power is on	→ battery is being charged.
		power is off	→ battery is being charged.
By Car charger	Battery Slide Switch is “ON”	power is on	→ battery is being charged.
		power is off	→ battery is being charged.
By USB cable	Battery Slide Switch is “ON”	power is on	→ USB cable provides the power to GV-560.
		power is off	→ battery is being charged.

Attach GV-560 to Car Holder



1. Place the GV-560 at a downward angle into the base of the cradle.
 2. Push the top of GV-560 inward until the top clip locks into place.
 3. Clean windshield glass thoroughly with glass cleaner.
 4. Moisten suction cup and attach mount to the windshield.
 5. Lock mount lever by moving forward.
- To release, bring lever back and pull on the suction cup's clear tab to release suction. Never pull on mounting arm to remove from glass.
 - It is suggested that you attach the mount in the appropriate place in your car. Do not mount in front of an airbag panel, or block the driver's vision.



Main Screen



Tap on the **Navigation** icon to start the Navigation application.



Tap on the **Media** icon to enter the sub-screen which contains the music player and photo viewer.



Tap on the **Setup** icon to enter the sub-screen which you can do the settings of the device.



Tap on the date and time on top right corner of screen; it enters the date and time adjustment screen.



Tap this icon to do power management settings.




Battery capacity is 75%~100%.



Battery capacity is 50%~75%.



Battery capacity is 25%~50%.



Battery capacity is below 25%.



Battery is charging.

	<p>If your car windows equipped with Window Films for reducing heat and blocking the harmful UV rays, it may also slightly affect the receiving of GPS signal. Thus, the cold start time will take longer than usual.</p>
	<p>If the car is moving, it may also affect the time for GPS fix. We suggest that you stop the car while you turn on the GV-560 for a quicker GPS fix time.</p>
	<p>Please avoid excessive heat and humidity. Please do not leave the GV-560 in your car under the direct sunshine with windows closed. Place it in a high temperature environment may damage its LCD display or the device.</p>