

32 Button Attendant Console for the SPA962 IP Phone

PRODUCT DATA


Enrich IP Phone Functionality with the Push of a Button

The Linksys SPA932 32 Button Attendant Console for the SPA962 IP Phone is an ideal solution for small businesses wanting to simplify incoming call handling to quickly direct calls to the requested party and also monitor line status from a central location.

The SPA932 easily attaches to the SPA962 IP Phone providing 32 programmable speed-dial or direct station select (DSS) buttons, each button illuminating the line's status (idle, ringing, busy, or null) via the Busy Lamp Field (BLF). Incoming calls received can be immediately transferred to the proper location with only the push of a button assigned to the extension on the SPA932.

The modular design of the SPA932 permits up to two attendant consoles to be deployed for a total of 64 additional buttons offering an affordable solution that expands with the growth of your voice network. Installation and setup is just a matter of connecting the supplied bracket and cable to the SPA962 through which the SPA932 also utilizes the phone's power supply --no additional power source is required.

Based on the SIP standard, the SPA932 has been tested to ensure comprehensive interoperability with equipment from VoIP infrastructure leaders enabling service providers to offer competitive, feature rich services to their customers.

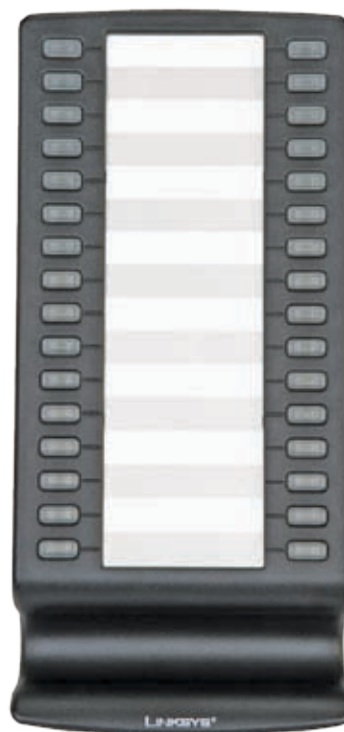

Easy to install and designed exclusively for the SPA962 IP Phone

32 programmable buttons simplify dialing and call transfers

Multi-colored LEDs monitor the status of each configured voice line via Busy Lamp Field (BLF)

Linking two Attendant Consoles supported for a total of 64 buttons

Features

- 32 Programmable Multi-color LED Buttons
- Illuminated line status monitoring (Green, idle; Red, in-use; Blinking Red, ringing; Orange, registration error)
- Call Transfer
- Speed Dial
- DSS - Direct Station Select
- BLF - Busy Lamp Field
- One-touch transfer functionality

Package Contents

- 32 Button Attendant Console
- Attachment Arm
- Two (2) Attachment Arm Screws
- Auxiliary Cable
- Desktop Stand
- Quick Installation Guide

Minimum Requirements

- Linksys SPA962 IP Phone

Specifications

| | |
|----------------|---|
| Model | SPA932 |
| Ports | 2 Auxiliary Ports |
| Buttons | 32 |
| LEDs | Multi-Color: Green, Red, Orange |
| Documentation: | Quick Installation Guide SPA IP Phone User Guide SPA900 Series IP Phone Administration Guide Provisioning Guide - For Service Providers Only |

Environmental

| | |
|--------------------|---|
| Dimensions | 4 x 8.5 x 1.5" (102 x 216 x 38 mm) W x H x D |
| Weight | 2 lbs (0.9 kg) |
| Power | Provided by host SPA962 IP Phone |
| Certification | FCC, cUL, CE, Canadian ICES-003 |
| Operating Temp. | 41 to 113 °F (5 to 45 °C) |
| Storage Temp. | -13 to 185 °F (-25 to 85 °C) |
| Operating Humidity | 10 to 90% Non-condensing, operating and non-operating |
| Storage Humidity | 10 to 90% Non-condensing, operating and non-operating |



Linksys
A Division of Cisco Systems, Inc.
121 Theory
Irvine, CA 92617 USA

E-mail: sales@linksys
support@linksys

Web: <http://www.linksys.com>

Linksys products are available in more than 50 countries, supported by 12 Linksys Regional Offices throughout the world. For a complete list of local Linksys Sales and Technical Support contacts, visit our Worldwide Web Site at www.linksys.com

Specifications are subject to change without notice. Linksys is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries. Copyright © 2007 Cisco Systems, Inc. All rights reserved. Other brands and product names are trademarks or registered trademarks of their respective holders.