


# 3M MP8630/8640 Multimedia Projector Quick Setup Instructions

**Cable Connections:** Always turn power off when making any cable connections.

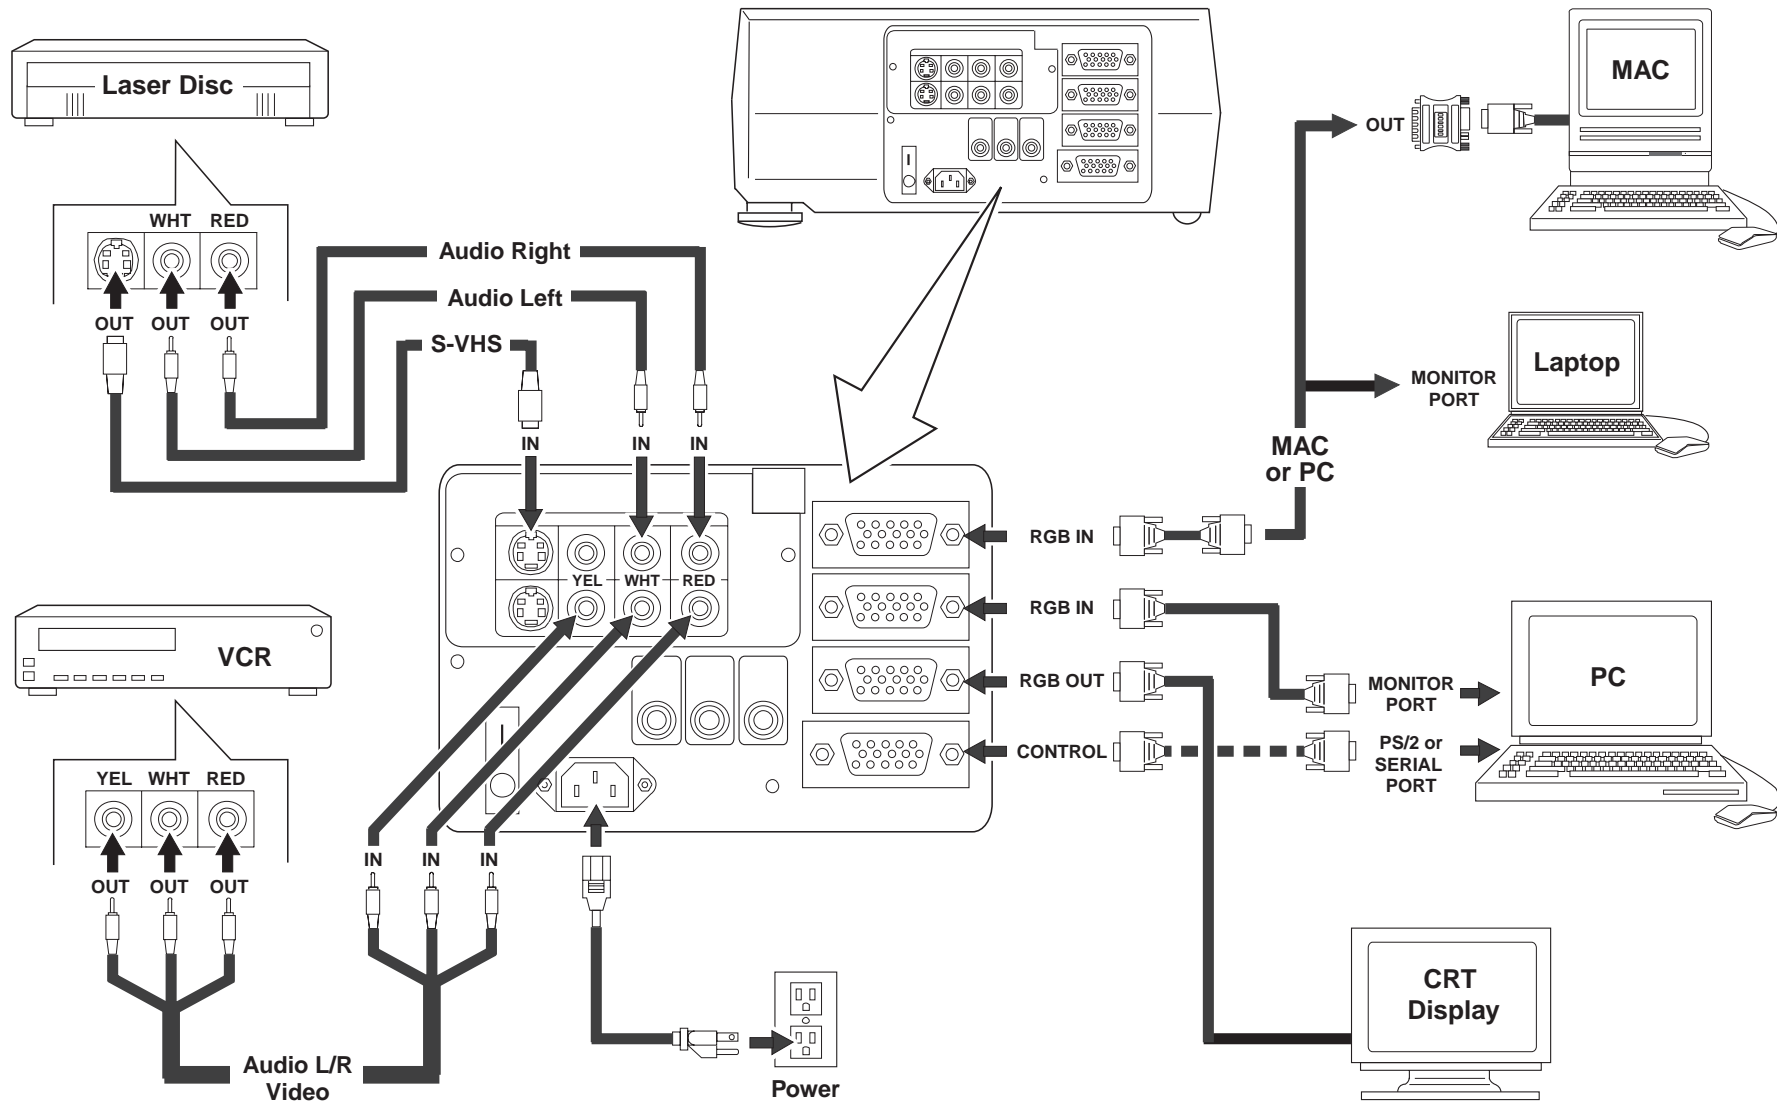


Technical Assistance & Product Information

**1-800-328-1371**

Internet: [scvsdeps@mmm.com](mailto:scvsdeps@mmm.com)

# 3M MP8630/8640 Multimedia Projector Quick Setup Instructions


## Projector Packout

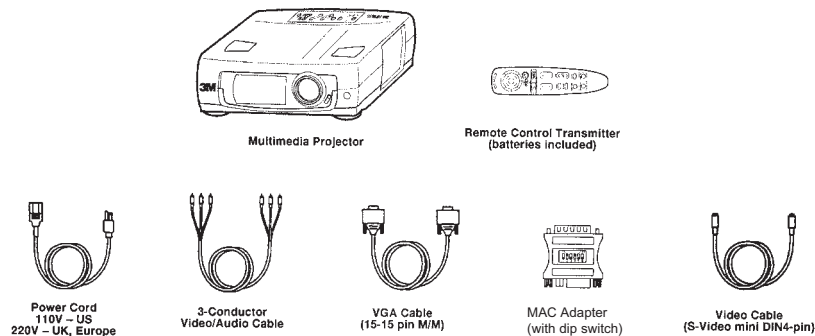


### Packout Items not shown:

- PS/2 mouse cable
- ADB mouse cable
- Serial mouse cable
- Stereo mini-jack

## Remote Control Transmitter

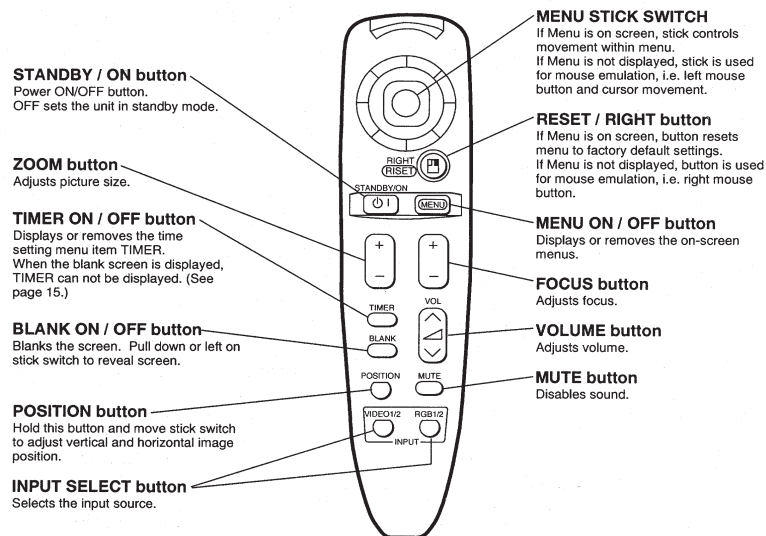

## Projector Controls

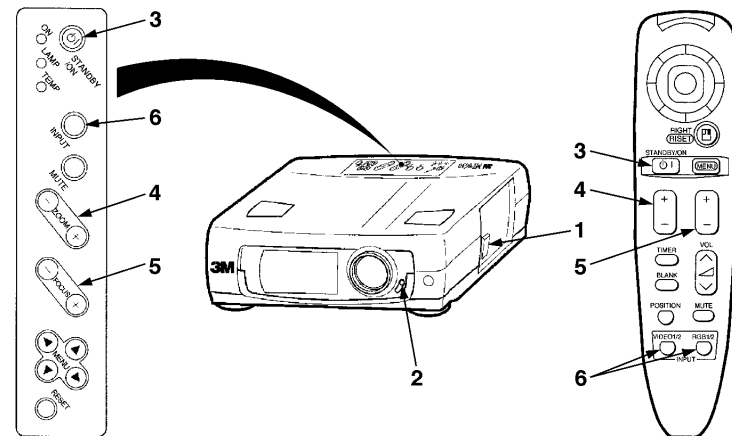

### Projector Start Up Procedure

1. With all power off, connect cables from projector to input devices.
2. Press the projector power switch (1) to the "ON" position.
3. Slide lens shutter (2) to the open position.
4. Press the STANDBY/On button (3).
5. Raise or lower front projector feet to adjust image height.
6. Press the ZOOM button (4) to adjust the image size to fit the screen.  
If needed, move projector closer or further from projection screen.
7. Press the FOCUS button (5) to adjust the image focus.
8. Turn on all connected equipment.
9. Press the INPUT button (6) on projector or INPUT SELECT-Video or RGB (6) on remote to select signal source.

### Projector Shutdown Procedure

1. Press and hold STANDBY/ON button (3) for 3-5 seconds.  
(The lamp turns off, the fan motor continues to run)

### Caution

Do not turn off the projector power before pressing the STANDBY/ON button. The fan motor will run for about 1 minute and cool the projector.

2. After fan stops, press main power switch (1) to "OFF".
3. Close the lens shutter (2) to protect lens.
4. Disconnect cables.