


3M MP8725/MP8635 Multimedia Projector Quick Setup Instructions

Cable Connections: Always turn power off when making any cable connections.

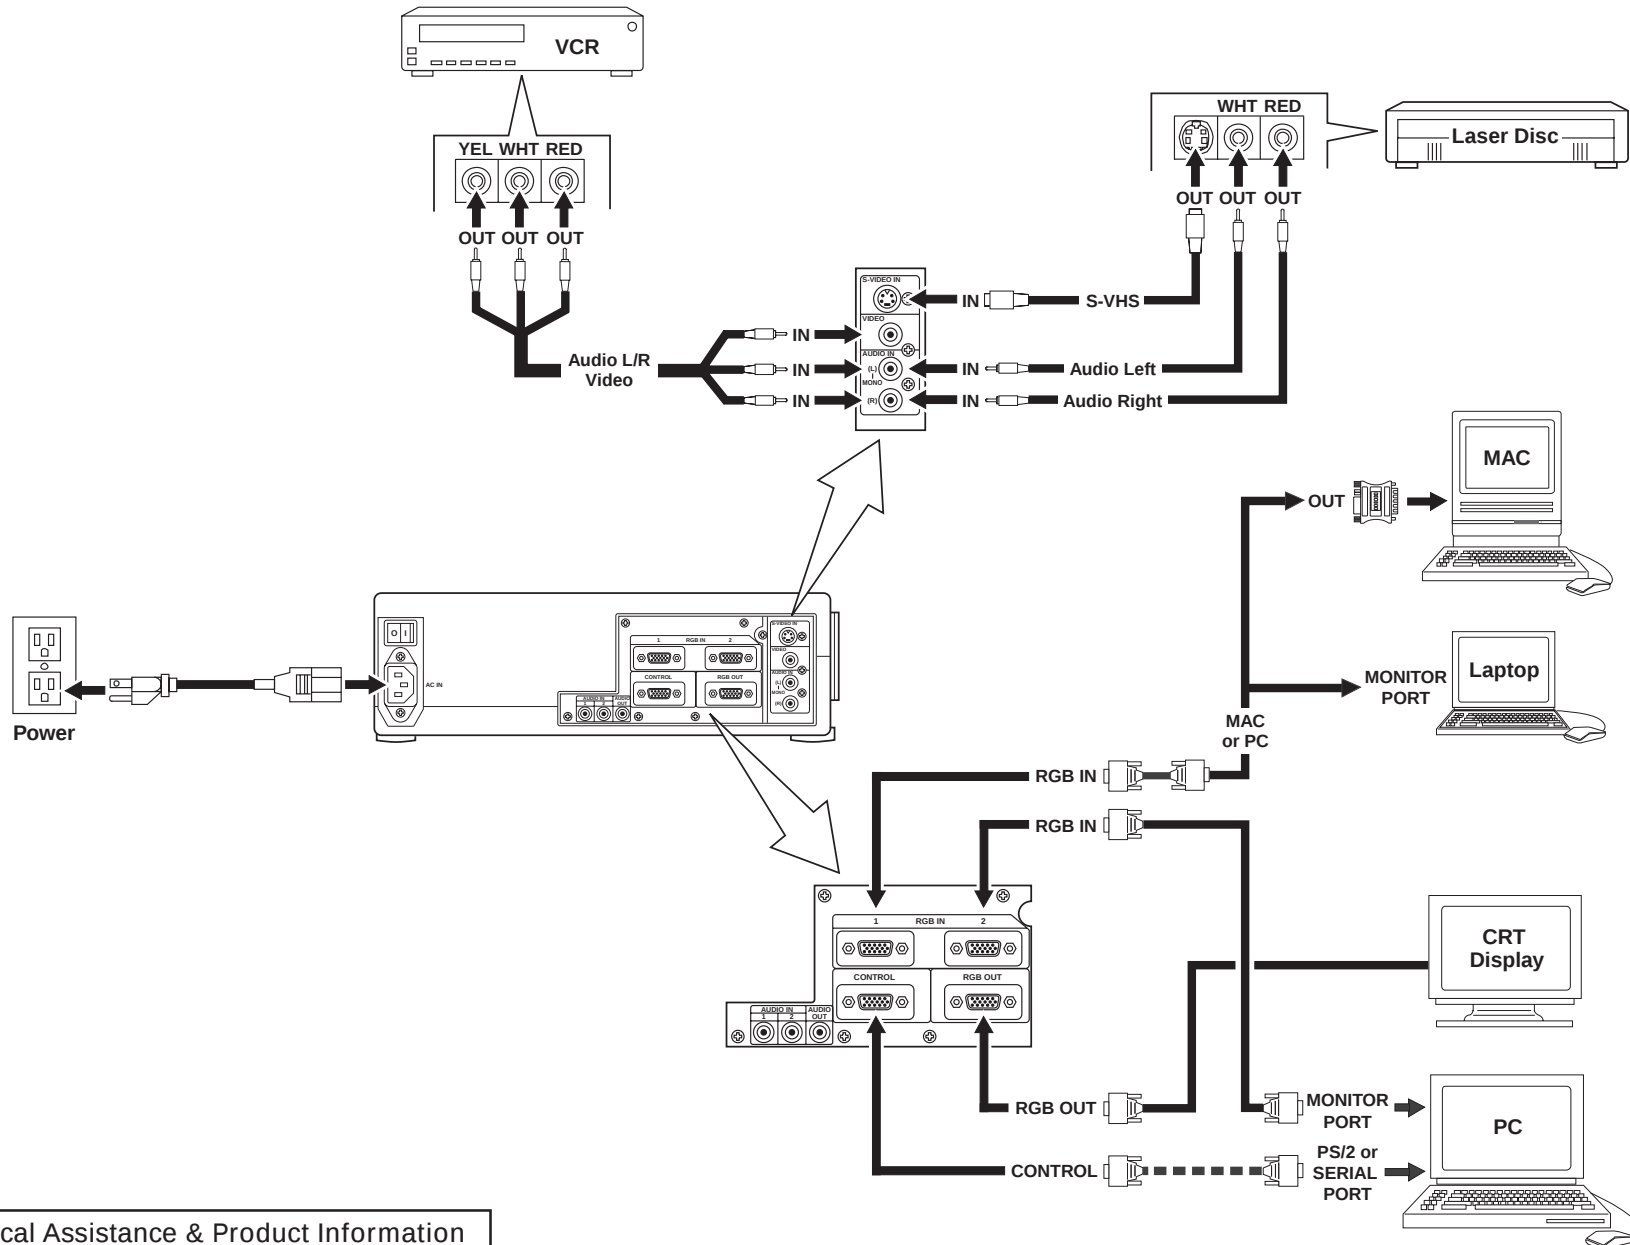


Technical Assistance & Product Information

1-800-328-1371

E-mail: techsupport@mmm.com

3M MP8725/MP8635 Multimedia Projector Quick Setup Instructions


Project Packout

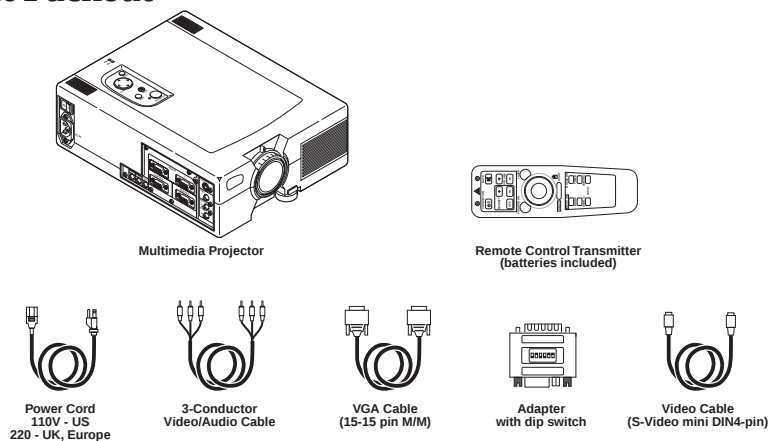


Packout Items Show Above:

- PS/2 mouse cable (1)
- ADB mouse cable (1)
- Serial mouse cable (1)
- Stereo mini-jack (1)

Remote Control Transmitter

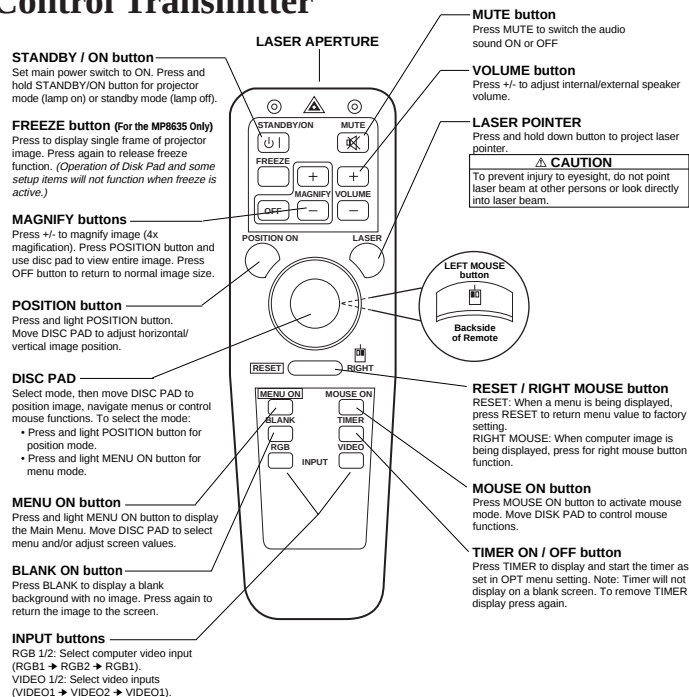

Projector Startup

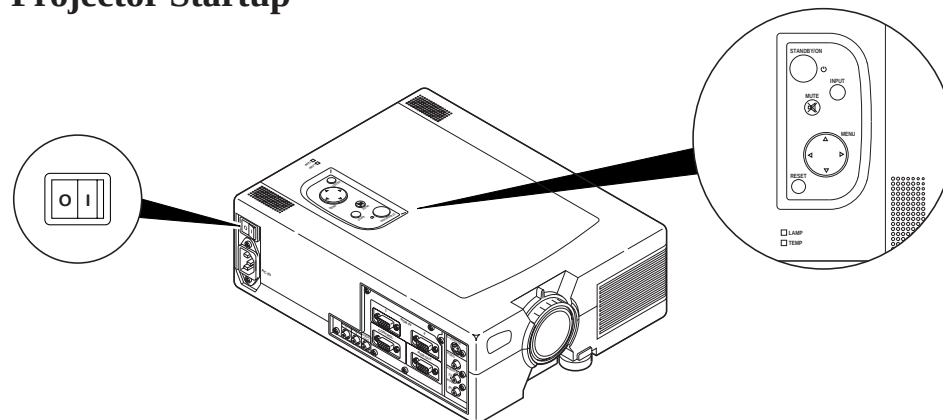

1. Make all cable connections and line hookups with the power off.
2. Turn the POWER SWITCH of the projector on. The ON indicator will light up orange.
3. Press the STANDBY/ON button . The ON indicator blinks (green) and then lights (green). The ON indicator will blink green during warm-up and lamp ignition. When power is turned off, there is a 60 second reset period before the STANDBY/ON button will function again.
4. Adjust the screen size by rotating the ZOOM CONTROL.
5. Adjust the focus by rotating the projection lens.
6. Turn on all connected equipment. See section 2.3 of the Operator's Guide.
7. Press the INPUT button on the projector or the INPUT SELECT (VIDEO or RGB) button on the remote to select the source of the signal to be projected on the screen. The selected signal input is displayed at the bottom right of the screen. The display will show the last selected input source before power was turned off.

Projector Shutdown Procedure

1. Hold the STANDBY/ON button for 3-5 seconds. The ON indicator blinks orange and the lamp turns off. After approximately 1 minute, the fan stops and the indicator stays orange.
2. Turn the MAIN POWER SWITCH of the projector off.

Caution

Do not turn off the POWER SWITCH before pressing the STANDBY/ON button. After the STANDBY/ON button is pressed, the fan rotates for about 1 minute to cool the projector.

3. Disconnect cables.