


The New PHD – 4 Portable Helium Detector

WIDE RANGE, HIGH PERFORMANCE SYSTEM

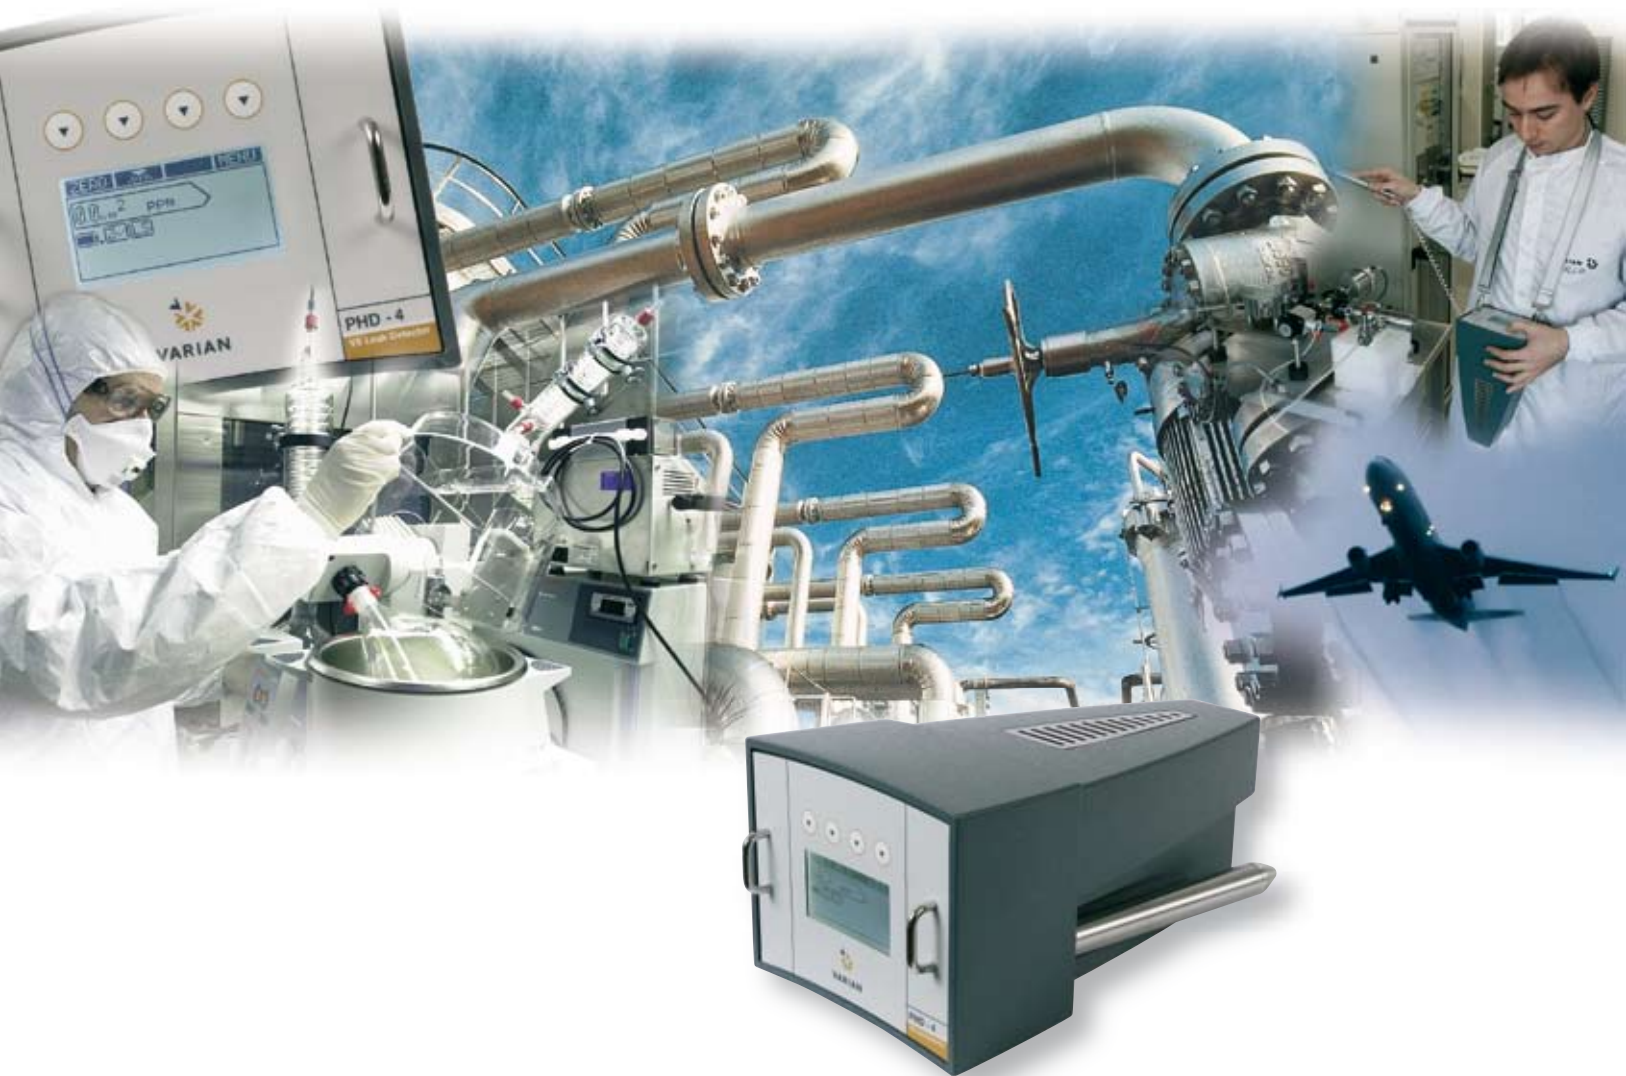

Inspiring Excellence

NOTICE: This document contains references to Varian. Please note that Varian, Inc. is now part of Agilent Technologies. For more information, go to www.agilent.com/chem.

VARIAN, INC.

 **Agilent Technologies**

The Varian Advantage

Global Application Support

Expertise When & Where You Need It

- Thousands of portable SIPD sniffing helium detectors are in daily use worldwide
- Helium testing provides proven application solution to a broad range of industries
- Native language application specialists available locally



***Maximizing
Productivity
and Uptime***

High Performance Instruments

Wide Range, PHD-4 Portable Helium Detector

- High Sensitivity to Helium
- Easy to Use
- Truly Portable
- Versatile
- Dependable



Industry Leading Service & Support

Get The Most From Your Investment

- The system is designed to allow easy replacement of sampling line components in the field
- Exchange units are available for rapid field replacement
- Support programs can be tailored to meet your most demanding needs



VARIAN

Features and Benefits



High Sensitivity to Helium - Can detect very small leaks

- High Sensitivity (2 ppm) to helium, three orders of magnitude better than industry standard, due to SIPD (proprietary and patented Selective Ion Pump Detection)
- Excellent selectivity for helium allows you to read helium leaks and ignore all other gases
- Helium sensitivity can be adjusted as required to minimize test costs and helium consumption
- Autozero function allows leak detection even in high helium background environment



Easy to Use - No training required

- State-of-the-art microprocessor control allows great simplicity of operation
- Fully automatic start up
- Ready for test in less than 3 minutes
- Intuitive touch screen display
- Visual and audio indicators (standard headphone connection)
- No tuning required




Truly Portable - Compact and light

- The PHD-4 weighs only 2,6 Kg (5.7 lbs) including the battery
- Its compact size allows it to be easily carried anywhere
- Its ergonomic design allows comfortable use for extended periods



Versatile - Suitable for many different applications

- Wide range of uses: replaces or can be used with existing methods such as bubble test or pressure decay
- Able to detect both very small and large leaks
- Can operate either on battery power or connected to an outlet
- Displayed messages can be viewed in several languages (English, French, German, Italian).
- Standard Analog and RS232 Serial output




Dependable - Long term operation

- Automatic backflow valve prevents helium saturation, ensuring fast response times as well as long life of sensing element.
- CE, CSA/US approved for global standardization.

The New PHD – 4 Portable Helium Detector

Outline Drawing

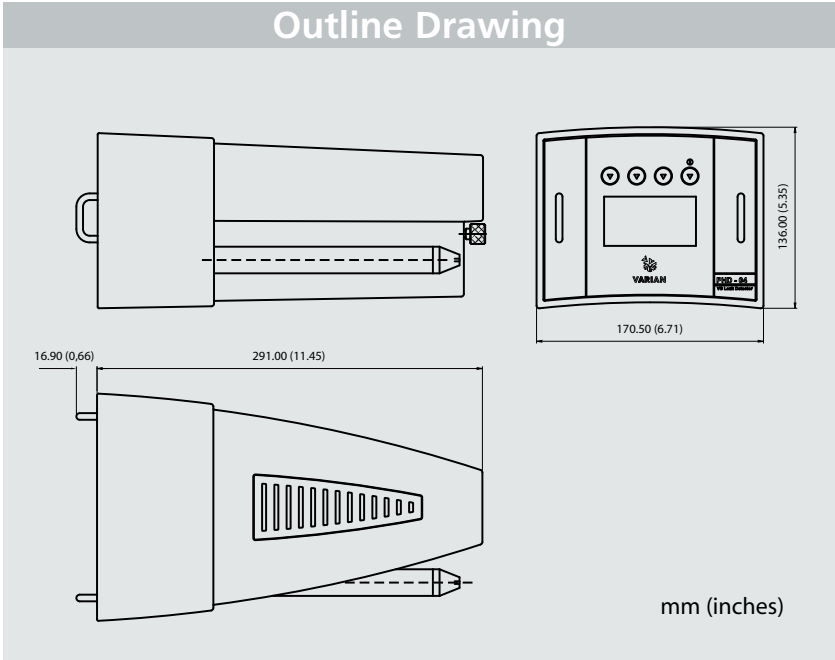

Technical Specifications

Lowest Detectable Helium Concentration: 2 ppm (parts per million)	
Lowest Detectable Helium leak:	5 x 10 ⁻⁶ mbar l/s
	5 x 10 ⁻⁶ atm cc/s
	5 x 10 ⁻⁷ Pa m ³ /s
Response Time:	< 2 sec
Recovery Time:	<10 sec (from 50 ppm to 0 ppm)
Start up time, including self check-up:	3 min approx.
Power Supply:	• 12 Vdc, 1.2 A
	Rechargeable Battery included
	• 110-240 V 50-60 Hz
	Transformer/Battery Charger included
Battery operation Time:	4 hours
Maximum Signal Drift:	10 ppm/10 min
Operating Conditions	Temperature: +5°C to +35°C
	Humidity: 90% maximum relative humidity
Storage Conditions	Temperature: -20°C to +60°C
Weight:	2,6 Kg (5.7 lbs)
Compliance to Norms:	CE approved
	CSA/US approved

Ordering Information

PHD-4 Complete Package	Part Number
Travel Case includes	9694640
<ul style="list-style-type: none">• PHD-4 Basic Unit• Spare Battery• Transformer/Battery Charger (110-240V)• Carrying Strap• Probe Set• 15-pin I/O connector• CD Instruction Manual	

PHD-4 Replacement Part Kit	Part Number
Includes	9694660
<ul style="list-style-type: none">• Sampling Pump with Fittings• Probe with Sampling Line• Tip Probe Filter• Internal Filter (Kit of 5 units)	

PHD-4 Basic Package	Part Number
Includes	9694600
<ul style="list-style-type: none">• PHD-4 Basic Unit• Transformer/Battery Charger (110-240V)• Carrying Strap• 15-pin I/O connector• CD Instruction Manual	

Accessories	Part Number
• Probe Set	9693515
• Capillary leak with refillable reservoir and gauge	9693540
• Probe with 10 meter (30') maximum Sampling Line	9693525
• Telescoping Extension Probe	9693520

Individual Replacement Parts	Part Number
• Spare Battery	SR 03.702609
• Transformer/Battery Charger (110-240V)	SR 03.702888
• Sampling Pump with Fittings	SR 03.702513
• Probe with Sampling Line	SR 03.702538
• Tip Probe Filter	SR 28.900012-01
• Internal Filter (Kit of 5 units)	SR 03.702959
• Carrying Strap	SR 03.702791
• 15-pin I/O connector	SR 03.702894
• Travel Case	SR 03.702890

Applications



Large Vessels and Bioreactors

The PHD-4 offers unmatched accuracy and repeatability, presenting a unique solution that it is cost effective and very well suited for the leak range specifications of this application.

Biotech and pharmaceutical industries used to rely on pressure decay and bubble test methods for finding leaks in their large bioreactors. The PHD-4 has established a new standard of quality, significantly increasing production yields.

- Fermenters
- Sterilizers
- Freeze Dryers



Underground Pipes and Storage Tanks

The portability and light weight of the PHD-4 plays a major role in this application. Underground pipes and storage tanks (UST) are slightly pressurized with helium which, due to its high mobility, can escape through small leaks and migrate to the surface, where it can be easily detected by the PHD-4.

The accuracy, portability and light weight of this unit greatly simplifies this process, particularly in difficult construction sites or rough terrain.

- Gas distribution lines
- Under and above ground containers and storage tanks
- Telecommunication and high voltage underground cables



Courtesy of Fraunhofer UMSICHT, Germany

Water Heating and Cooling Pipes

The PHD-4 allows leak location without interruption of the normal operation, by mixing helium with the water in the circuit. Until recently, the precise and rapid location of leaks in buried pipes has been very difficult.

In the event of a leak, helium desorbs from the fluid and diffuses to the surface, where it is easily detected. Leaks in pipeline systems such as district heating systems, drinking or chilled water systems and steam pipe networks incur high costs due to losses and corrosion damage.

- Heater exchangers and steam condensation lines
- Water pipes
- Radiant heating systems




Airplane Fuel Tanks and Lines

PHD-4 technology is approved worldwide by airplane manufacturers and operators as the standard for the location of leaks in aircraft fuel tanks and in oxygen distribution lines.

For this purpose, helium is injected from the outside into the tank to be checked and the helium probe is used inside the wings to locate any leaks.

- Fuel tanks
- Oxygen distribution lines

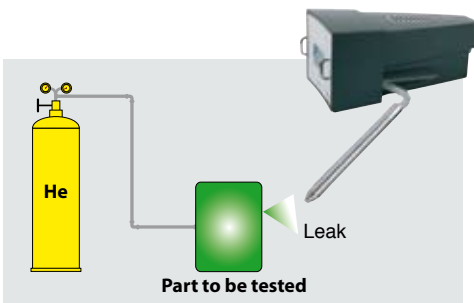

Other Applications

The PHD-4 is in daily use in many other applications. Virtually any object requiring any level of leak tightness can be simply tested with this instrument. Here is a partial list of other applications:

- Components and systems for the Chemical and Petrochemical Industries
- Components for the Automotive industry
- Process gas delivery lines in Semiconductor fabrication industry

The New PHD – 4 Portable Helium Detector

WIDE RANGE, HIGH PERFORMANCE SYSTEM

The PHD-4 is a portable compact leak detector which includes a battery for autonomous use in the field and uses helium as a tracer gas. It allows detection of very small leaks in objects where a slight helium pressure has been introduced.

PRINCIPLE OF OPERATION

The PHD-4 principle of operation is based on a Varian patented technology, Selective Ion Pump Detection (SIPD). The sensor incorporates a quartz capillary tube maintained under high vacuum by an ion pump. The quartz tube is heated with a platinum filament and becomes permeable to helium. As the partial pressure of helium in the ion pump increases, so does the current drawn by the ion pump, proportional to the pressure, indicating the helium concentration present in the test probe of the PHD-4.

WHY USE HELIUM AS A TRACER GAS?

Helium is a superior choice as tracer gas for a number of reasons:

- It is inert, non-toxic and non-flammable
- It can pass easily through leaks due to its small atomic size, allowing the detection of very small leaks
- It is present in the atmosphere at only 5 ppm, thus reducing the possibility of false readings
- It is highly mobile, allowing rapid desorption and short measurement times

Varian, Inc.

www.varianinc.com

Canada

Central coordination through:
Varian Vacuum Technologies
121 Hartwell Avenue
Lexington, MA 02421
USA
Tel: (781) 861 7200
Fax: (781) 860 5437
Toll Free # 1 (800) 882 7426

China

Varian Technologies - Beijing
Rm 1648 Central Tower South Wing
Beijing Junefield Plaza
No. 10 XuanWuMenWai Street
Beijing 100052
P.R. China
Tel: (86) 10 63108550
Fax: (86) 10 63100141
Toll Free: 800 820 6556

France and Benelux

Varian s.a.
7 avenue des Tropiques
Z.A. de Courtaboeuf - B.P. 12
Les Ulis cedex (Orsay) 91941
France
Tel: (33) 1 69 86 38 13
Fax: (33) 1 69 28 23 08
From Benelux Tel: (31) 118 67 15 70
From Benelux Fax: (31) 118 67 15 69

Germany and Austria

Varian Deutschland GmbH
Alsfelder Strasse 6
Postfach 11 14 35
64289 Darmstadt - Germany
Tel: (49) 6151 703 353
Fax: (49) 6151 703 302

India

Varian India PVT LTD
101-108, 1st Floor
1010 Competent House
7, Nangal Raya Business Centre
New Delhi 110 046 - India
Tel: (91) 11 28521171
Fax: (91) 11 28521173

Italy

Varian Vacuum Technologies
via F.lli Varian 54
10040 Leini, (Torino) - Italy
Tel: (39) 011 997 9 111
Fax: (39) 011 997 9 350

Japan

Varian Vacuum Technologies
Sumitomo Shibaura Building, 8th Floor
4-16-36 Shibaura
Minato-ku, Tokyo 108 - Japan
Tel: (81) 3 5232 1253
Fax: (81) 3 5232 1263
Toll Free: 0120 655 040

Korea

Varian Technologies Korea, Ltd
Shinsa 2nd Bldg. 2F
966-5 Daechei-dong
Kangnam-gu, Seoul - Korea 135-280
Tel: (82) 2 3452 2452
Fax: (82) 2 3452 2451
Toll Free: 080 222 2452

Mexico

Varian, S. de R.L. de C.V.
Concepcion Beistegui No 109
Col Del Valle
C.P. 03100 - Mexico, D.F.
Tel: (52) 5 523 9465
Fax: (52) 5 523 9472

Taiwan

Varian Technologies Asia Ltd.
14F-6, No.77, Hsin Tai Wu Rd., Sec. 1
Hsi chih, Taipei Hsien - Taiwan, R.O.C.
Tel: (886) 2 2698 9555
Fax: (886) 2 2698 9678
Toll Free: 0800 051342

UK and Ireland

Varian Ltd.
6 Mead Road
Oxford Industrial Park - Yarnton
Oxford OX5 1QU - England
Tel: (44) 1865 291570
Fax: (44) 1865 291571

United States

Varian Vacuum Technologies
121 Hartwell Avenue
Lexington, MA 02421 - USA
Tel: (781) 861 7200
Fax: (781) 860 5437

Other Countries

Varian Vacuum Technologies
via F.lli Varian 54
10040 Leini, (Torino) - Italy
Tel: (39) 011 997 9 111
Fax: (39) 011 997 9 350

Toll Free Number for North America 1 (800) 882 7426

Toll Free Number for Europe 00 800 234 234 00



VARIAN