

FEATURES

- Very Low Input Noise Voltage $3.5\text{nV}/\sqrt{\text{Hz}}$ Typ
- Wide Small-Signal Bandwidth 10MHz Typ
- High Current Drive Capability
(10V_{RMS} into 600Ω @ $V_S = \pm 18\text{V}$)
- High Slew Rate $13\text{V}/\mu\text{s}$ Typ
- Wide Power Bandwidth 200kHz Typ
- High Open-Loop Gain $200\text{V}/\text{mV}$ Typ
- Extended Industrial
Temperature Range -40°C to $+85^\circ\text{C}$
- Direct Replacement for Industry Standard 5534AN

APPLICATIONS

- High Quality Audio Amplifiers
- Telephone Channel Amplifiers
- Active Filter Designs
- Microphone Preamplifiers
- Audio Line Drivers
- Low-Level Signal Detection
- Servo Control Systems

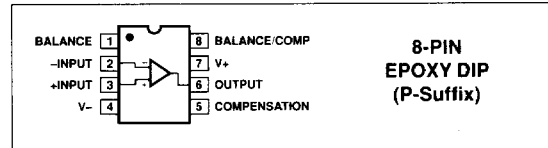
GENERAL DESCRIPTION

The SSM-2134 is a high performance low noise operational amplifier which offers exceptionally low voltage noise of $3.5\text{nV}/\sqrt{\text{Hz}}$, outstanding output drive capability, and very high small-signal and power bandwidth. This makes the SSM-2134 an ideal choice for use in high quality and professional audio equipment, instrumentation, and control circuits.


The SSM-2134 is internally compensated for $A_v \geq 3$. However, the frequency response can be optimized with an external compensation capacitor to enable the SSM-2134 to operate at unity-gain or drive large capacitive loads.

The SSM-2134 is offered in an 8-pin plastic DIP and its performance and characteristics are guaranteed over the extended industrial temperature range of -40°C to $+85^\circ\text{C}$.

PIN CONNECTIONS



SIMPLIFIED SCHEMATIC

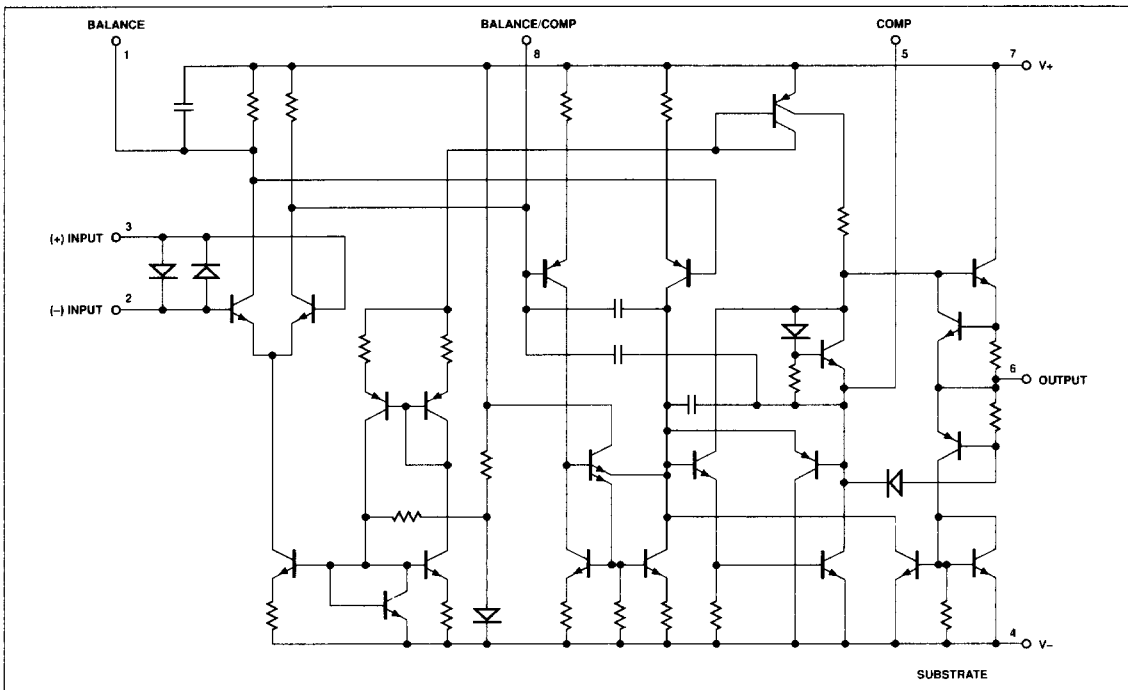

SSM-2134

ORDERING INFORMATION

PACKAGE	OPERATING TEMPERATURE RANGE
SSM2134P 8-Pin Plastic	-40°C to +85°C

ABSOLUTE MAXIMUM RATINGS

Supply Voltage	±22V
Differential Input Voltage (Note 1)	±0.5V
Input Voltage (Note 2)	±22V

Power Dissipation	300mW
Derate Above +24°C	2.5mW/°C
Short-Circuit Duration (Note 3)	Indefinite
Operating Temperature Range	-40°C to +85°C
Storage Temperature	-60°C to +150°C

NOTES:

- The SSM-2134's inputs are protected by diodes. Current limiting resistors are not used in order to achieve low noise. If differential input voltage exceeds ±0.6V, the input current should be limited to 10mA.
- For supply voltages less than ±22V, the absolute maximum input voltage is equal to the supply voltage.
- Output may be shorted to ground at $V_S = \pm 15V$, $T_A = +25^\circ C$. Temperature and/or supply voltages must be limited to ensure dissipation rating is not exceeded.




ELECTRICAL CHARACTERISTICS at $V_S = \pm 15V$ and $T_A = +25^\circ C$, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	SSM-2134P			UNITS
			MIN	TYP	MAX	
Input Offset Voltage	V_{OS}	$-40^\circ C \leq T_A \leq +85^\circ C$	—	0.3 0.4	2 3	mV
Input Offset Current	I_{OS}	$-40^\circ C \leq T_A \leq +85^\circ C$	—	15 25	300 400	nA
Input Bias Current	I_B	$-40^\circ C \leq T_A \leq +85^\circ C$	—	350 500	1500 2000	nA
Large-Signal Voltage Gain	A_{VO}	$R_L \geq 600\Omega$, $V_O = \pm 10V$	25	200	—	V/mV
		$R_L \geq 600\Omega$, $V_O = \pm 10V$ $-40^\circ C \leq T_A \leq +85^\circ C$	15	150	—	
Supply Current	I_{SV}	No Load	—	4.5	6.5	mA
Output Voltage Swing	V_O	$V_S = \pm 15V$, $R_L \geq 600\Omega$	±12	±13	—	V
		$V_S = \pm 18V$, $R_L \geq 600\Omega$	±15	±16	—	
Output Short-Circuit Current	I_{SC}	(Note 1)	—	65	—	mA
Input Resistance-Differential-Mode	R_{IN}	(Note 2)	30	100	—	kΩ
Input Voltage Range	IVR		±12	±13	—	V
Common-Mode Rejection	CMR	$V_{CM} = \pm 12V$	70	114	—	dB
Power Supply Rejection Ratio	PSRR		—	6	100	μV/V
Rise Time	t_r	$R_L \geq 600\Omega$, $C_C = 22pF$	—	20	—	ns
Overshoot	OS	$C_L = 100pF$	—	20	—	%
AC Gain		$C_C = 0$, $f_O = 10kHz$	—	6	—	V/mV
		$C_C = 22pF$, $f_O = 10kHz$	—	2.2	—	
Unity-Gain Bandwidth	GBW	$C_C = 22pF$, $C_L = 100 pF$	—	10	—	MHz
Slew Rate	SR	$C_C = 0$	—	13	—	V/μs
		$C_C = 22pF$	—	6	—	
Full Power Bandwidth	BW_P	$V_O = \pm 10V$, $C_C = 22pF$	—	95	—	kHz
		$C_C = 0$	—	200	—	
Input Noise Voltage Density	e_n	$f_O = 30Hz$	—	5.5	7.0	nV/√Hz
		$f_O = 1kHz$	—	3.5	4.5	
Input Noise Current Density	i_n	$f_O = 30Hz$	—	2.5	—	pA/√Hz
		$f_O = 1kHz$	—	0.6	—	
Broadband Noise Figure	F_N	$R_S = 5k\Omega$, $f = 10Hz$ to $20kHz$	—	0.7	—	dB
Total Harmonic Distortion	THD	$V_{IN} = 3V_{RMS}$, $A_V = +1000$, $R_L = 2k\Omega$	—	0.025	—	%

NOTES:





- Output may be shorted to ground at $V_S = \pm 15V$, $T_A = +25^\circ C$. Temperature and/or supply voltages must be limited to ensure dissipation rating is not exceeded.
- Guaranteed by design.

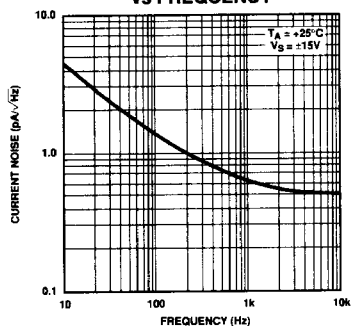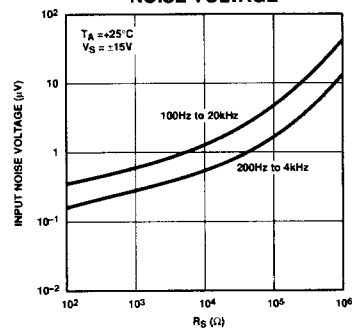Specifications subject to change. Consult latest data sheet.


TYPICAL PERFORMANCE CHARACTERISTICS *Continued*CURRENT NOISE DENSITY
vs FREQUENCYVOLTAGE NOISE DENSITY
vs FREQUENCYBROADBAND INPUT
NOISE VOLTAGE

2

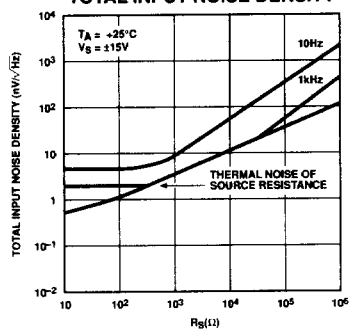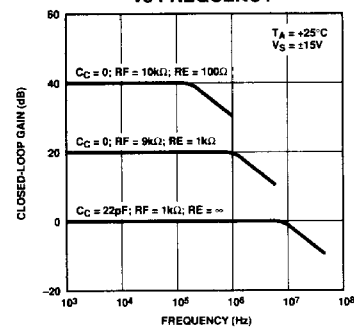
TOTAL INPUT NOISE DENSITY


OPEN-LOOP GAIN
vs FREQUENCYCLOSED-LOOP GAIN
vs FREQUENCYOUTPUT VOLTAGE SWING
vs FREQUENCY

CMR vs FREQUENCY




PSR vs FREQUENCY




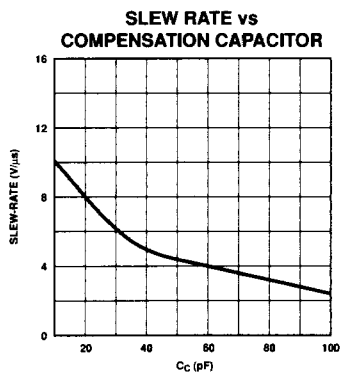


TOTAL HARMONIC DISTORTION vs FREQUENCY

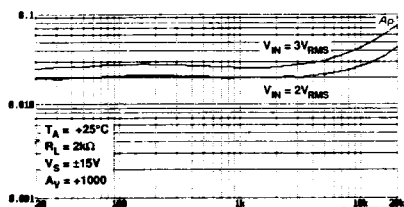


TOTAL HARMONIC DISTORTION vs FREQUENCY

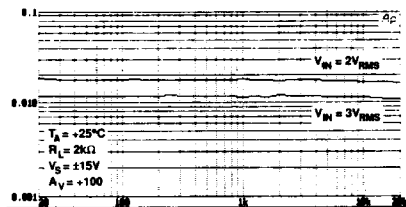

TOTAL HARMONIC DISTORTION vs FREQUENCY





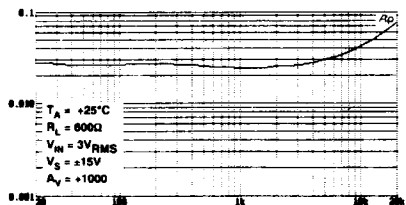


TOTAL HARMONIC DISTORTION vs FREQUENCY

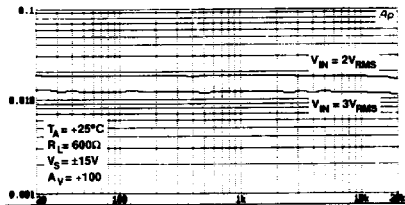


TYPICAL PERFORMANCE CHARACTERISTICS *Continued*




2

OUTPUT VOLTAGE SWING
vs LOAD RESISTANCEINPUT COMMON-MODE
VOLTAGE vs SUPPLY VOLTAGESUPPLY CURRENT
vs SUPPLY VOLTAGEINPUT OFFSET VOLTAGE
vs TEMPERATUREINPUT BIAS CURRENT
vs TEMPERATURE

CMR vs TEMPERATURE




PSR vs TEMPERATURE


SUPPLY CURRENT
vs TEMPERATURESHORT-CIRCUIT CURRENT
vs TEMPERATURE

APPLICATIONS INFORMATION

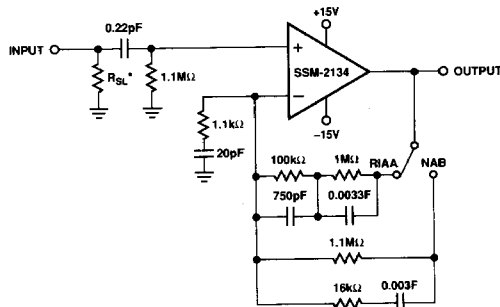
PREAMPLIFIER-RIAA/NAB COMPENSATION



*SELECT TO PROVIDE SPECIFIED TRANSDUCER LOADING
OUTPUT NOISE 0.8mV_{RMS} (WITH INPUT SHORTED)




BODE PLOT OF RIAA EQUALIZATION AND THE
RESPONSE REALIZED IN AN ACTUAL CIRCUIT
USING THE SSM-2134



BODE PLOT OF NAB EQUALIZATION AND THE
RESPONSE REALIZED IN THE ACTUAL CIRCUIT
USING THE SSM-2134

TEST CIRCUIT

FREQUENCY COMPENSATION
AND OFFSET VOLTAGE
ADJUSTMENT CIRCUIT



CLOSED-LOOP FREQUENCY RESPONSE

