

Low Voltage Lampholders


Bulbs will be supplied (dependant on order quantity)
if a voltage, 6/12/24V is specified.
These lampholders are not suitable for mains voltage.

Red, Amber, Green, Clear and Blue lenses available.


Brass bodies have polished chrome finish.



C1090FP ---



C1090FL ---

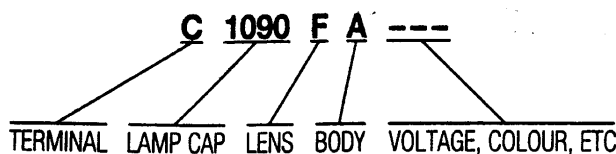

C



1090
E10(MES)



F
Flat



Panel Hole Dia. Body Material Dimension A
for E10 (MES)



A 19.0 Brass 35.0

D 19.0 Brass 30.2

E 19.0 Nylon 30.2

***P** 19.0 Nylon (+chrome trim) 30.2

G 19.0 Brass 24.6

H 19.0 Nylon 24.6

J 22.5 Brass 35.5

L 25.4 Brass 30.2

V
Domed



Panel Hole Dia. Body Material Dimension A
for B9 (MBC)


B 19.0 Brass 35.0

C 19.0 Nylon 35.0

***Q** 19.0 Nylon (+chrome trim) 35.0

K 22.5 Brass 41.8

M 25.4 Brass 41.8




6.3 x 0.8

1091
B9(MBC)

L
No lens



DIMENSIONS



F0445 MO
P.V.C. insulating terminal cover.



IP66 Sealing

Rubber washer for improving seal between bezel and panel and lens and bezel to give an IP66 rating is available on most versions.

All E10 and B9 types are suitable for panel thickness up to 6.2mm.

Some versions will accept panels up to 11.2mm thick.

*Note P and Q body codes denote a nylon body fitted with a chrome bezel trim -