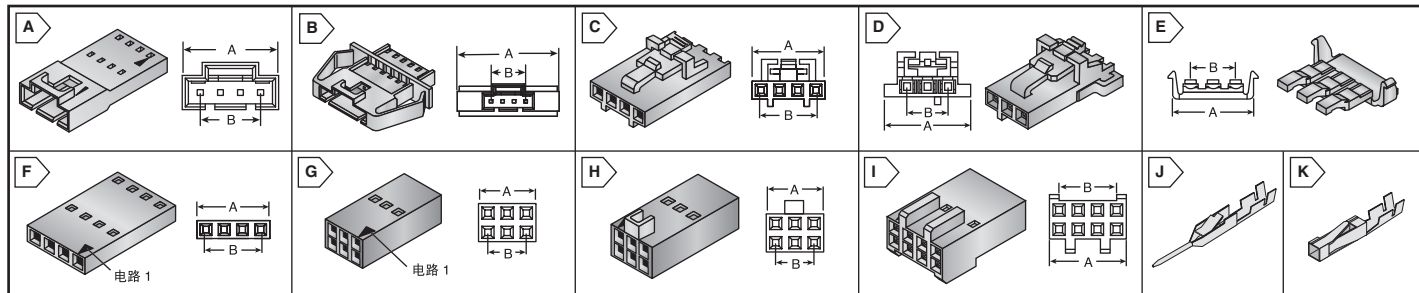


MOLEX 2.54mm / 0.100" SL™ 连接器

molex
one company a world of innovation

2.54mm (0.100") SL™ 线对线压接壳体

特性:

- 壳体: 黑色玻纤填充塑料, UL94V-0
- 用于插入 0.030" 到 0.090" 厚板的安装耳
- 锁紧罩式设计可固定正向闭锁到连接器
- 工作温度: -40 °C 至 +105 °C
- 根据 Molex 公司文档, 本品符合 RoHS 标准



LR19980 E29179

- 系列: 70107
- 极性

符合 RoHS 标准

欲订购 1000 只及以上, 请致电咨询。

贸泽库存编号	Molex 料号	图	线路数量	尺寸: in.		单价 (\$)				
				A	B	1	10	100	500	
单排, 无安装耳										
538-70107-0001	70107-0001	A	2	.280	.100	.95	.71	.55	.49	
538-70107-0002	70107-0002	A	3	.380	.200	.93	.75	.63	.48	
538-70107-0003	70107-0003	A	4	.480	.300	.97	.79	.65	.54	
538-70107-0004	70107-0004	A	5	.580	.400	1.08	.89	.71	.59	
538-70107-0005	70107-0005	A	6	.680	.500	1.45	1.16	.94	.78	
538-70107-0006	70107-0006	A	7	.780	.600	1.45	1.13	.94	.78	
538-70107-0007	70107-0007	A	8	.880	.700	1.56	1.03	.94	.78	
538-70107-0008	70107-0008	A	9	.980	.800	1.45	1.15	.91	.75	
538-70107-0011	70107-0011	A	12	1.280	1.100	1.71	1.40	1.08	.84	
538-70107-0013	70107-0013	A	14	1.480	1.300	1.56	1.36	1.06	.92	
单排, 安装耳										
538-70107-0036	70107-0036	B	2	.650	.100	1.13	.96	.88	.79	
538-70107-0037	70107-0037	B	3	.750	.200	.84	.75	.71	.68	
538-70107-0038	70107-0038	B	4	.850	.300	.99	.84	.76	.70	
538-70107-0039	70107-0039	B	5	.950	.400	.89	.75	.69	.62	
538-70107-0040	70107-0040	B	6	1.050	.500	1.68	1.51	1.36	1.23	

2.54mm (0.100") SL™ 压接壳体

- 壳体: 黑色玻纤填充塑料, UL 94V-0
- TPA: 白色玻纤填充塑料, UL94V-0
- 正向闭锁: 固定连接器到啮合连接器的锁紧罩
- TPA 零件: 在 TPA 锁紧罩就位时消除端子消隐
- 非极性: 端对端和侧对侧可堆叠
- 工作温度: -40 °C 至 105 °C



LR19980 E29179

- 70066 和 73838 系列
- 根据 Molex 公司文档, 本品符合 RoHS 标准

欲订购 1000 只及以上, 请致电咨询。

贸泽库存编号	Molex 料号	图	线路数量	尺寸: in.		单价 (\$)				
				A	B	1	10	100	500	
单排, 正向闭锁										
538-50-57-9402	50-57-9402	C	2	.199	.100	.44	.35	.28	.22	
538-50-57-9403	50-57-9403	C	3	.299	.200	.31	.24	.20	.16	
538-50-57-9404	50-57-9404	C	4	.399	.300	.43	.34	.28	.23	
538-50-57-9405	50-57-9405	C	5	.499	.400	.56	.44	.37	.29	
538-50-57-9406	50-57-9406	C	6	.599	.500	.63	.52	.43	.33	
538-50-57-9407	50-57-9407	C	7	.699	.600	.74	.60	.45	.35	
538-50-57-9408	50-57-9408	C	8	.799	.700	.80	.64	.53	.42	
538-50-57-9409	50-57-9409	C	9	.899	.800	.81	.64	.54	.41	
538-50-57-9410	50-57-9410	C	10	.999	.900	.82	.65	.54	.43	
538-50-57-9411	50-57-9411	C	11	1.099	1.000	.91	.72	.59	.48	
538-50-57-9412	50-57-9412	C	12	1.199	1.100	.75	.60	.50	.40	
538-50-57-9414	50-57-9414	C	14	1.399	1.300	.99	.85	.74	.64	
538-50-57-9416	50-57-9416	C	16	1.599	1.500	1.04	.93	.80	.70	
单排 TPA, 正向闭锁										
538-50-57-9702	50-57-9702	D	2	.197	.100	.35	.31	.29	.26	
538-50-57-9703	50-57-9703	D	3	.297	.200	.48	.41	.36	.32	
538-50-57-9704	50-57-9704	D	4	.397	.300	.45	.42	.39	.37	
538-50-57-9705	50-57-9705	D	5	.497	.400	.71	.64	.58	.52	
538-50-57-9706	50-57-9706	D	6	.597	.500	.56	.47	.42	.38	
538-50-57-9707	50-57-9707	D	7	.697	.600	.56	.48	.44	.41	
538-50-57-9708	50-57-9708	D	8	.797	.700	.59	.51	.45	.42	
TPA (端子定位组件) 零件										
538-73838-0002	73838-0002	E	2	.259	.100	.17	.15	.14	.13	
538-73838-0003	73838-0003	E	3	.359	.200	.19	.18	.17	.16	
538-73838-0004	73838-0004	E	4	.459	.300	.21	.20	.19	.18	
538-73838-0005	73838-0005	E	5	.559	.400	.22	.21	.20	.19	
538-73838-0006	73838-0006	E	6	.659	.500	.23	.22	.21	.20	
538-73838-0007	73838-0007	E	7	.759	.600	.26	.24	.22	.21	
538-73838-0008	73838-0008	E	8	.859	.700	.28	.27	.26	.25	
单排, 非极性										
538-50-57-9002	50-57-9002	F	2	.199	.100	.53	.47	.31	.24	
538-50-57-9003	50-57-9003	F	3	.299	.200	.67	.58	.38	.30	
538-50-57-9004	50-57-9004	F	4	.399	.300	.72	.62	.41	.33	
538-50-57-9005	50-57-9005	F	5	.499	.400	.73	.63	.42	.33	
538-50-57-9006	50-57-9006	F	6	.599	.500	.79	.68	.45	.36	
538-50-57-9007	50-57-9007	F	7	.699	.600	.85	.72	.49	.41	
538-50-57-9008	50-57-9008	F	8	.799	.700	.99	.78	.52	.41	
538-50-57-9009	50-57-9009	F	9	.899	.800	.90	.79	.52	.46	
538-50-57-9010	50-57-9010	F	10	.999	.900	.76	.71	.61	.49	

2.54mm (0.100") SL™ 压接壳体 (续)

特性:

- 壳体: 黑色玻纤填充塑料, UL94V-0
- 非极性: 端对端和侧对侧可堆叠
- 极化: 与双起磨有罩接头匹配
- 工作温度: -40 °C 至 +105 °C
- 70450 系列
- 根据 Molex 公司文档, 本品符合 RoHS 标准



LR19980 E29179

符合 RoHS 标准

欲订购 1000 只及以上, 请致电咨询。

贸泽库存编号	Molex 料号	图	线路数量	尺寸: in.		单价 (\$)				
				A	B	1	10	100	500	
双排, 非极性										
538-22-55-2041	22-55-2041	G	4	.199	.100	1.69	1.45	1.20	.99	
538-22-55-2061	22-55-2061	G	6	.299	.200	1.62	1.45	.99	.89	
538-22-55-2081	22-55-2081	G	8	.399	.300	2.00	1.80	1.20	.92	
538-22-55-2101	22-55-2101	G	10	.499	.400	2.24	2.05	1.36	1.10	
538-22-55-2121	22-55-2121	G	12	.599	.500	2.22	1.96	1.56	1.24	
538-22-55-2141	22-55-2141	G	14	.699	.600	2.69	2.40	1.59	1.29	
538-22-55-2161	22-55-2161	G	16	.699	.600	2.65	2.09	1.35	1.15	
538-22-55-2181	22-55-2181	G	18	.899	.800	2.00	1.65	1.49	1.40	
538-22-55-2201	22-55-2201	G	20	.999	.900	2.89	2.39	1.65	1.27	
538-22-55-2261	22-55-2261	G	26	1.299	1.200	2.77	2.45	2.09	1.82	
538-22-55-2301	22-55-2301	G	30	1.499	1.400	2.74	2.53	2.06	1.69	
538-22-55-2401	22-55-2401	G	40	1.999	1.900	3.99	3.55	2.41	1.90	
538-22-55-2501	22-55-2501	G	50	2.499	2.400	3.87	3.41	2.73	2.22	
双排, 极性, B 型										
538-22-55-2062	22-55-2062	H	6	.299	.200	1.88	1.52	1.21	.84	
538-22-55-2082	22-55-2082	H	8	.399	.300	1.88	1.52	1.21	.88	
538-22-55-2102	22-55-2102	H	10	.499	.400	1.29	1.05	.89	.76	
538-22-55-2122	22-55-2122	H	12	.599	.500	1.46	1.25	1.02	.792	
538-22-55-2142	22-55-2142	H	14	.699	.600	1.79	1.44	1.27	.97	
538-22-55-2162	22-55-2162	H	16	.799	.700	2.01	1.63	1.43	1.01	
双排, 极性, F 型										
538-22-56-6067	22-56-6067	I	6	.299	.200	2.45	2.10	1.58	1.30	
538-22-56-6087	22-56-6087	I	8	.399	.300	1.35	1.20	.95	.84	
538-22-56-6107	22-56-6107	I	10	.499	.400	2.49	2.13	1.60	1.31	
538-22-56-6127B	22-56-6127	I	12	.599	.500	1.37	1.17	1.06	.99	
538-22-56-6167	22-56-6167	I	16	.799	.700	1.57	1.29	1.17	1.04	
538-22-56-6187	22-56-6187	I	18	.899	.800	1.54	1.39	1.25	1.08	
538-22-56-6207	22-56-6207	I	20	.999	.900	3.15	2.70	2.03	1.67	
538-22-56-6307	22-56-6307	I	30	1.490	1.400	3.68	3.15	2.36	1.94	

压接端子

- 双接头线扣
- 锁紧尖端确保端子固定在壳体
- 磷铜
- 电压: 250V
- 电流: 3.0A

- 工作温度: -40 °C 至 +105 °C
- 公头, 配合 70107 系列使用
- 母头, 配合 70066 和 70450 系列使用
- 根据 Molex 公司文档, 本品符合 RoHS 标准



符合 RoHS 标准

* 强力

欲订购 2000 只及以上, 请致电咨询。

贸泽库存编号	Molex 料号	图	类型	AWG	电镀	单价 (\$)			
						1	100	500	1000
538-16-02-0117	16-02-0117	J	公头	22-24	30µ" 金	.18	.15	.12	.10