




LuxSpace/ LED筒灯

BBS488/489









Mounting instruction 安装说明




Type Number 产品型号		T° K	
BBS488	1×DLED	4000	1.054
BBS489		3000	

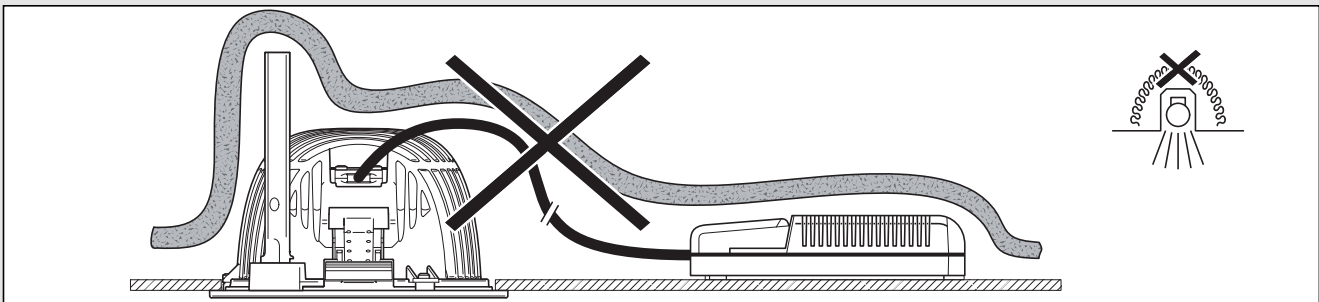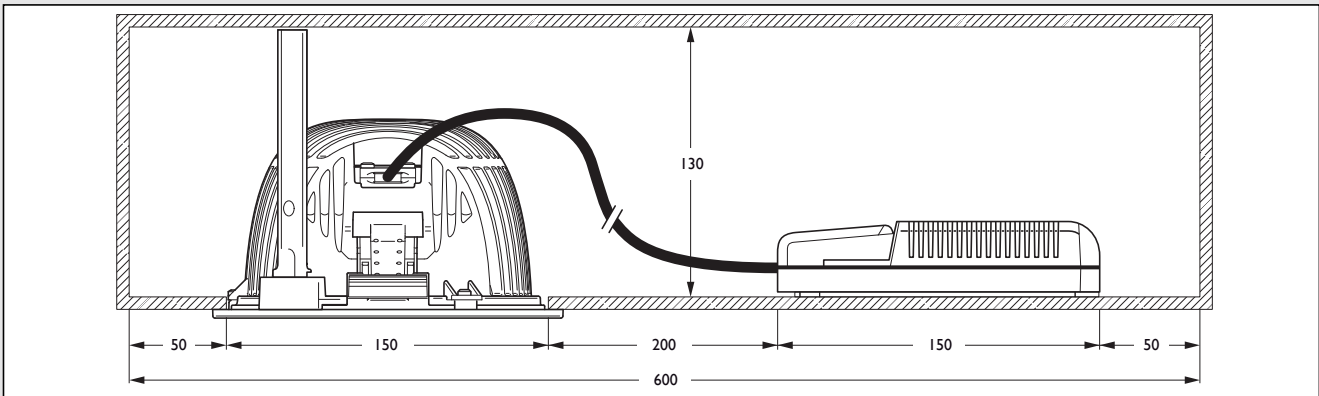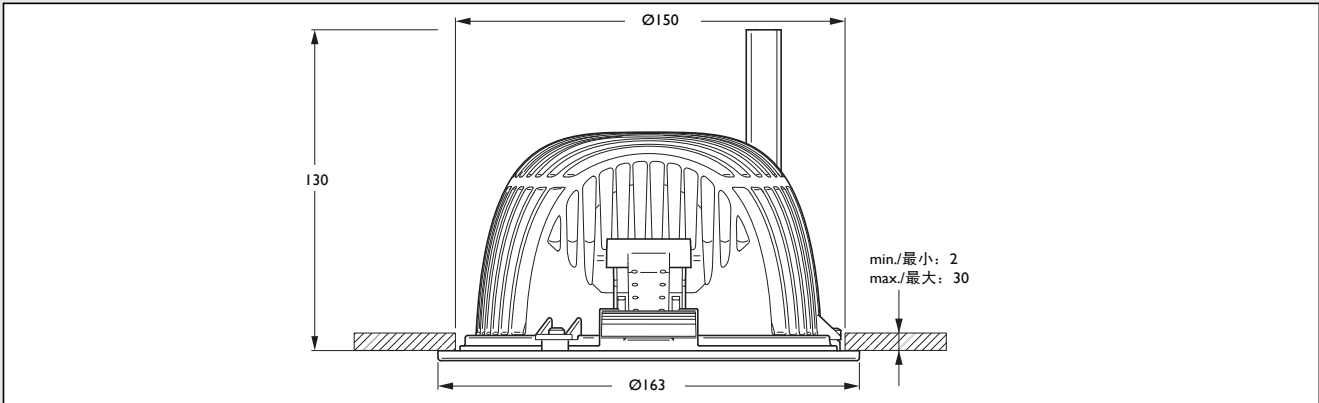


- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
灯具应由有资格的电工安装，接线要符合IEE电气标准或国家标准。
- The luminaire shall, under no circumstance, be covered with thermal insulation matting or similar material.
灯具不能被隔热或类似材料覆盖。
- Do not hot swap! LED heat sink module must not to be disconnected with line power on failure to do so may damage product.
请不要热拔插，LED散热模组不允许在带电的时候与电源线分开，这样会损毁产品。

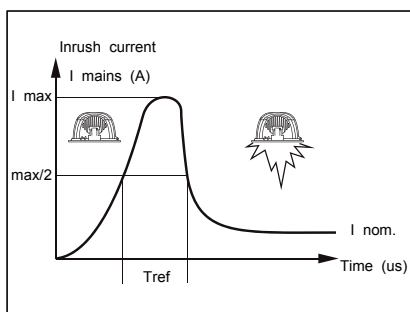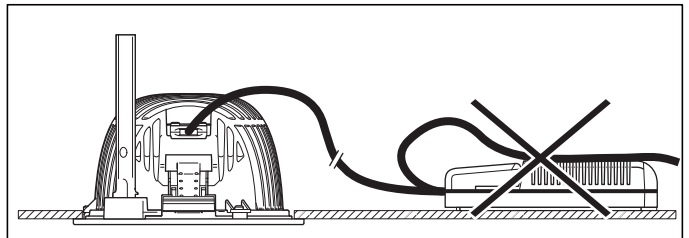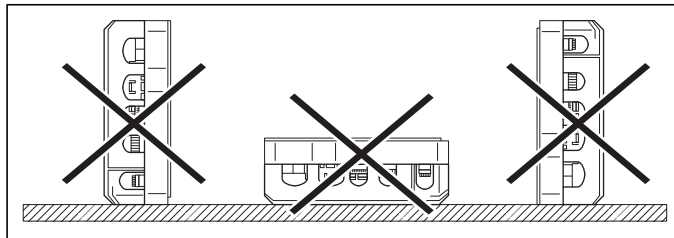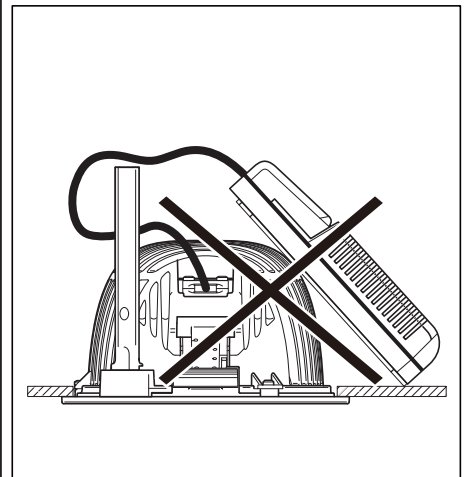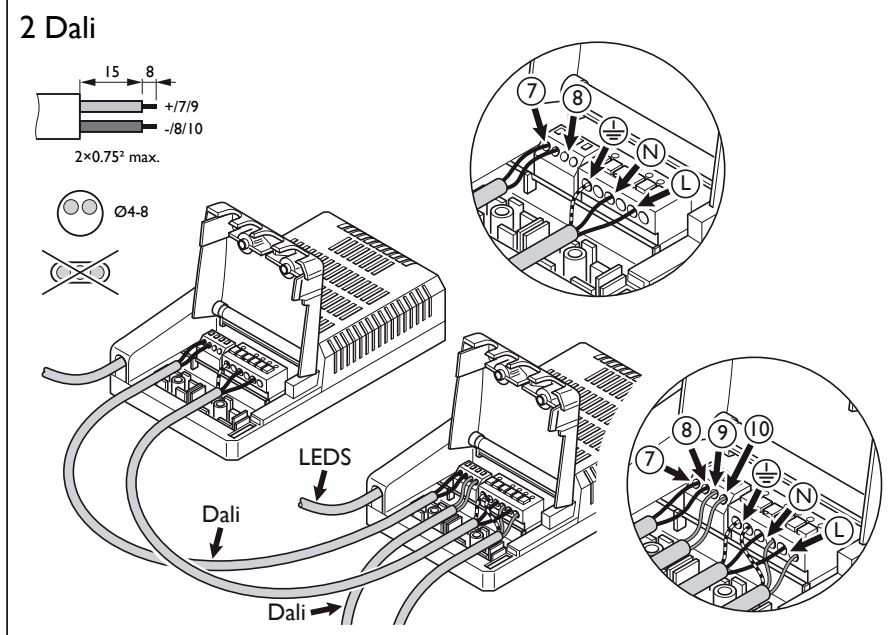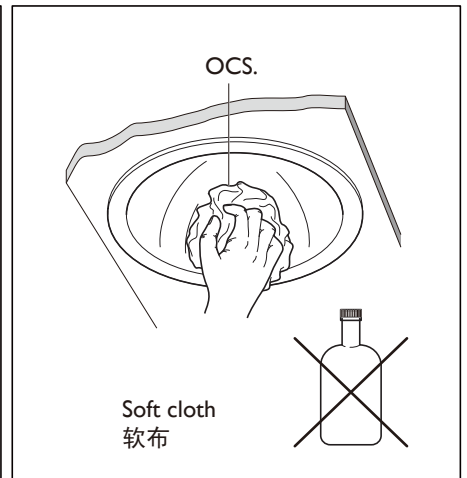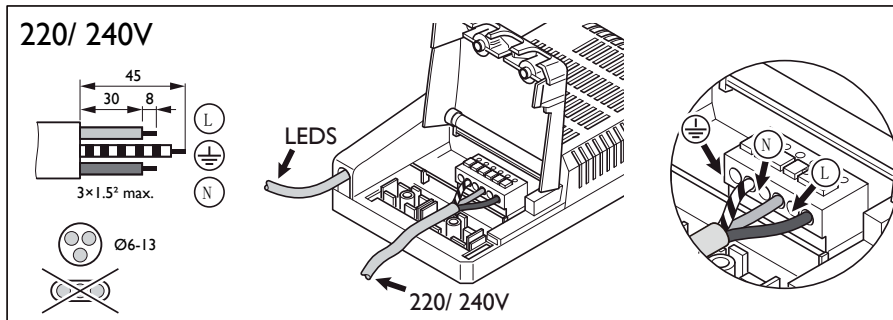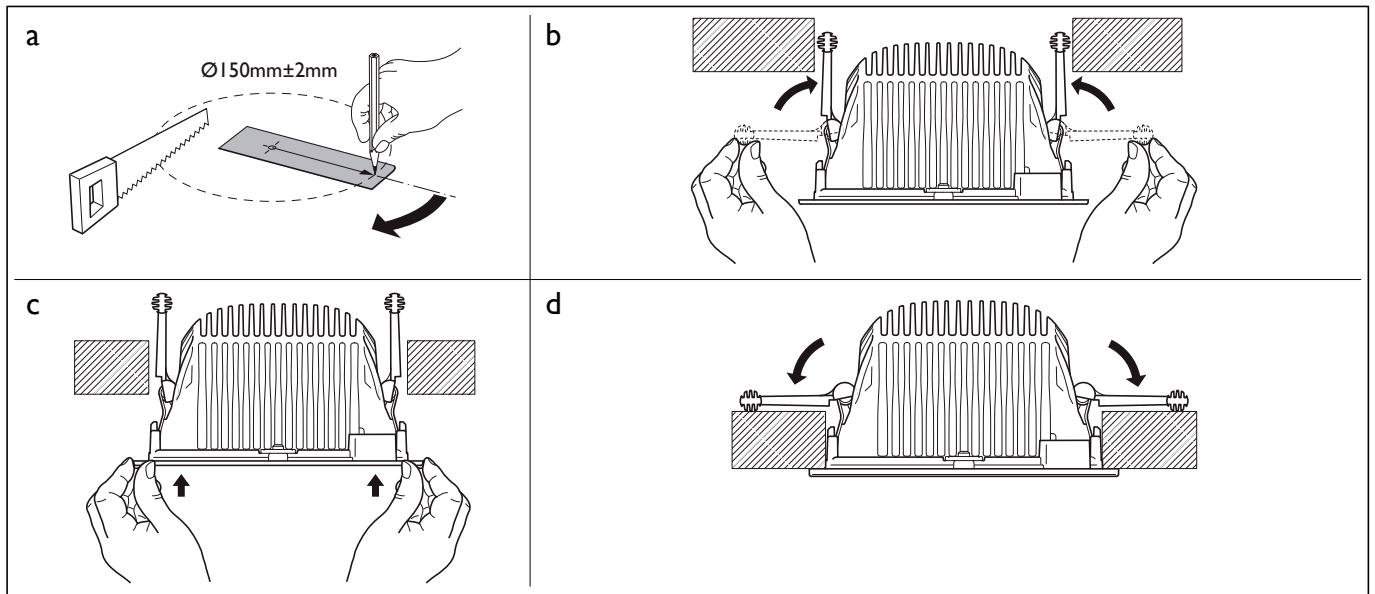


DRIVER LED'in - I 230/240V	
DRIVER LED'in - 2 DALI	
I X DLED 20W	
Electrical Characteristics	
Inom (A)	0.10
Imax (A)	7
TRef (μs)	40
MCB	
B-10A	31x
B-16A	50x
C-10A	40x
C-16A	60x

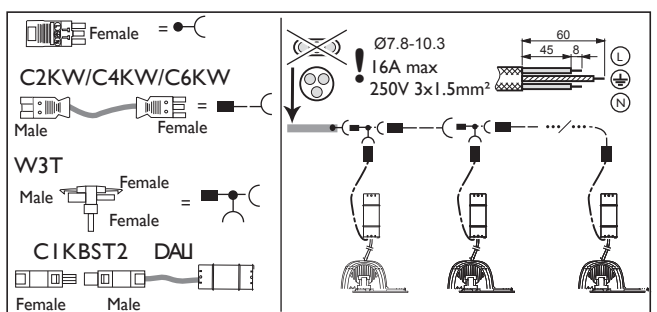

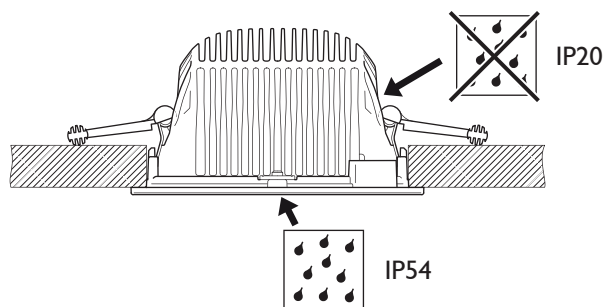


3


Removal/移除

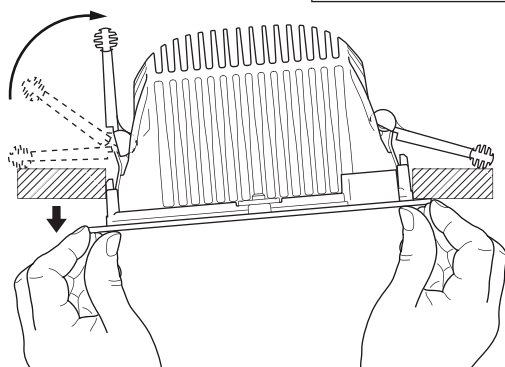


4a

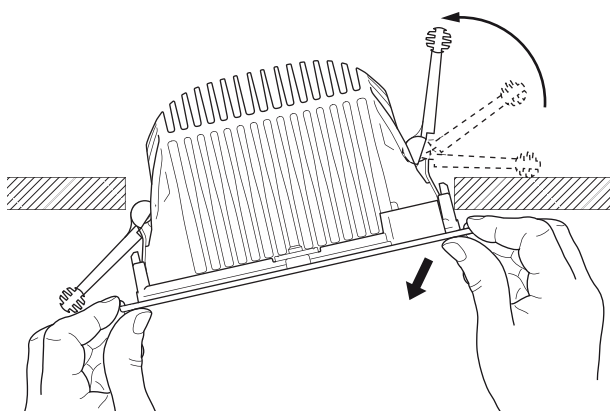


4b

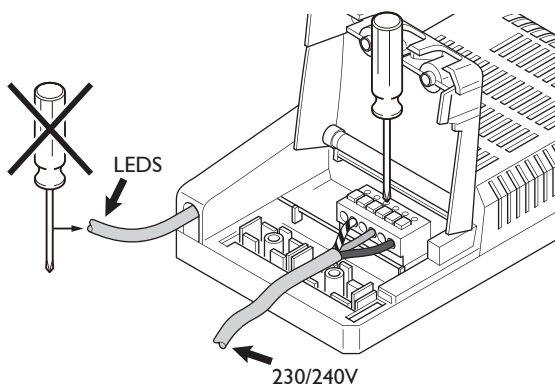


4c

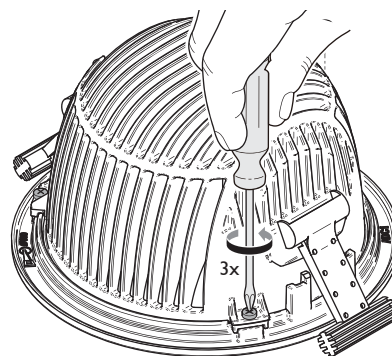

5a

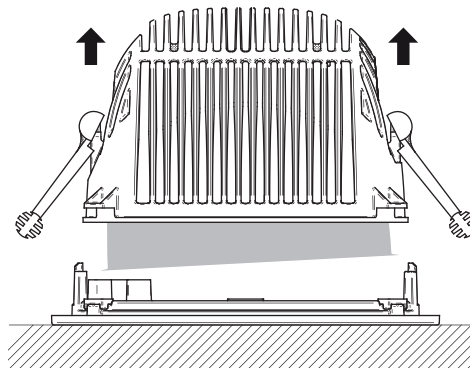

5b

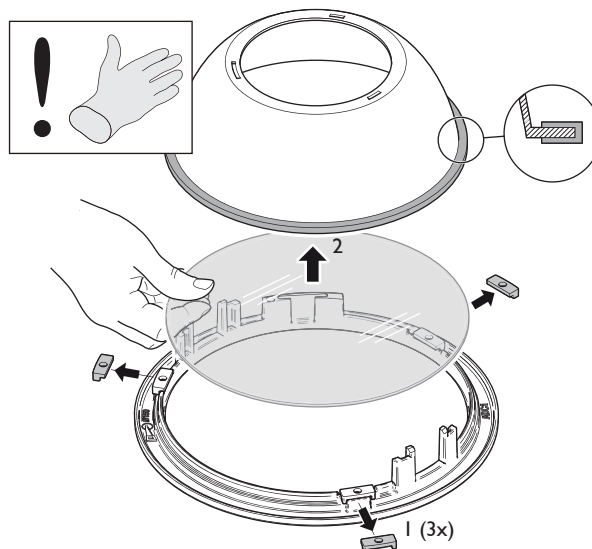

DO NOT DAMAGE/不要损坏

5c

Gasket1	1x
Gasket2	1x
Spacer	3x
Glass	1x

Reinstall: 5c, 5b, 5a, 4c,
b, c, d, 6

6

