


Mounting instruction 安装说明书


IEC EN60598	IEC EN60852-1		24V DC		ta 50°C		IP 65
----------------	------------------	---	-----------	---	------------	---	-------

[illegible]


3

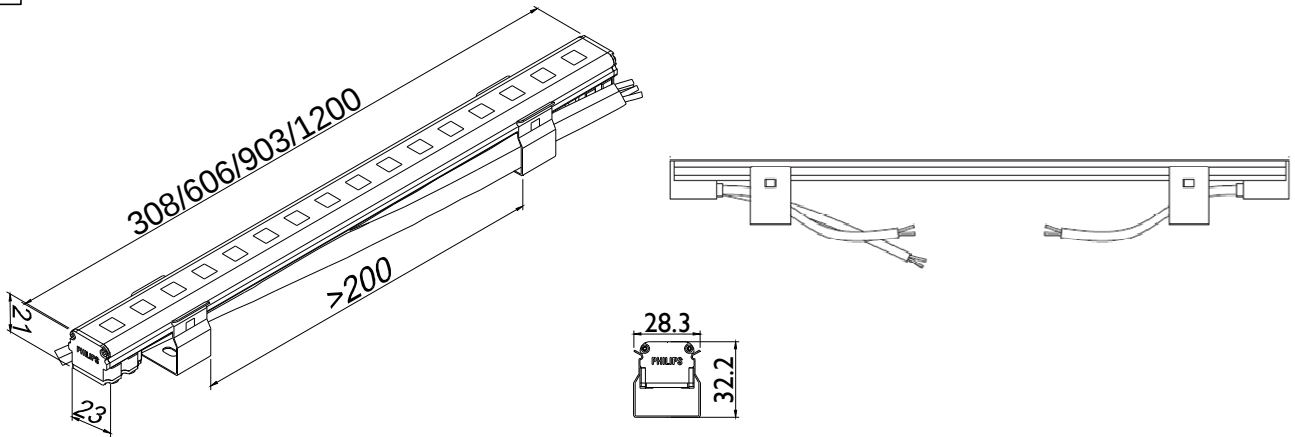

4

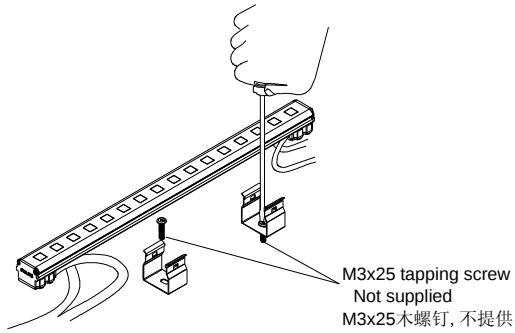

5

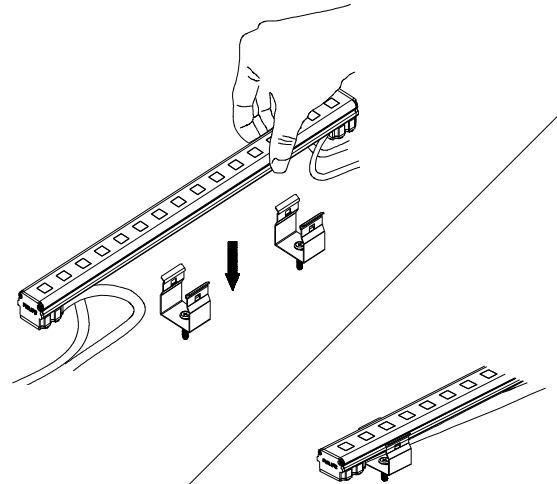

6

Controller wiring refer to mounting
instruction of controller
控制器电线参考控制
器安装说明书

Data Cable Input EIA RS-485
信号输入电缆 EIA RS-485

DMX512
Controller
DMX512控制器

AC220-
240V


Power Output
2x1.5mm² H07RN-F
2x1.5平方毫米电
源输出线

Power Output 2x1.0mm² H05RN-F
Brown: 24V Blue: GND
2x1平方毫米电源输
出线 棕色: 24V 蓝
色: 接地

Cable single run 50m Max.


Data Output 2x1.0mm² H05RN-F
White: Data+ Black: Data-
2x1平方毫米信号线
白色: 信号+ 黑色: 信号-

Cable single run 50m Max.

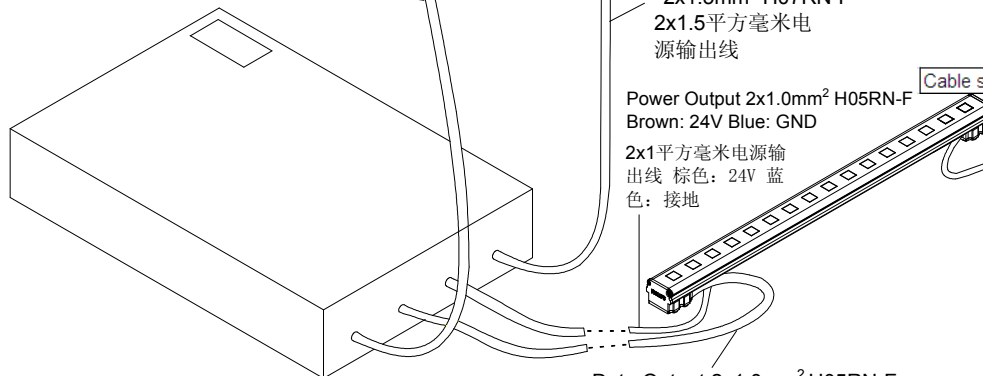

System Config.

系统配置图

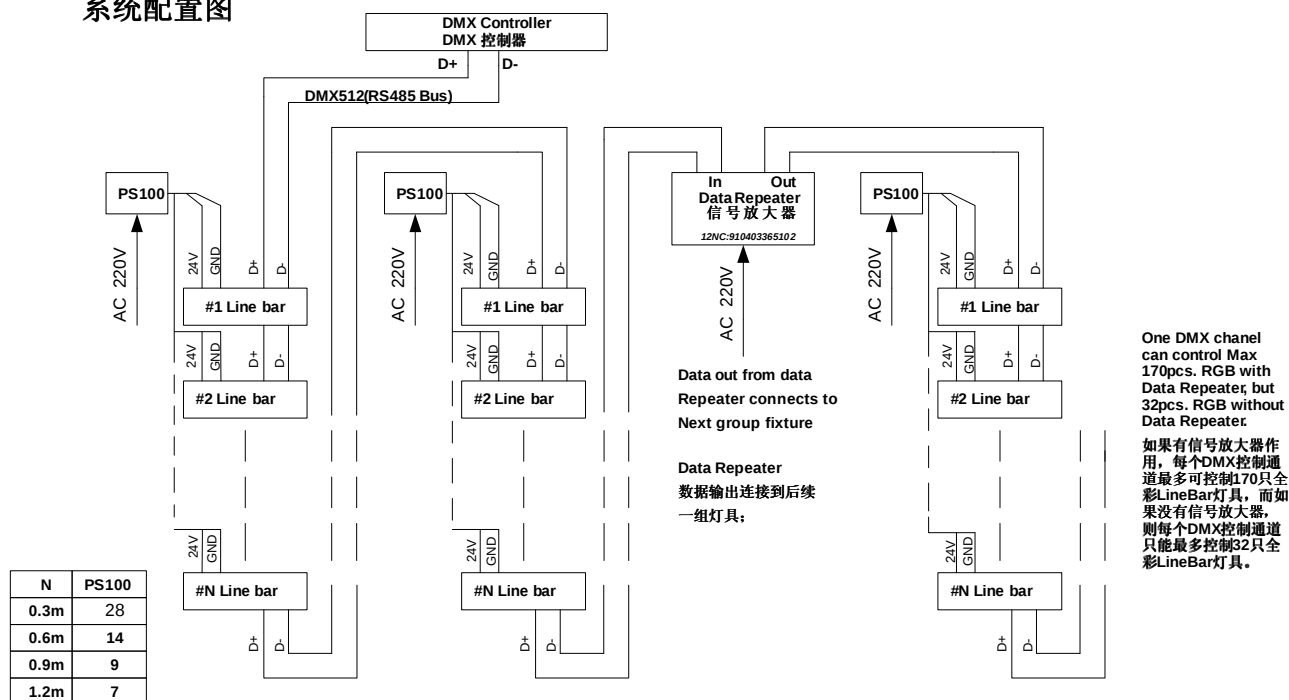

note: N-Serial number
for corresponding
LineBar per PS100

备注: N- 每个PS100
能配的相应灯具的最大
数量。

One DMX chanel
can control Max
170pcs. RGB with
Data Repeater, but
32pcs. RGB without
Data Repeater.

如果有信号放大器作
用, 每个DMX控制通
道最多可控制170只全
彩LineBar灯具, 而如
果没有信号放大器,
则每个DMX控制通道
只能最多控制32只全
彩LineBar灯具。

Note: 注意:

The device will be damaged if the data connector is connected to power input
错误地将信号连接器和电源连接器接在一起, 将会损坏置。