


TBH318

Mounting instruction 安装说明


4441 000 62181c




Type Number 型号	Voltage/ Hz 电压/频率	Lamp 光源	Ballast 镇流器	kg	A	B	C	D	E
TBH318/ 236	220V~/50Hz	2XTL-D36W	EBS	9	1197	297	100	1232.2	38
TBH318/ 336	220V~/50Hz	3XTL-D36W	EBP	13.5	1197	597	100	1232.2	38

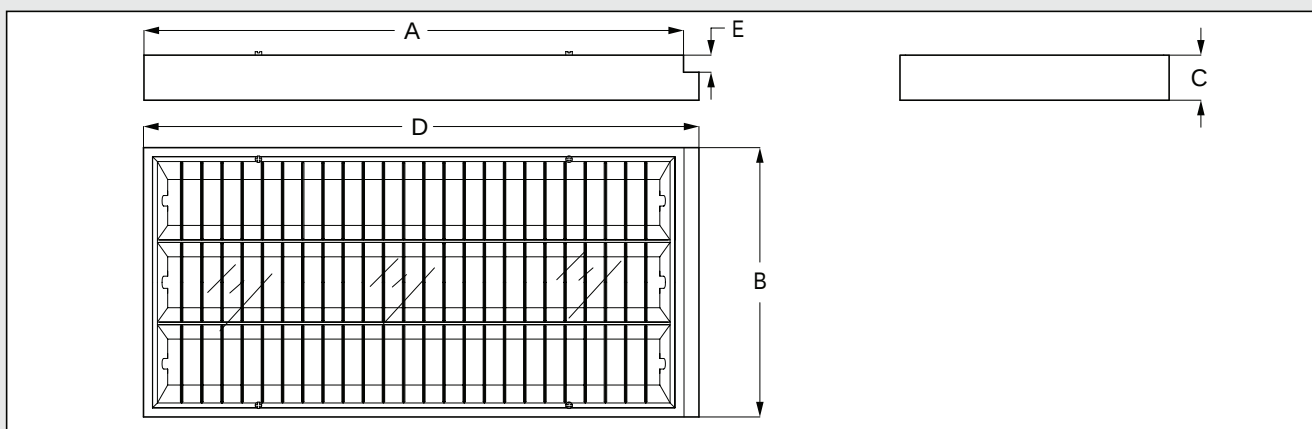


A Hidden installation 嵌入式安装

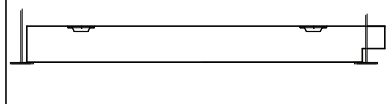


B Suspended installation 悬挂方安装

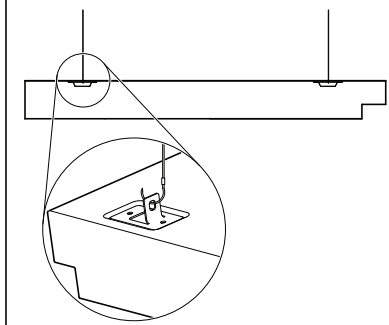


1 Open the diffuser cover.
Note: Please support the cover by hand when loosening the 4 screws.
旋松4个螺钉，注意在旋开螺钉时一定要用另一只手托住灯盖，并按图示方向打开灯盖

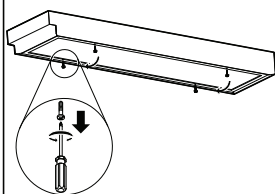


2 Remove the hook to open the cover completely. (only for width over 300mm)
将灯盖打开一个角度，取出挂钩（灯具宽度大于300mm）

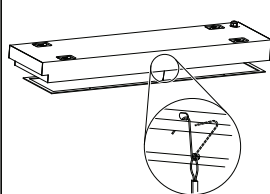


3 Install the PG cable gland and connect power cable to terminal block through the PG cable gland, then tighten the PG cable gland.
安装PG接头，将电源线从PG接头引入并连接，拧紧PG接头

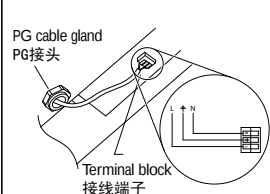

4 Insert lamp and rotate it 90°
按图示方式插入光源，并旋转90°

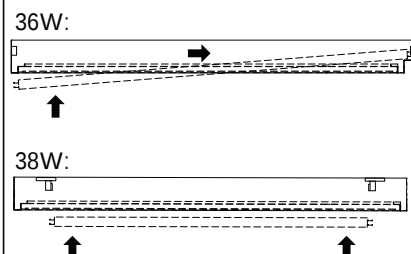

5 Close the cover and tighten the 4 screws by hand.
Note: hang the hook if the luminaire has before close the cover.
关上灯盖，并用手旋紧4个螺钉（注意：有挂钩的灯具，要先安装挂钩再合上灯具）

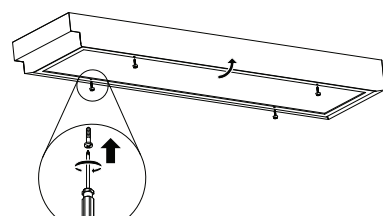

Under no circumstance should the luminaire be covered by thermally insulated material.
任何情况下灯具都不能被隔热衬垫或类似材料覆盖。