



TTX/TMX285

Mounting instruction 安装说明

4438 100 03071a



Type No 型号	Voltage / Frequency 电压 / 频率	Lamp 光源	Ballast 镇流器	Housing material 外壳材料	Diffuser material 透光罩材料	L(mm) 长度(mm)
TMX285 1xTL-D36W EBS	220V~ / 50Hz	1 x TL-D36W	EBS	AL Extrusion	PC	1240
TMX285 1xTL-D58W EBS	220V~ / 50Hz	1 x TL-D58W	EBS	AL Extrusion	PC	1540
TMX285 1xTL-D36W EBP	220V~ / 50Hz	1 x TL-D36W	EBP	AL Extrusion	PC	1240
TMX285 1xTL-D58W EBP	220V~ / 50Hz	1 x TL-D58W	EBP	AL Extrusion	PC	1540

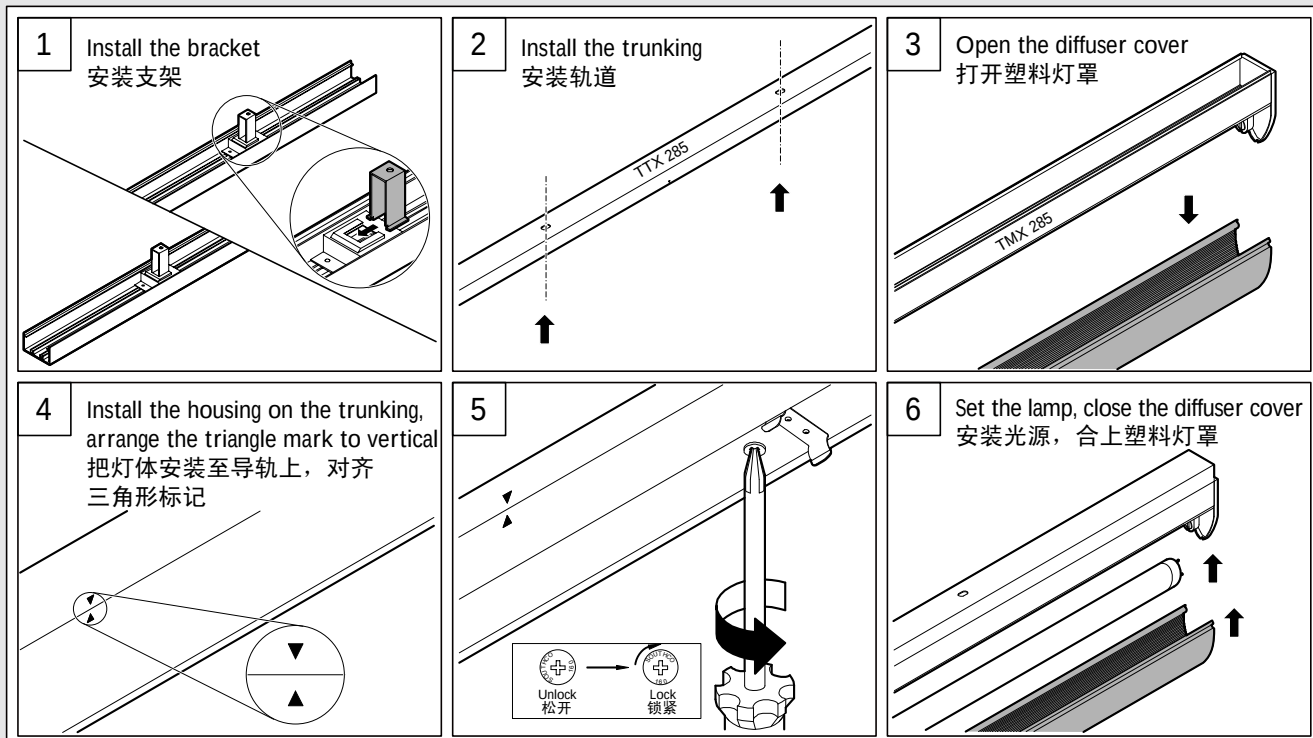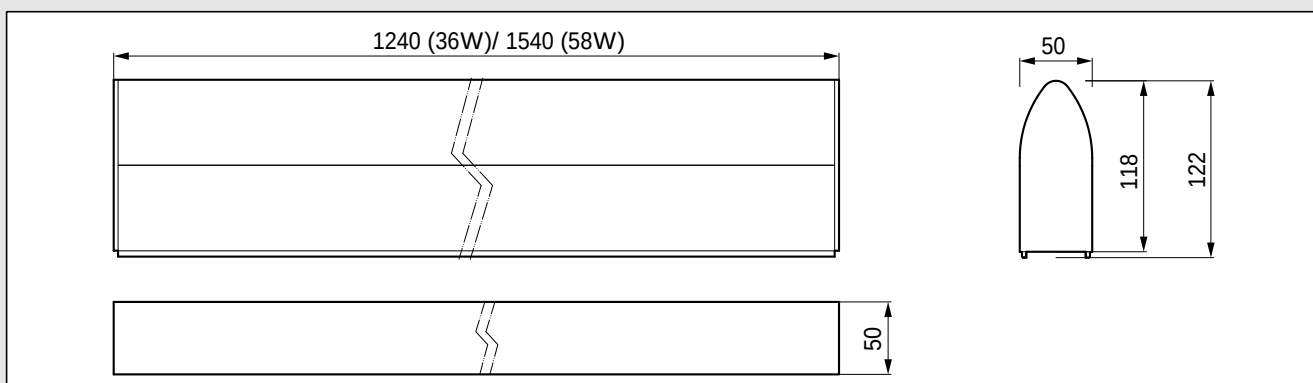

The wire diameter in trunking was MIN 2.5mm²; according to the inner label, current of the luminaire in series was MAX 16A.

轨道中最小线径2.5mm², 参考内标上电流值, 灯具串接总电流最大为16A。

Philips Lighting Luminaires (Shanghai) Co., Ltd.
Address: No. 2688, Huayi Road, Jiading, Shanghai, China
Postalcode: 201801

飞利浦灯具(上海)有限公司
地址: 中国上海市嘉定区马陆镇沪宜公路2688号
邮编: 201801

PHILIPS