



Siteco Mirrortec® Projector 150



尺寸图 (Dimension Drawing) :

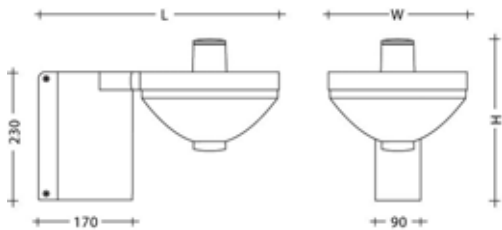

配光曲线 (LDC)

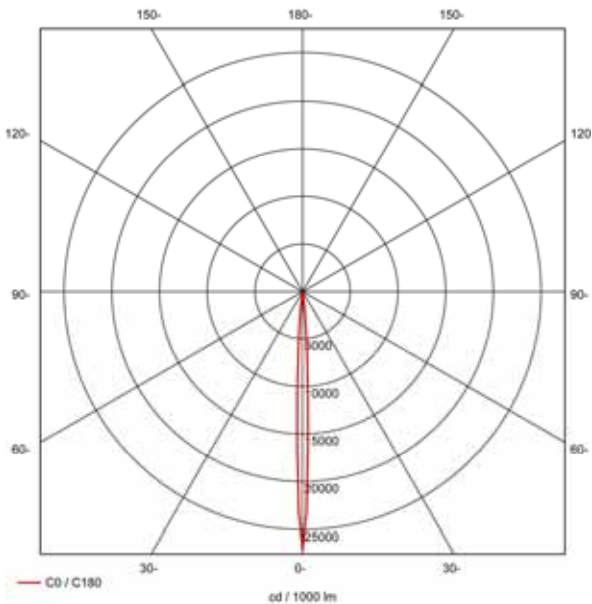

规格说明 / Specifications

品牌/Brand	西特科/Siteco
型号/Model	5NW 412 2-1PG1
产地/Origin	德国/Germany
光源/Lamp	欧司朗单端金卤灯 / OSRAM HQI-T
光源产地/Lamp Origin	德国/Germany
功率/Wattage	150W
光通量/Lumen	14,000lm
光效/Luminous efficiency	93lm/W
色温/Color temperature	参考欧司朗产品图册/Pls. refer to the OSRAM catalogue
显色性/Color rendering	>=80
电压/Voltage	220-230V/50Hz
电流/Current	1.8A
灯具效率/Efficiency	36.4%
灯体/Housing	高压高纯铸铝 / Die-cast aluminum
反射器/Reflector	高纯净阳极氧化铝 (99.9%) / High grade anodized aluminum (99.9%)
镇流器/Ballast	电感镇流器配补偿电容 CCG p.f. corrected
防护等级/IP rating	IP65
电 气 保 护 等 级	I 类/PCI
/Protection Class	
灯具尺寸及重量	参见尺寸图 / Pls. refer to the dimension drawing.
Dimensions & Weight	重量=5.2Kg/Weight=5.2Kg
适用范围/Application	二次反射系统专用头光灯/ Special patented design for secondary reflector system
其它/Others	- 超窄平行光束配光/Extremely narrow parallel beam - 灯体表面喷涂灰色(RAL 9006) / Housing color gray (RAL 9006) - 光源倒置/Inverted mounting position of lamp - 灯口出装有防护玻璃, 坚固、耐热/Toughened cover glass - 内置镇流器/Integral control gear - 灯头可水平或竖直旋转 /Projector head horizontally and vertically adjustable - 照明均匀度高, 溢出光线少 /High level of uniformity with minimal spill light - 维护方便, 更换光源无需工具/maintenance friendly, re-lamping without tools - 灯体 — 反射器建议安装距离 : 1-6 米 /Recommended distance projector to reflector:1-6m

备注：佑昌西特科照明（廊坊）有限公司保留未经事先通知而作任何修改的权利，特别是具体的数值，产品规格表中的插图、描述、订货号及其他声明可以变更。