




Siteco Mirrortec® Projector 400

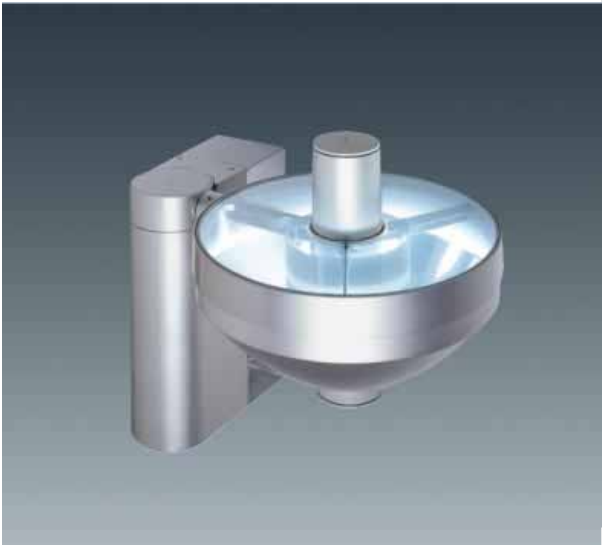

尺寸图 (Dimension Drawing):

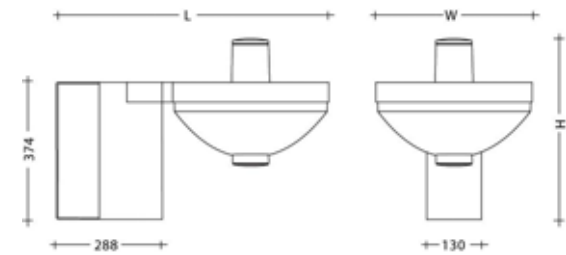

配光曲线 (LDC)

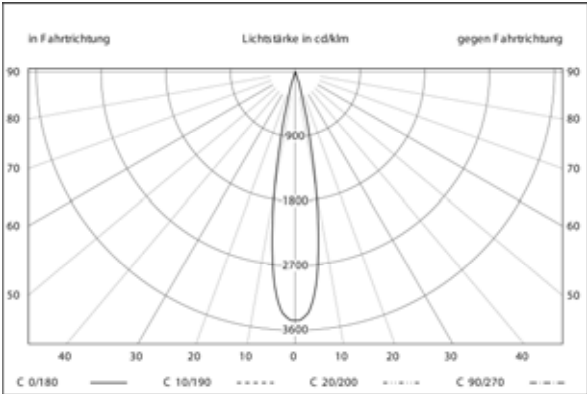

规格说明 / Specifications

品牌/Brand	西特科/Siteco
型号/Model	5NW 414 2-1RS2
产地/Origin	德国/Germany
光源/Lamp	欧司朗单端金卤灯 / OSRAM HQI-T
光源产地/Lamp Origin	德国/Germany
功率/Wattage	250W
光通量/Lumen	20,000lm
光效/Luminous efficiency	80lm/W
色温/Color temperature	5,300K
显色性/Color rendering	>=90
寿命/Life span	见说明文件
电压/Voltage	220-230V/50Hz
电流/Current	3.0A
灯具效率/Efficiency	41%
灯体/Housing	高压高纯铸铝 / Die-cast aluminum
反射器/Reflector	高纯净阳极氧化铝 (99.9%) / High grade anodized aluminum (99.9%)
镇流器/Ballast	详见规格表 / Pls. refer to the specification list
防护等级/IP rating	IP65
电 气 保 护 等 级	I 类/PCI
/Protection Class	
灯具尺寸及重量	参见尺寸图 / Pls. refer to the dimension drawing.
Dimensions & Weight	重量=18.0Kg/Weight=18.0Kg
其它/Others	<ul style="list-style-type: none">宽光束配光/wide beam灯体表面喷涂灰色 RAL 9006 / Housing color gray RAL 9006光源倒置/Inverted mounting position of lamp灯口出装有防护玻璃, 坚固、耐热/Toughened cover glass内置镇流器/Integral control gear灯头可水平或竖直旋转 /Projector head horizontally and vertically adjustable照明均匀度高, 溢出光线少/High level of uniformity with minimal spill light维护方便, 更换光源无需工具/maintenance friendly, re-lamping without tools灯体—反射器建议安装距离: 2-12 米 /Recommended distance projector to reflector:2-12m适用于对视觉、设计美感有高要求的楼梯照明 Application: building illumination with high demands in aesthetic and design

备注：佑昌西特科照明（廊坊）有限公司保留未经事先通知而作任何修改的权利，特别是具体的数值，产品规格表中的插图、描述、订货号及其他声明可以变更。