




SiCompact A2 MIDI

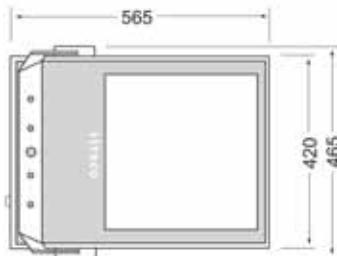


尺寸图 (Dimension Drawing):

$A_w=0.10m^2$

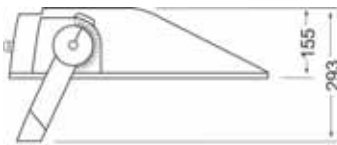

配光曲线 (LDC):

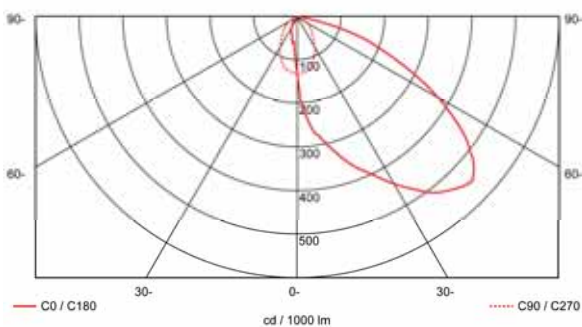

规格说明 / Specifications

品牌/Brand	西特科/Siteco
型号/Model	5NA 758 0-1VS0208H
产地/Origin	德国/Germany
光源/Lamp	欧司朗双端碘钨灯/OSRAM HALOLINE® Tungsten halogen lamps
光源产地/Lamp Origin	德国/Germany
功率/Wattage	1000W
光通量/Lumen	22,000lm
光效/Luminous efficiency	22lm/W
色温/Color temperature	约 3,000K/ approx. 3,000K
灯头/base	R7s
寿命/Life span	见说明文件
电压/Voltage	230V/50Hz
灯体/Housing	高压高纯铸铝 / Die-cast aluminum

反射器/Reflector	高纯净铝材 / High grade aluminum
镇流器/Ballast	详见规格表 / Pls. refer to the specification list
防护等级/IP rating	IP66
电气保护等级 IP	I 类/PCI
灯具效率	63.7%
Luminaire efficiency	
灯具尺寸及重量	参见尺寸图 / Pls. refer to the dimension drawing.
Dimensions & Weight	W=12.7Kg

其它/Others

- 灯体颜色为 Siteco 金属灰
Housing surface coated in Siteco metallic gray
- 宽光束配光，非对称 / Wide beam, asymmetrical lighting distribution
- 无触发器或电器，适用于应急照明
Without ignitor or control gear, designed for emergency lighting
- 灯罩为平板安全玻璃
Enclosure with flat safety glass
- 配补偿电容 / P. f. corrected
- 具有防止灯体旋转的功能 (防球击)
Integrated protection against twisting (ball proofed for sports application)
- 灯体装有调光刻度装置
Integrated friction lock
- 配压强平衡系统，内有空气渗透膜，可防止冷凝水在玻璃罩内部形成
Pressure equalization system with air-permeable connector for avoidance of condensation