CONNECTIONS mane



www.sparklan.cn **WCFM-100** Wireless 802.11g **Compact Flash (CF) Adapter**

RoHS Compliant and Pb-free

Your Pocket PC can be free from the tangle of wires

SparkLAN WCFM-100 Wireless 802.11g 54Mbps CF card adapter lets your PDA devices carry wireless network to anyplace no matter where you go. With the WCFM-100 CF card adapter-enabled in your Pocket PC (PPC), you can synchronize your PC's outlook folder, journal, email, contact list, music, or document wirelessly. WCFM-100 CF card adapter liberates you from the confines of the cord and enjoys the extreme mobility. Certainly, it adds the flexibility to connect internet with the CF card adapter-equipped handheld devices. It is designed for travelers and business users while they frequently check schedule, contact list, or surfing the web to look for instant information anywhere.

RoHS compliant and Pb-free device

To reinforce commitment to environmentally-responsible standards, SparkLAN WCFM-100 is RoHS compliant and Pb(lead)-free devices. SparkLAN is steadfastly developing effective technical solutions that reduce Pb content and achieve RoHS compliance without sacrificing product features.

PRODUCT HIGHLIGHTS

- IEEE 802.11g/b compliant with data rate of up to 54 Mbps
- Ideal for travelers and business
- Compact Flash(CF) format
- Advanced security: 64 & 128 bit WEP, WPA with TKIP, WPA-PSK with TKIP, and 802.1X.

FEATURES & BENEFITS


- RoHS compliant and Pb-free
- Synchronize your PC's outlook folders wirelessly

Wireless CF Card

Adapter

Spark

- Easy for integration into handheld device
- Easy to set up and configure
- OS support: Windows CE4.2/5.0, Liunx

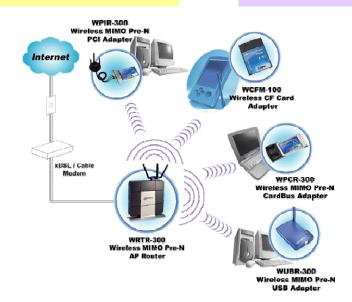

CONNECTIONS ERSY MADE



SPECIFICATION

<i>Mark</i>	
Connections Made	Easy WWW. Sparklan. Cn
	1 an Cli
	rk l'all.
	cnalm
	W. SP
SPECIFICATION	
Hardware Features	
Interface	Compact Flash
LED Indicator	Power, Link
Antenna	Internal diversity antenna
Manufacture	Pb-free, RoHS compliant
Radio Characteristics	
Standard	IEEE 802.11b/g
Frequency Bands	802.11b/g : ISM-Band 2.412~ 2.4835GHz
Modulation Tech	802.11g: OFDM 802.11b: CCK, DQPSK; DBPSK
Media Access Protocol	CSMA/CA with ACK
Receive Sensitivity	802.11g: 54 Mbps 10-5 BER @ -73dBm;
Power consumption	TX: 480mA
	Rx : 270mA
Coffeenance Frankrunge	Idel: 1.2mA
Software Features	64bit/128bit WEP Encryption
Security	WPA with TKIP
	WPA-PSK with TKIP
	802.1x
OS Support	Windows CE4.2/5.0 Liunx
Environmental Specifi	cations
Dimension	56x42x5mm (LxWxH)
Weight	10g
Temperature	0°C~60°C(operating), -40°C ~ 85°C(storage)
Humidity	Max 95% (Non condensing)
Output Power	12.5 dBm +/- 1 dBm 802.11g
	14 dBm +/- 1 dBm 802.11b
SYSTEM REQUIREMEN	Т
CPU Support	TI OMAP 1510
	Intel Boulverde PXA270 and XScale
CERTIFICATION FCC, CE	
WARRANTY	
1 Year	
PACKAGE CONTENTS	
 WCFM-100 wireless 	CF adapter CD-ROM (Driver, Utility, QIG, User Manuel)
Multi-language Quick Installation Guide	

RELATED PRODUCTS



SparkLAN WL-611R 11g Cardbus



SparkLAN WL-660R 11g PCI Adapter

SparkLAN WL-685R 11g USB Dongle

电话: 020-28817998

传真: 020-28817998