

140FF- 2Z- A2-1/2/3

RELAY SOCKET



CHARACTERISTICS

|                              |                |
|------------------------------|----------------|
| Ambient temperature :        | -40 °C to 70°C |
| Rated voltage:               | 300VAC         |
| Rated current :              | 10A (per pole) |
| Insulation voltage (Min.) :  | 5000VAC        |
| Protection degree DIN40050 : | IP20           |
| Socket material :            | PBT V0 (UL)    |
| Contacts spring material :   | QSn6.5-0.1     |
| Steel retainer :             | available      |
| White plastic tag :          | non-available  |



Applicable relay type:

- 1: suit for HF115F(JQX-115F) series (Relay height 15.7mm).
- 2: suit for HF140FF(JZX-140FF) (Relay height 25.5mm).
- 3: suit for HF14FW(JQX-14FW) (Relay height 26.3mm).

DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM


Unit: mm

Outline Dimensions

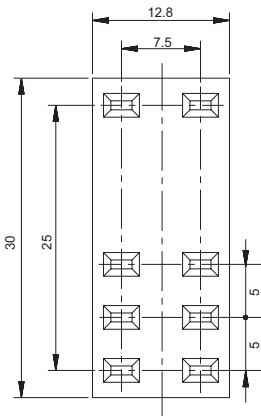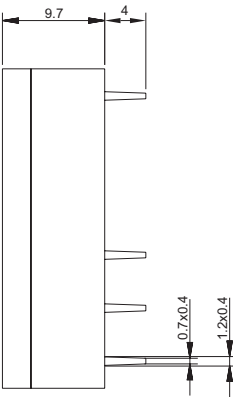


(Top View)

PCB Layout

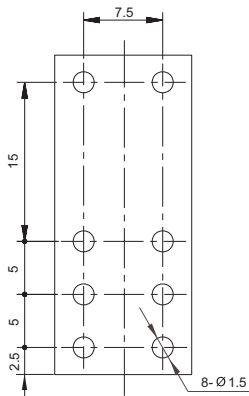

Retainer Dimensions



Three types of retainer height (H) :

H1=17.2mm (for -1 type)

H2=27.2mm (for -2 type)

H3=27.8mm (for -3 type)

You can choose the type you need.



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.00