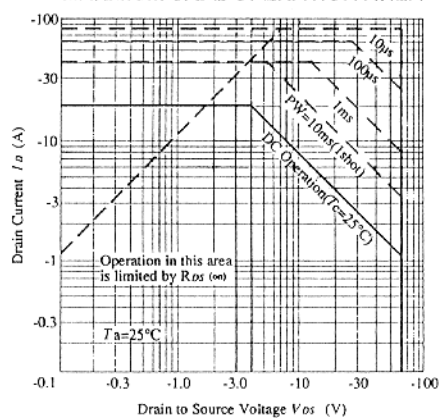
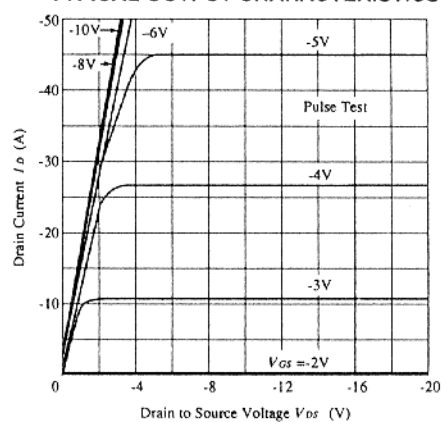
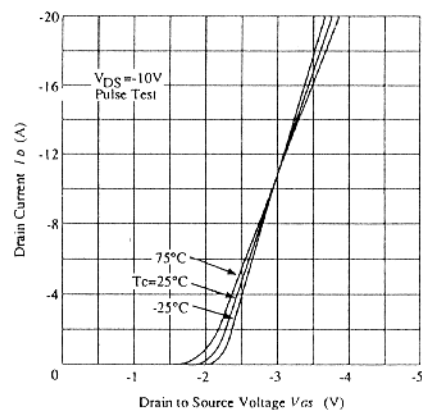
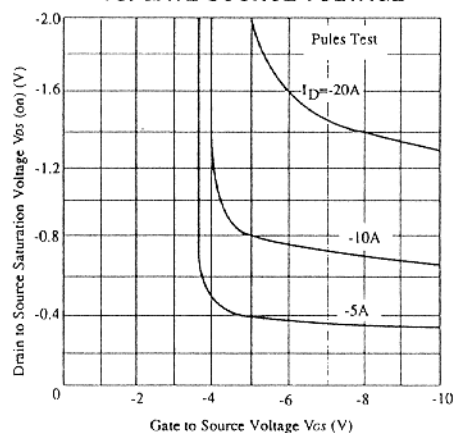
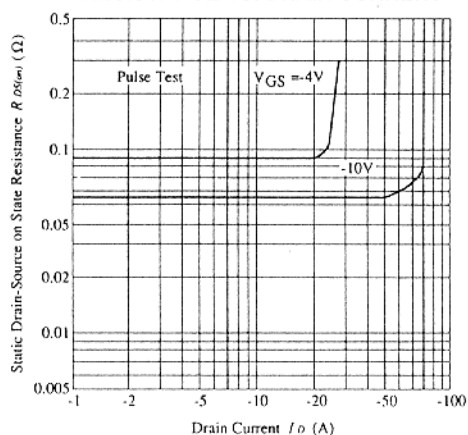
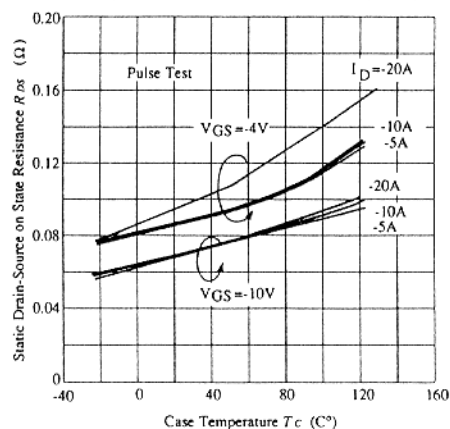
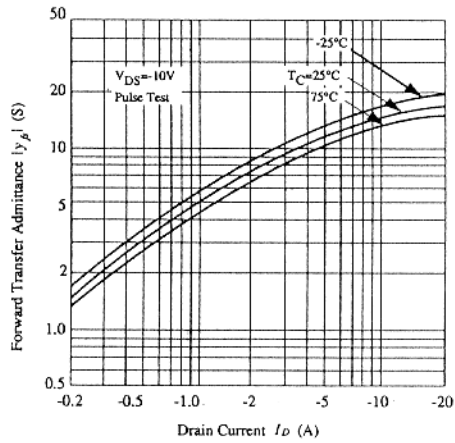



*Pulse Test

MAXIMUM SAFE OPERATION AREA

TYPICAL OUTPUT CHARACTERISTICS

TYPICAL TRANSFER CHARACTERISTICS

DRAIN-SOURCE SATURATION VOLTAGE VS. GATE-SOURCE VOLTAGE

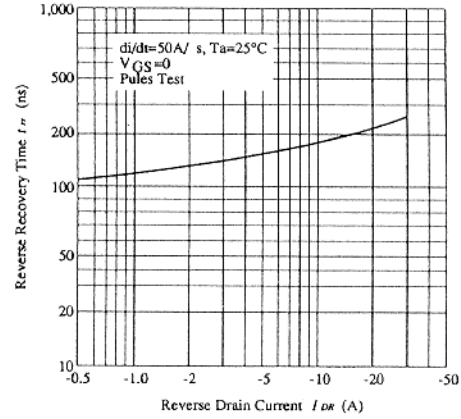STATIC DRAIN-SOURCE ON STATE RESISTANCE VS. DRAIN CURRENT

STATIC DRAIN-SOURCE ON STATE RESISTANCE VS. TEMPERATURE


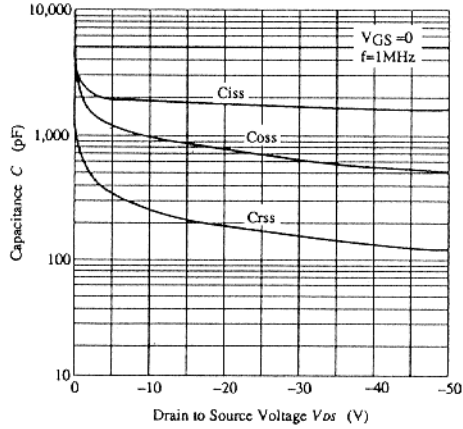
**FORWARD TRANSFER ADMITTANCE
VS. DRAIN CURRENT**




**BODY-DRAIN DIODE REVERSE
RECOVERY TIME**




**TYPICAL CAPACITANCE
VS. DRAIN-SOURCE VOLTAGE**




DYNAMIC INPUT CHARACTERISTICS

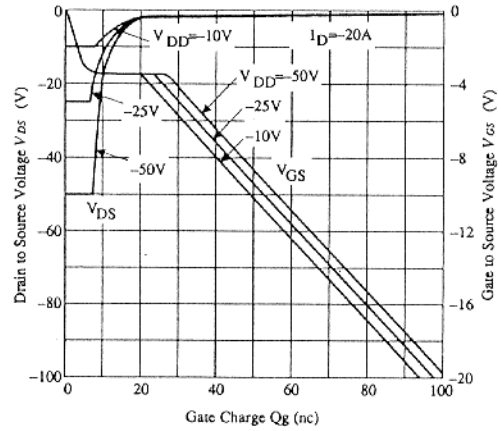


SWITCHING CHARACTERISTICS

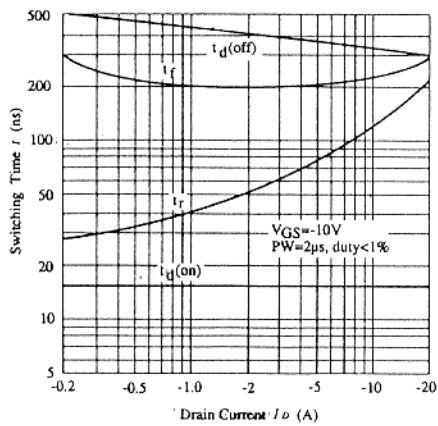


**REVERSE DRAIN CURRENT VS.
SOURCE TO DRAIN VOLTAGE**

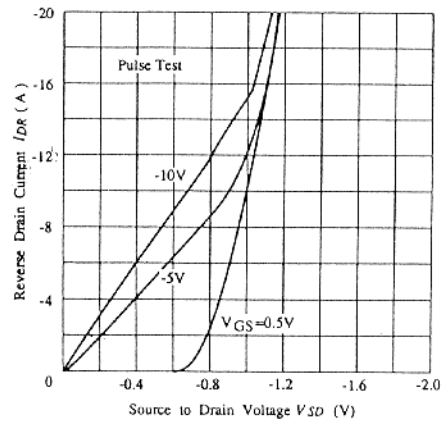

NORMALIZED TRANSIENT THERMAL IMPEDANCE VS. PULSE WIDTH

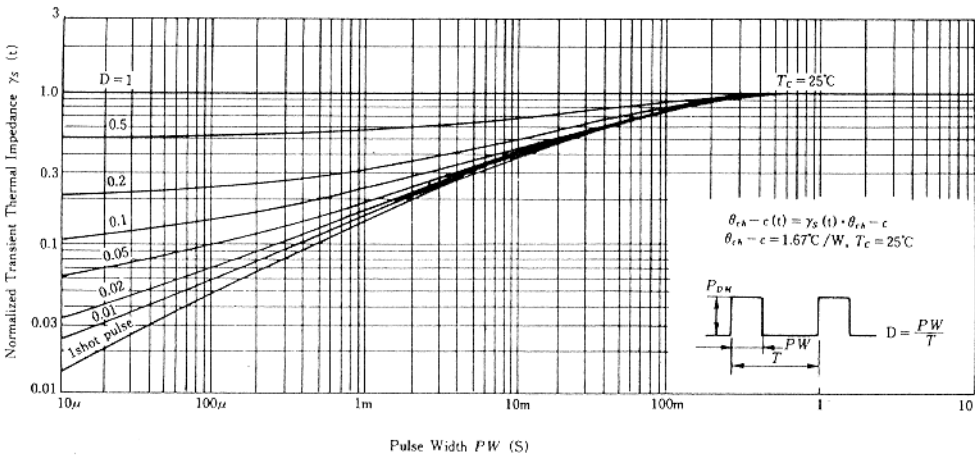

SWITCHING TIME TEST CIRCUIT

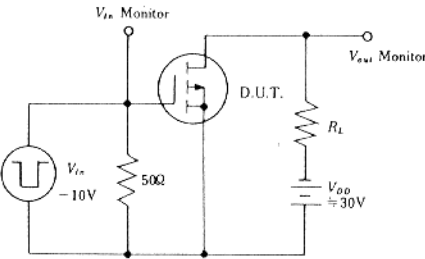

WAVEFORMS

