


Low  $V_{CE(sat)}$  IGBT with Diode  
High speed IGBT with Diode

IXGH 17 N100U1  
IXGH 17 N100AU1


| $V_{CES}$ | $I_{C25}$ | $V_{CE(sat)}$ |
|-----------|-----------|---------------|
| 1000 V    | 34 A      | 3.5 V         |
| 1000 V    | 34 A      | 4.0 V         |

## Combi Packs



| Symbol                                                                          | Test Conditions                                                                                                              | Maximum Ratings                   |                  |
|---------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|------------------|
| $V_{CES}$                                                                       | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$                                                                              | 1000                              | V                |
| $V_{CGR}$                                                                       | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ ; $R_{GE} = 1\text{ M}\Omega$                                                | 1000                              | V                |
| $V_{GES}$                                                                       | Continuous                                                                                                                   | $\pm 20$                          | V                |
| $V_{GEM}$                                                                       | Transient                                                                                                                    | $\pm 30$                          | V                |
| $I_{C25}$                                                                       | $T_C = 25^\circ\text{C}$                                                                                                     | 34                                | A                |
| $I_{C90}$                                                                       | $T_C = 90^\circ\text{C}$                                                                                                     | 17                                | A                |
| $I_{CM}$                                                                        | $T_C = 25^\circ\text{C}$ , 1 ms                                                                                              | 68                                | A                |
| <b>SSOA (RBSOA)</b>                                                             | $V_{GE} = 15\text{ V}$ , $T_{VJ} = 125^\circ\text{C}$ , $R_G = 82\ \Omega$<br>Clamped inductive load, $L = 100\ \mu\text{H}$ | $I_{CM} = 34$<br>@ $0.8\ V_{CES}$ | A                |
| $P_C$                                                                           | $T_C = 25^\circ\text{C}$                                                                                                     | 150                               | W                |
| $T_J$                                                                           |                                                                                                                              | -55 ... +150                      | $^\circ\text{C}$ |
| $T_{JM}$                                                                        |                                                                                                                              | 150                               | $^\circ\text{C}$ |
| $T_{stg}$                                                                       |                                                                                                                              | -55 ... +150                      | $^\circ\text{C}$ |
| $M_d$                                                                           | Mounting torque (M3)                                                                                                         | 1.13/10                           | Nm/lb.in.        |
| <b>Weight</b>                                                                   |                                                                                                                              | 6                                 | g                |
| Maximum lead temperature for soldering<br>1.6 mm (0.062 in.) from case for 10 s |                                                                                                                              | 300                               | $^\circ\text{C}$ |

TO-247 AD



G = Gate, C = Collector,  
E = Emitter, TAB = Collector

## Features

- International standard package JEDEC TO-247 AD
- IGBT and anti-parallel FRED in one package
- 2nd generation HDMOS™ process
- Low  $V_{CE(sat)}$ 
  - for minimum on-state conduction losses
- MOS Gate turn-on
  - drive simplicity
- Fast Recovery Epitaxial Diode (FRED)
  - soft recovery with low  $I_{RM}$

## Applications


- AC motor speed control
- DC servo and robot drives
- DC choppers
- Uninterruptible power supplies (UPS)
- Switch-mode and resonant-mode power supplies

## Advantages

- Saves space (two devices in one package)
- Easy to mount (isolated mounting screw hole)
- Reduces assembly time and cost

| Symbol        | Test Conditions                                       | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |                           |
|---------------|-------------------------------------------------------|-----------------------------------------------------------------------------------|------|---------------------------|
|               |                                                       | min.                                                                              | typ. | max.                      |
| $BV_{CES}$    | $I_C = 4.5\text{ mA}$ , $V_{GE} = 0\text{ V}$         | 1000                                                                              |      | V                         |
| $V_{GE(th)}$  | $I_C = 500\ \mu\text{A}$ , $V_{CE} = V_{GE}$          | 2.5                                                                               |      | 5.5 V                     |
| $I_{CES}$     | $V_{CE} = 0.8 \cdot V_{CES}$<br>$V_{GE} = 0\text{ V}$ |                                                                                   |      | 500 $\mu\text{A}$<br>8 mA |
| $I_{GES}$     | $V_{CE} = 0\text{ V}$ , $V_{GE} = \pm 20\text{ V}$    |                                                                                   |      | $\pm 100\text{ nA}$       |
| $V_{CE(sat)}$ | $I_C = I_{C90}$ , $V_{GE} = 15\text{ V}$              |                                                                                   |      | 3.5 V<br>4.0 V            |
|               |                                                       |                                                                                   |      | 17N100U1<br>17N100AU1     |

| Symbol       | Test Conditions                                                                                                                          | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |          |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|----------|
|              |                                                                                                                                          | min.                                                                              | typ. | max.     |
| $g_{fs}$     | $I_C = I_{C90}$ ; $V_{CE} = 10\text{ V}$ ,<br>Pulse test, $t \leq 300\text{ }\mu\text{s}$ , duty cycle $\leq 2\%$                        | 6                                                                                 | 15   | S        |
| $C_{ies}$    | $V_{CE} = 25\text{ V}$ , $V_{GE} = 0\text{ V}$ , $f = 1\text{ MHz}$                                                                      |                                                                                   | 1500 | pF       |
| $C_{oes}$    |                                                                                                                                          |                                                                                   | 210  | pF       |
| $C_{res}$    |                                                                                                                                          |                                                                                   | 40   | pF       |
| $Q_g$        | $I_C = I_{C90}$ , $V_{GE} = 15\text{ V}$ , $V_{CE} = 0.5 V_{CES}$                                                                        |                                                                                   | 100  | nC       |
| $Q_{ge}$     |                                                                                                                                          |                                                                                   | 20   | nC       |
| $Q_{gc}$     |                                                                                                                                          |                                                                                   | 60   | nC       |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 25^\circ\text{C}</math></b>                                                                               |                                                                                   | 100  | ns       |
| $t_{ri}$     | $I_C = I_{C90}$ , $V_{GE} = 15\text{ V}$ , $L = 300\text{ }\mu\text{H}$ ,<br>$V_{CE} = 0.8 V_{CES}$ , $R_G = R_{off} = 82\text{ }\Omega$ |                                                                                   | 200  | ns       |
| $t_{d(off)}$ | Remarks: Switching times<br>may increase                                                                                                 |                                                                                   | 500  | 1000 ns  |
| $t_{fi}$     | for $V_{CE}(\text{Clamp}) > 0.8 \cdot V_{CES}$ ,<br>higher $T_J$ or increased $R_G$                                                      | 17N100U1                                                                          | 750  | ns       |
| $E_{off}$    |                                                                                                                                          | 17N100AU1                                                                         | 450  | ns       |
|              |                                                                                                                                          | 17N100AU1                                                                         | 3    | mJ       |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 125^\circ\text{C}</math></b>                                                                              |                                                                                   | 100  | ns       |
| $t_{ri}$     | $I_C = I_{C90}$ , $V_{GE} = 15\text{ V}$ , $L = 300\text{ }\mu\text{H}$                                                                  |                                                                                   | 200  | ns       |
| $E_{on}$     | $V_{CE} = 0.8 V_{CES}$ , $R_G = R_{off} = 82\text{ }\Omega$                                                                              |                                                                                   | 2.5  | mJ       |
| $t_{d(off)}$ | Remarks: Switching times<br>may increase                                                                                                 |                                                                                   | 700  | 1000 ns  |
| $t_{fi}$     | for $V_{CE}(\text{Clamp}) > 0.8 \cdot V_{CES}$ ,<br>higher $T_J$ or increased $R_G$                                                      | 17N100U1                                                                          | 1200 | 2000 ns  |
| $E_{off}$    |                                                                                                                                          | 17N100AU1                                                                         | 750  | 1000 ns  |
|              |                                                                                                                                          | 17N100U1                                                                          | 8    | mJ       |
|              |                                                                                                                                          | 17N100AU1                                                                         | 6    | mJ       |
| $R_{thJC}$   |                                                                                                                                          |                                                                                   |      | 0.83 K/W |
| $R_{thCK}$   |                                                                                                                                          |                                                                                   | 0.25 | K/W      |

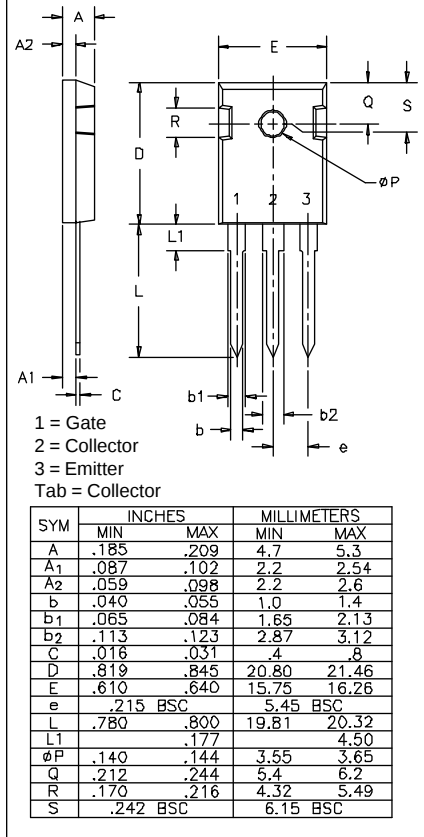**TO-247 AD Outline**


| Symbol     | Test Conditions                                                                                                                                                                           | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |       |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|-------|
|            |                                                                                                                                                                                           | min.                                                                              | typ. | max.  |
| $V_F$      | $I_F = I_{C90}$ , $V_{GE} = 0\text{ V}$ ,<br>Pulse test, $t \leq 300\text{ }\mu\text{s}$ , duty cycle $d \leq 2\%$                                                                        |                                                                                   |      | 2.5 V |
| $I_{RM}$   | $I_F = I_{C90}$ , $V_{GE} = 0\text{ V}$ , $-di_F/dt = 240\text{ A}/\mu\text{s}$<br>$V_R = 540\text{ V}$<br>$I_F = 1\text{ A}$ ; $-di/dt = 100\text{ A}/\mu\text{s}$ ; $V_R = 30\text{ V}$ |                                                                                   | 16   | 18 A  |
| $t_{tr}$   |                                                                                                                                                                                           |                                                                                   | 120  | ns    |
|            |                                                                                                                                                                                           |                                                                                   | 35   | 50 ns |
| $R_{thJC}$ |                                                                                                                                                                                           |                                                                                   |      | 1 K/W |

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETS and IGBTs are covered by one or more of the following U.S. patents:

|           |           |           |           |           |           |
|-----------|-----------|-----------|-----------|-----------|-----------|
| 4,835,592 | 4,881,106 | 5,017,508 | 5,049,961 | 5,187,117 | 5,486,715 |
| 4,850,072 | 4,931,844 | 5,034,796 | 5,063,307 | 5,237,481 | 5,381,025 |

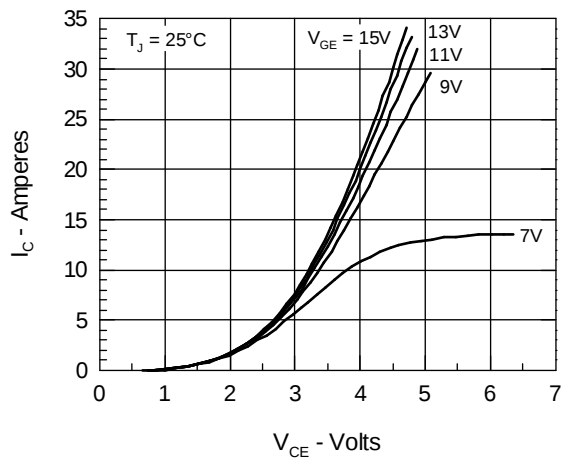
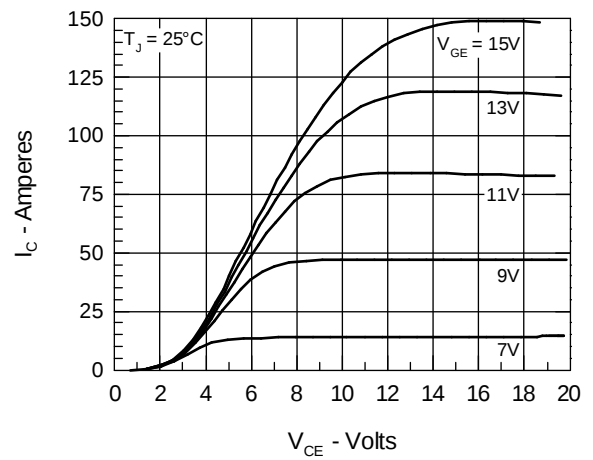
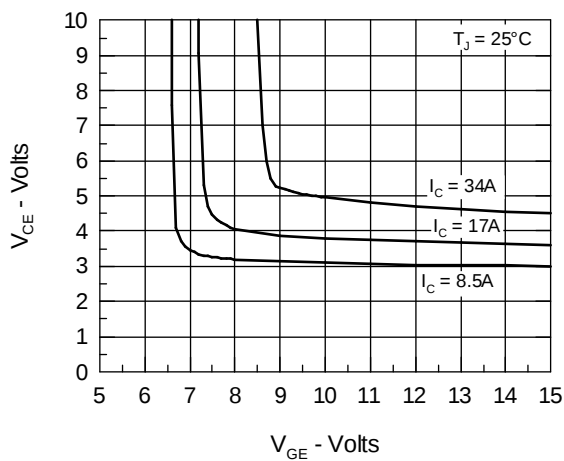
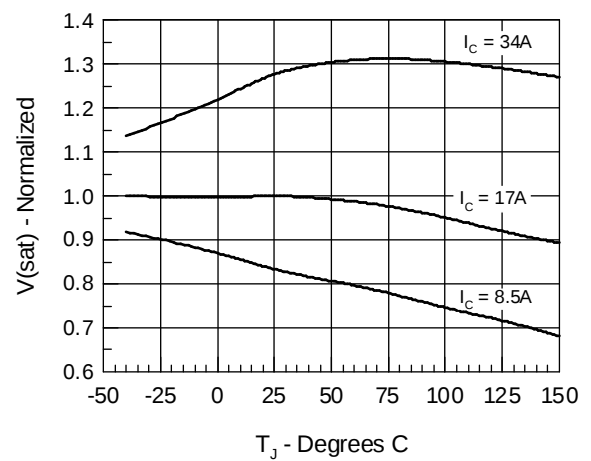
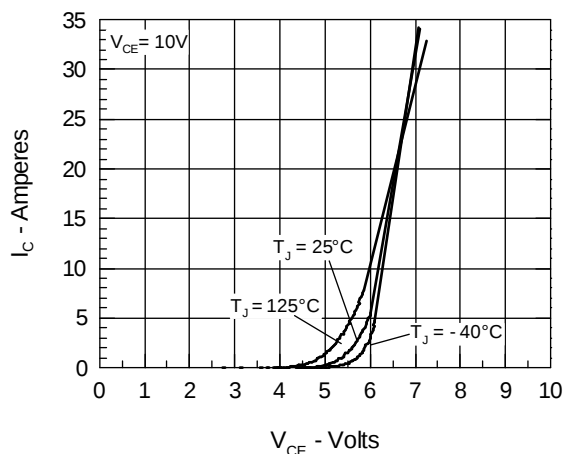
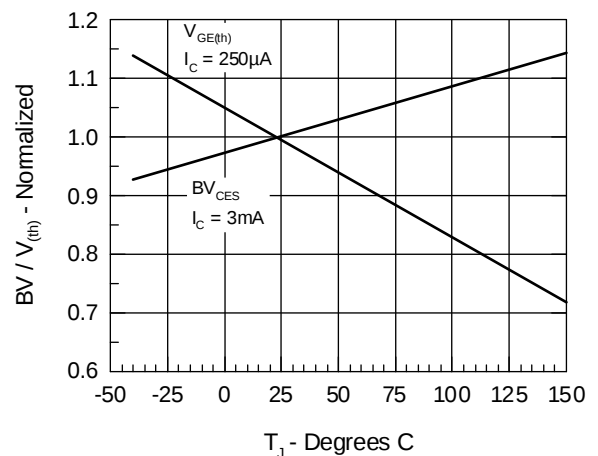
**Fig. 1 Saturation Characteristics**

**Fig. 2 Output Characteristics**

**Fig. 3 Collector-Emitter Voltage vs. Gate-Emitter Voltage**

**Fig. 4 Temperature Dependence of Output Saturation Voltage**

**Fig. 5 Input Admittance**

**Fig. 6 Temperature Dependence of Breakdown and Threshold Voltage**


Fig.7 Gate Charge

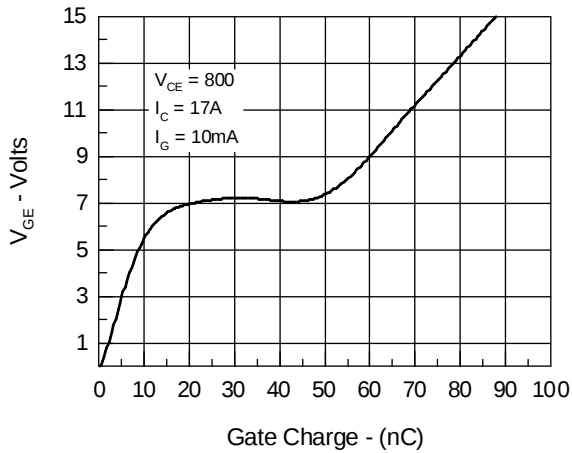


Fig.8 Turn-Off Safe Operating Area

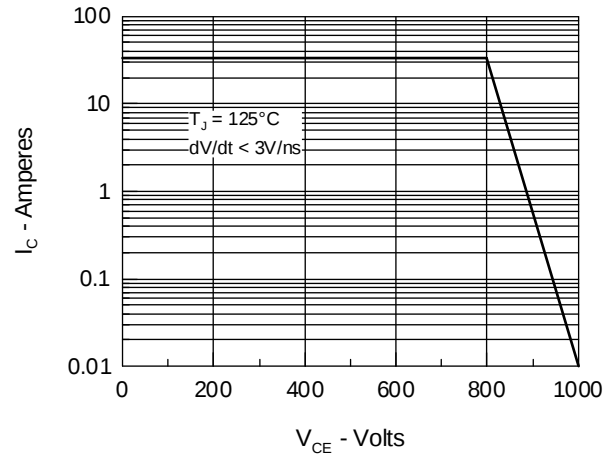


Fig.9 Capacitance Curves


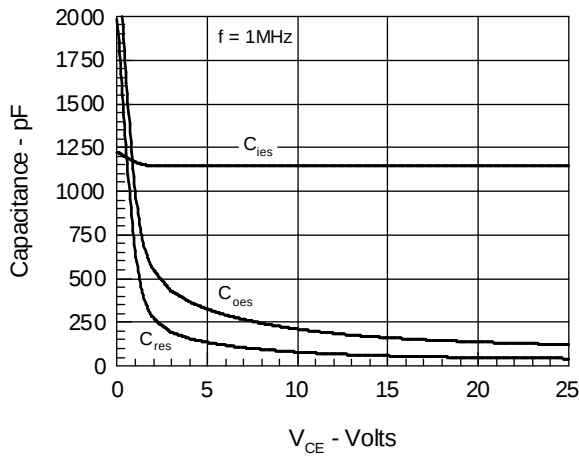


Fig.10 Transient Thermal Impedance

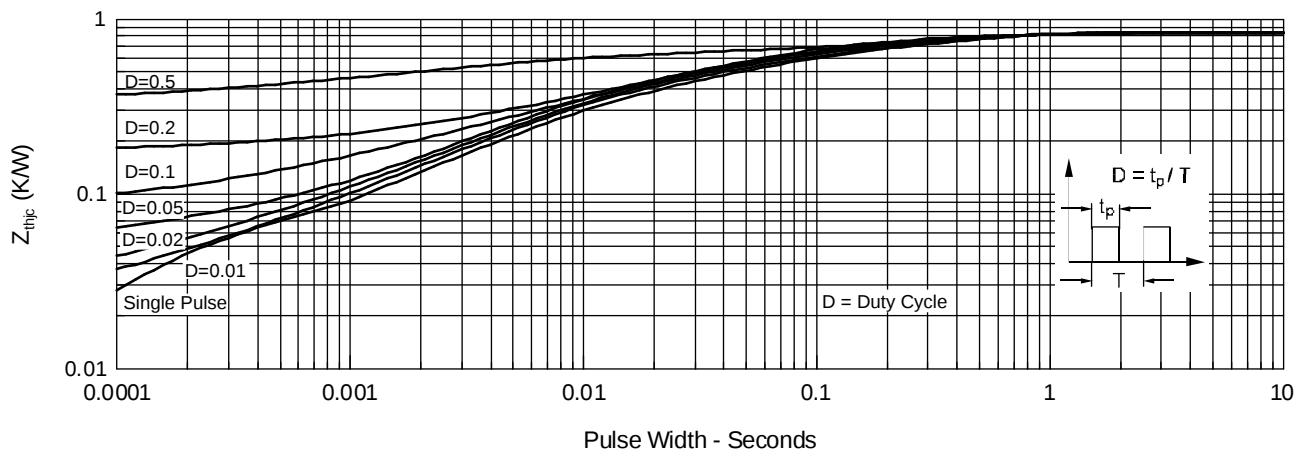

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETS and IGBTs are covered by one or more of the following U.S. patents:

|           |           |           |           |           |           |
|-----------|-----------|-----------|-----------|-----------|-----------|
| 4,835,592 | 4,881,106 | 5,017,508 | 5,049,961 | 5,187,117 | 5,486,715 |
| 4,850,072 | 4,931,844 | 5,034,796 | 5,063,307 | 5,237,481 | 5,381,025 |

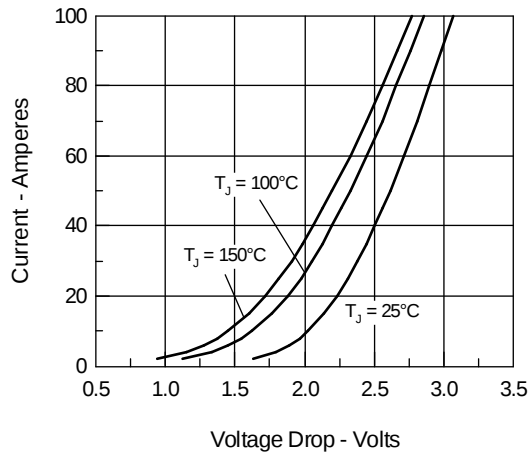
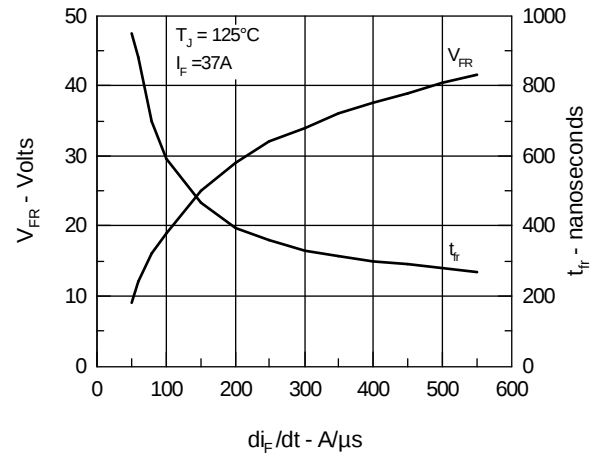
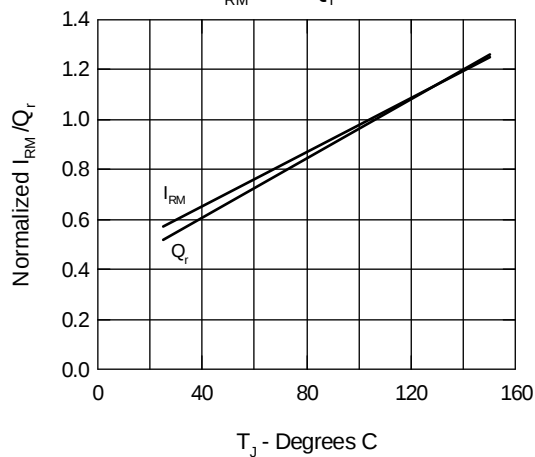
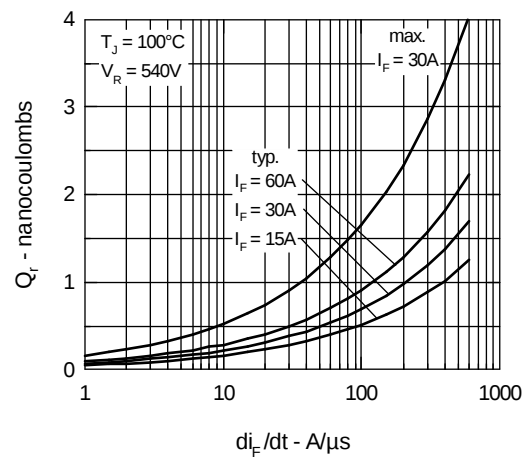
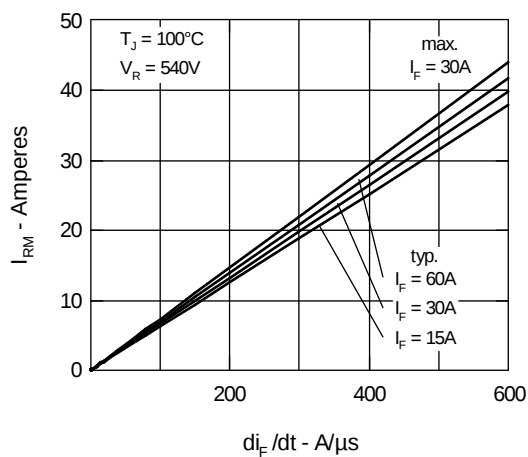
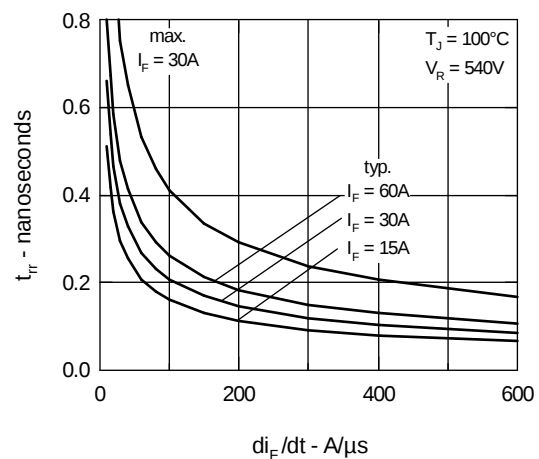
**Fig.11 Maximum Forward Voltage Drop**

**Fig.12 Peak Forward Voltage  $V_{FR}$  and Forward Recovery Time  $t_{FR}$** 

**Fig.13 Junction Temperature Dependence of  $I_{RM}$  and  $Q_r$** 

**Fig.14 Reverse Recovery Charge  $Q_r$** 

**Fig.15 Peak Reverse Recovery Current  $I_{RM}$** 

**Fig.16 Reverse Recovery Time  $t_{rr}$** 


Fig.17 Diode Transient Thermal resistance junction to case

