

VCSEL



KVCB1-8512

VCSEL, or Vertical Cavity Surface Emitting Laser, is semiconductor microlaser diode that emits light in a cylindrical beam vertically from the surface of a fabricated wafer.


FEATURES

- 850nm wavelength range
- High data rate $\geq 2.5\text{Gbps}$
- High reliability
- Low current and voltage
- Other configurations available on request

APPLICATIONS

- Fiber optic data links
- Proximity Sensors
- Encoders
- Laser range finders
- Laser printing
- Bar code scanning
- Optical storage

DIMENSIONS Unit:(mm)

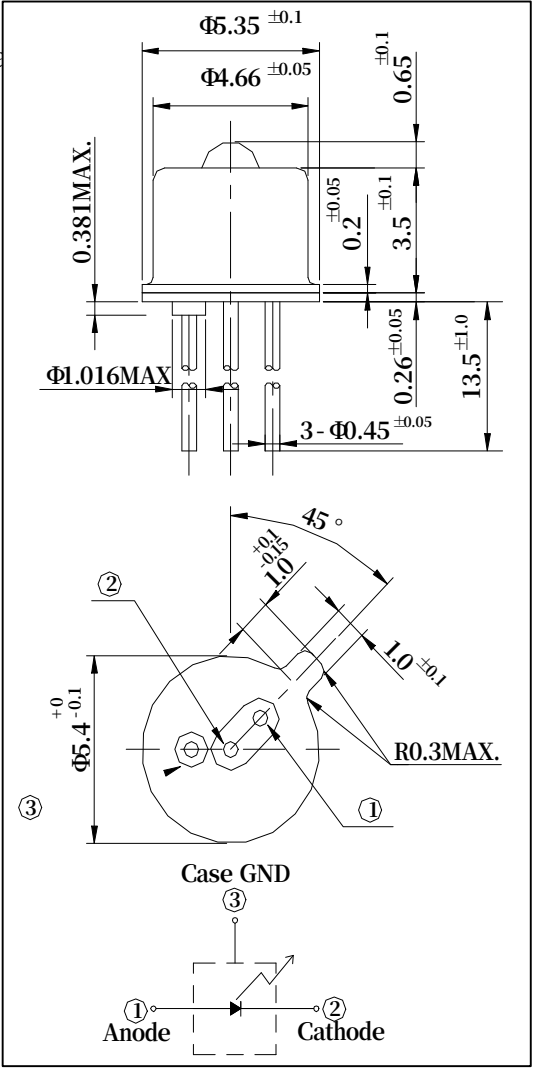


ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Ratings	Unit
Operating Temperature	$T_{opr.}$	$0 \sim +70$	$^{\circ}\text{C}$
Storage Temperature	$T_{stg.}$	$-40 \sim +100$	$^{\circ}\text{C}$
Lead Solder Temperature (10sec)	T_{sol}	260	$^{\circ}\text{C}$
Continuous Forward Current	I_F	10	mA
Continuous Reverse Voltage	V_R	5	V

KVCB1-8512

ELECTRO-OPTICAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
Threshold Current	I_{th}		1.5	3	mA	CW
I_{th} Temperature Variation	ΔI_{th}		1		mA	$T_a=0$ to 70°C
Slope Efficiency	η	0.3	0.5	0.7	mW/mA	$I_F=6\text{mA}$
η Temperature Coefficient	$\Delta\eta/\Delta T$		-0.5		%/ $^\circ\text{C}$	$T_a=0$ to 70°C at 6mA
Optical Output Power	P_o		2.5		mW	$I_F=6\text{mA}$
Peak Wavelength	λ_p	840	850	860	nm	$I_F=6\text{mA}$
λ_p Temperature Coefficient	$\Delta\lambda_p/\Delta T$		0.06		nm/ $^\circ\text{C}$	$T_a=0$ to 70°C at 6mA
Spectral Bandwidth	$\Delta\lambda$		0.5	0.85	nm	$I_F=6\text{mA}$
Beam Divergence	Θ	5	10	15	$^\circ$	$P_o=1.5\text{mW}$, Full Width, $1/e^2$
Forward Voltage	V_f		1.8	2.2	V	$I_F=6\text{mA}$
Breakdown Voltage	V_b		-10		V	
Dynamic Resistance	R_d	25	35	55	Ω	$I_F=6\text{mA}$

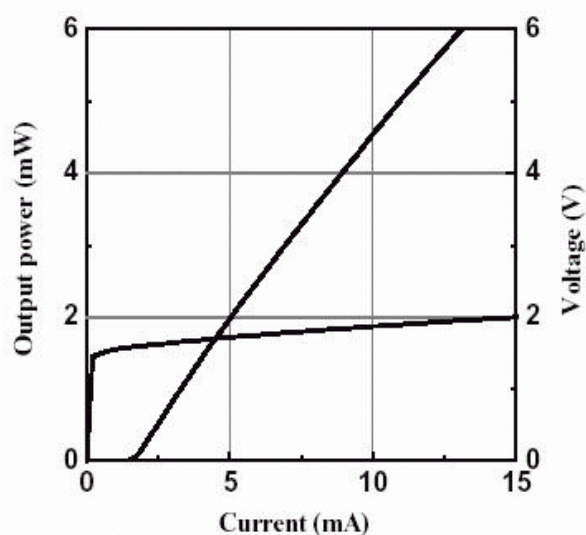L-I-V Curve2.5Gbps Eye Diagram