


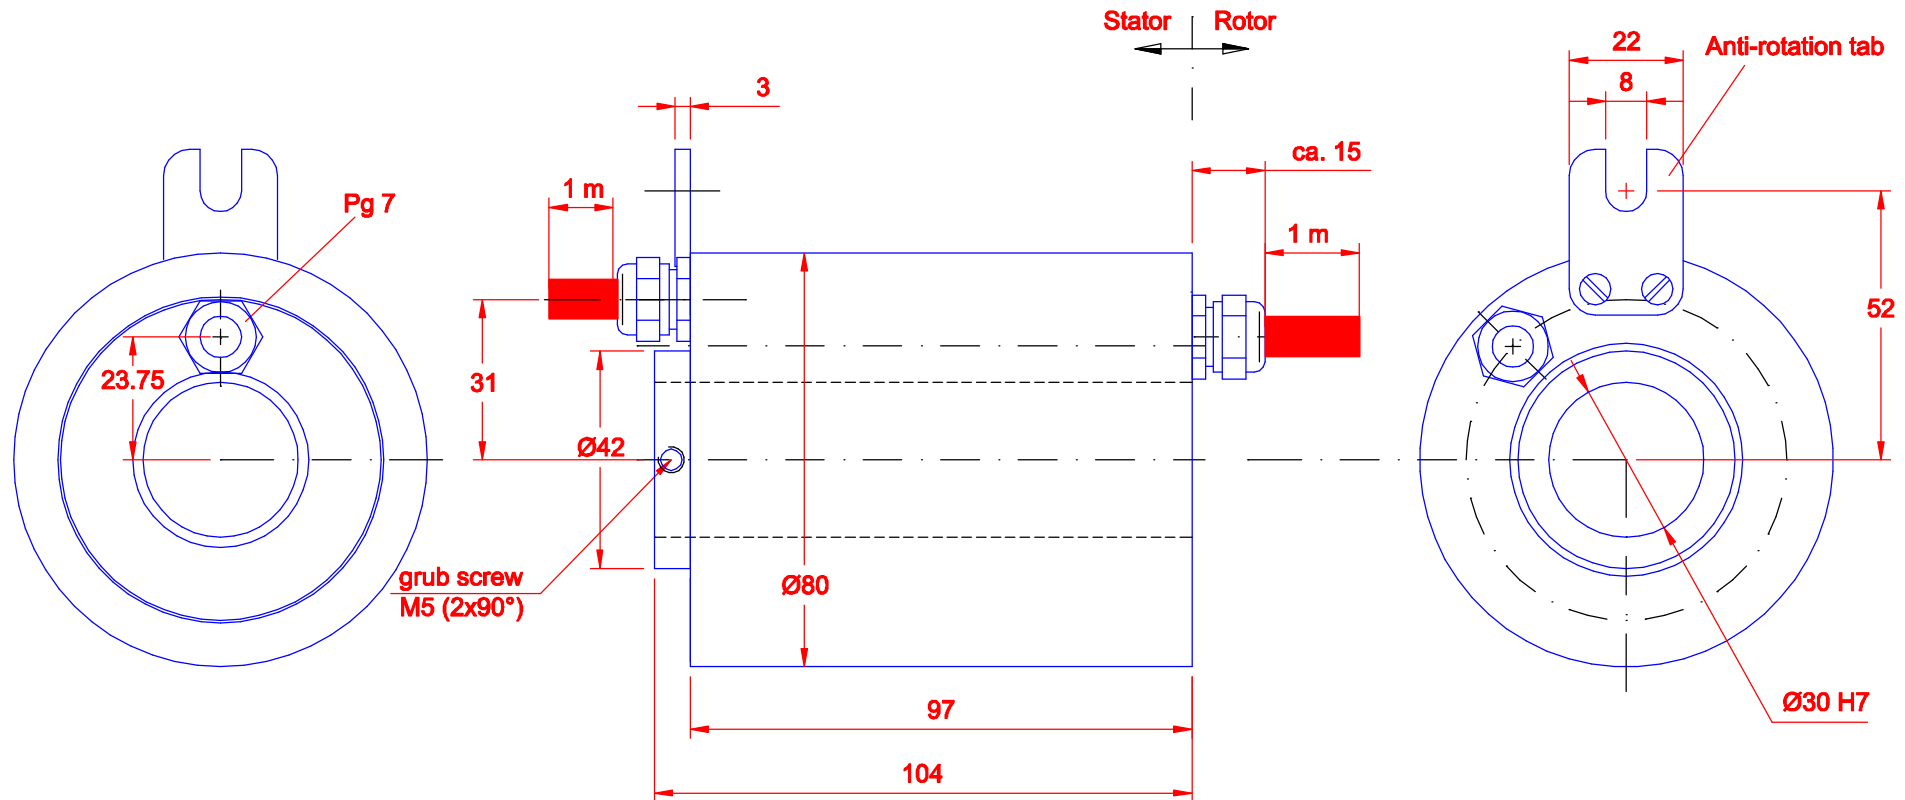

colours according to IEC 304

Nº of circuits: 14 x signal
Voltage max: 24 VDC
Current max. p. Ring: 2 A
R.P.M. max: 250
Protection Class: IP 54
Lead wires: 24 x AWG 26; L = 1 meter (cable: Ø 7.7)
Temperature Range: 0°C - 80°C

Oberflächenzustand:				Freimaßtoleranzen DIN 7168-m Formtoleranzen DIN 7184		Alu / PCGF30 Mat.-Nº:	
h)				Datum	Name	Slip ring capsule SC080-14/00-A01	
g)				Bearb.	15.12.05 Piederstorfer		
f)				Gepr.	15.12.05 Piederstorfer		
e)				Norm		Zeichnungs-Nº: SC080-14/00-A01 EDV-Nº: 4924908	
d)				Kom.-Nº:			
c)							
b)						LTN LTN Servotechnik GmbH	
a)							
Zust.	Änderung	Datum	Name	Datei: SC080-14-00-A01.dwg			DXF: 15.12.05