Extract from the online catalog

PST 1,3/ 4-LV-5,0

Order No.: 1704482

The figure shows a 10-position version of the product

http://eshop.phoenixcontact.net/phoenix/treeViewClick.do?UID=1704482

Header, Nominal current: 14 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 4, Color: black, Assembly: Soldering

Commercial data	
EAN	4017918995089
Pack	250 pcs.
Customs tariff	85366990
Weight/Piece	0.00148 KG
Catalog page information	Page 477 (CC-2009)

Product notes

WEEE/RoHS-compliant since: 07/02/2007

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Length	10.8 mm
Pitch	5 mm
Dimension a	15 mm
Number of positions	4
Pin dimensions	1,3 mm

Hole diameter	1.5 mm

Technical data

Insulating material group	IIIb
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	400 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	13.5 A (depends on the plug used)
Nominal voltage U_N	250 V
Maximum load current	13.5 A (depends on the plug used)
Insulating material	PA
Inflammability class acc. to UL 94	V0

Certificates / Approvals

Certification	CUL, UL

CUL

Nominal voltage U_N	300 V
Nominal current I_N	10 A

UL

Nominal voltage U_N	300 V
Nominal current I_N	10 A

Diagrams/Drawings

Drilling plan/solder pad geometry

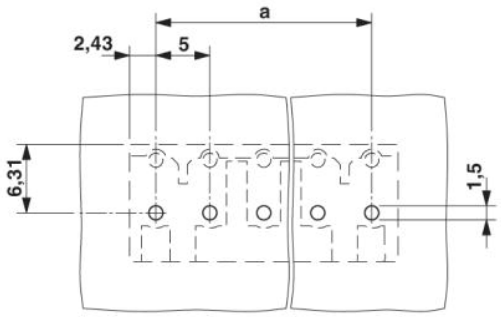

Dimensioned drawing

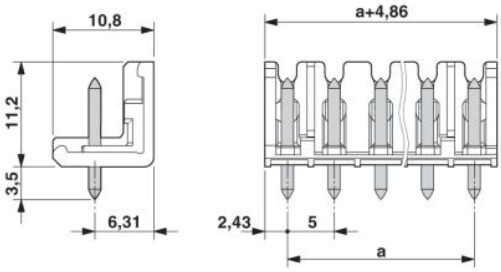

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg,Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
http://www.phoenixcontact.com

© 2010 Phoenix Contact
Technical modifications reserved;