

MAP110 SERIES


Power-One's MAP110 series of power supplies combines low cost and universal input in a board-only power solution to meet commercial and industrial requirements. Full international safety, EMI, and ESD compliance ensure world-wide acceptance. All units bear the CE Mark.

Wide dynamic output current and fixed frequency operation simplifies system level operation. The MAP110 series is configured to an international standard footprint. Input and output connections are made via popular single-row Molex connectors.

Single output models feature wide-range output adjustability to meet a wide variety of standard and user specific output voltage requirements.

FEATURES

- New 3.3V and 5V Output Models
- Universal Input 85-264 VAC
- Industry Standard Footprint: 7.00" x 4.30" x 1.97" (177.8mm x 109.2mm x 50.0mm)
- Input Transient & ESD Compliance to EN61000-4-2/-3/-4
- Greater than 134,000 Hours MTBF
- Remote Sense and Over-Voltage Protection on Single Output Units and Main Output of Multiple Output Units
- Options Include Over-Temperature Protection, Power Fail Signal, Chassis & Cover

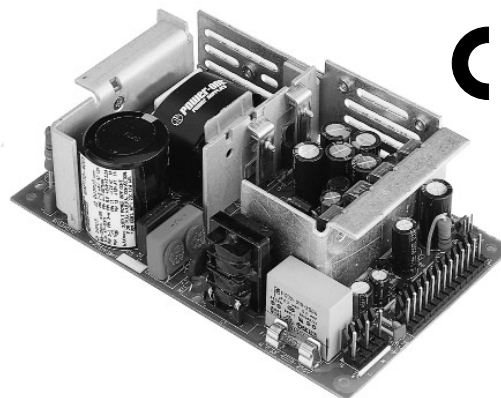

SINGLE OUTPUT MODEL SELECTION CHART

| MODEL | OUTPUT VOLTAGE | ADJUSTMENT RANGE | CONVECTION COOLED OUTPUT CURRENT | FORCED AIR OUTPUT CURRENT | LINE REGULATION | LOAD REGULATION | RIPPLE & NOISE %p-p (NOTE 1) | INITIAL SETTING ACCURACY |
|--------------------|----------------|------------------|----------------------------------|---------------------------|-----------------|-----------------|------------------------------|--------------------------|
| MAP110-1005 | 5V | 4.95V to 5.50V | 16A | 22A | 0.2% | 1% | 1% | 5.09V to 5.11V |
| MAP110-1012 | 12V/15V | 11.25V to 15.75V | 7.5/6A (Note 2) | 10/8A (Note 2) | 0.1% | 0.5% | 1% | 11.97V to 12.02V |
| MAP110-1024 | 24V/28V | 22.8V to 29.2V | 3.8/3.2A (Note 2) | 5.0/4.3A (Note 2) | 0.1% | 0.5% | 1% | 23.95V to 24.05V |

NOTES: 1) Maximum peak-to-peak noise expressed as a percentage of output voltage, 20 MHz bandwidth.

2) MAP110-1012 output currents are expressed as 12V/15V operation. MAP110-1024 output currents are expressed as 24V/28V operation.

MULTIPLE OUTPUT MODEL SELECTION CHART – 80W CONVECTION COOLED, 110W FORCED AIR COOLED (200 LFM)

| MODEL | OUTPUT VOLTAGE | ADJUSTMENT RANGE | CONVECTION COOLED CURRENT (NOTE 1) | FORCED AIR CURRENT | LINE REGULATION | LOAD REGULATION | RIPPLE & NOISE %p-p (NOTE 2) | INITIAL SETTING ACCURACY |
|--------------------|----------------|------------------|------------------------------------|--------------------|-----------------|-----------------|------------------------------|--------------------------|
| MAP110-4000 | +5V | 4.75V to 5.25V | 12A/20A PK | 12A/20A PK | 0.2% | 0.5% | 1% | 5.09V to 5.11V |
| | +12V | Fixed | 5A/9A PK | 5A/9A PK | 0.2% | 1% | 1% | 11.97V to 12.03V |
| | -12V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.2% | 1% | 1% | -11.4V to -12.6V |
| | -5V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.2% | 1.5% | 1% | -4.75V to -5.25V |
| MAP110-4001 | +5V | 4.75V to 5.25V | 12A/20A PK | 12A/20A PK | 0.2% | 0.5% | 1% | 5.09V to 5.11V |
| | +24V | Fixed | 3A/4.5A PK | 3A/4.5A PK | 0.1% | 1% | 1% | 23.94V to 24.06V |
| | -12V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | -11.4V to -12.6V |
| | +12V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | 11.4V to 12.6V |
| MAP110-4002 | +5V | 4.75V to 5.25V | 12A/20A PK | 12A/20A PK | 0.2% | 0.5% | 1% | 5.09V to 5.11V |
| | +12V | Fixed | 5A/9A PK | 5A/9A PK | 0.1% | 1% | 1% | 11.97V to 12.03V |
| | -12V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | -11.4V to -12.6V |
| | +12V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | 11.4V to 12.6V |
| MAP110-4003 | +5V | 4.75V to 5.25V | 12A/20A PK | 12A/20A PK | 0.2% | 0.5% | 1% | 5.09V to 5.11V |
| | +15V | Fixed | 5A/7.3A PK | 5A/7.3A PK | 0.1% | 1% | 1% | 14.96V to 15.04V |
| | -15V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | -14.3V to -15.7V |
| | -5V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.2% | 1.5% | 1% | -4.75V to -5.25V |
| MAP110-4004 | +5V | 4.75V to 5.25V | 12A/20A PK | 12A/20A PK | 0.2% | 0.5% | 1% | 5.09V to 5.11V |
| | +24V | Fixed | 3A/4.5A PK | 3A/4.5A PK | 0.1% | 1% | 1% | 23.94V to 24.06V |
| | -15V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | -14.3V to -15.7V |
| | +15V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | 14.3V to 15.7V |

MAP110 SERIES

MULTIPLE OUTPUT MODEL SELECTION CHART (CONT.) – 80W CONVECTION COOLED, 110W FORCED AIR COOLED (200 LFM)

| MODEL | OUTPUT VOLTAGE | ADJUSTMENT RANGE | CONVECTION COOLED CURRENT (NOTE 1) | FORCED AIR CURRENT | LINE REGULATION | LOAD REGULATION | RIPPLE & NOISE %p-p (NOTE 2) | INITIAL SETTING ACCURACY |
|--------------------------------|----------------|------------------|------------------------------------|--------------------|-----------------|-----------------|------------------------------|--------------------------|
| MAP110-4010 | +5V | 4.75V to 5.25V | 12A/20A PK | 12A/20A PK | 0.2% | 0.5% | 1% | 5.09V to 5.11V |
| | +12V | Fixed | 5A/9A PK | 5A/9A PK | 0.1% | 2% | 1% | 11.97V to 12.03V |
| | -5V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.2% | 1.5% | 1% | -4.75V to -5.25V |
| | -12V | Fixed | 3A/4A PK | 3A/4A PK | 0.3% | 8% | 1% | -11.5V to -12.5V |
| MAP110-4011 | +5V | 4.75V to 5.25V | 12A/20A PK | 12A/20A PK | 0.2% | 0.5% | 1% | 5.09V to 5.11V |
| | +12V | Fixed | 5A/9A PK | 5A/9A PK | 0.1% | 1% | 1% | 11.97V to 12.03V |
| | -12V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | -11.4V to -12.6V |
| | +24V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | 23.2V to 24.8V |
| MAP110-4015 | +5V | 4.75V to 5.25V | 12A/20A PK | 12A/20A PK | 0.2% | 0.5% | 1% | 5.09V to 5.11V |
| | +12V | Fixed | 5A/9A PK | 5A/9A PK | 0.1% | 1% | 1% | 11.97V to 12.03V |
| | -15V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | -14.4V to -15.6V |
| | +15V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | 14.4V to 15.6V |
| MAP110-4200 | +12V | 11.55V to 12.45V | 5A/9A PK | 5A/9A PK | 0.2% | 0.5% | 0.5% | 11.96V to 12.03V |
| | +24V | Fixed | 4A/4.5A PK | 4A/4.5A PK | 0.2% | 1% | 1% | 23.94V to 24.06V |
| | -12V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.2% | 1% | 1% | -11.4V to -12.6V |
| | +5V | Fixed | 2A/2.5A PK | 2A/2.5A PK | 0.2% | 1.5% | 1% | 4.75V to 5.25V |
| New MAP110-4300 (Note 3) | +3.3V | 3.2V to 3.4V | 12A/20A PK | 15A/20A PK | 0.3% | 0.7% | 1% | 3.29V to 3.31V |
| | +5V | Fixed | 5A/12A PK | 8A/12A PK | 0.2% | 1% | 1% | 4.98V to 5.02V |
| | -12V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | -11.4V to -12.6V |
| | +12V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | 11.4V to 12.6V |
| New MAP110-4305 (Note 3) | +3.3V | 3.2V to 3.4V | 12A/15A PK | 15A/20A PK | 0.3% | 0.7% | 1% | 3.29V to 3.31V |
| | +5V | Fixed | 5A/12A PK | 8A/12A PK | 0.2% | 1% | 1% | 4.98V to 5.02V |
| | -5V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | -4.75V to -5.25V |
| | +12V | Fixed | 1A/1.5A PK | 1A/1.5A PK | 0.1% | 1% | 1% | 11.4V to 12.6V |

NOTES: 1) Peak loads up to 110 Watts for 60 seconds or less are acceptable, (10% duty cycle max.). Peak power must not exceed 110 Watts.
2) Maximum peak-to-peak noise expressed as a percentage of output voltage, 20 MHz bandwidth.
3) Sum of the output currents of V1 + V2 may not exceed 15A continuous, 22A peak.

MAXIMUM OUTPUT RATING:

| MODEL/OUTPUT OPTION | MULTIPLE OUTPUT BOARD ONLY | SINGLE OUTPUT BOARD ONLY | MULTIPLE OUTPUT 'L'-BRACKET | SINGLE OUTPUT 'L'-BRACKET | MULTIPLE OUTPUT 'C'-COVER | SINGLE OUTPUT 'C'-COVER |
|----------------------------|----------------------------|--------------------------|-----------------------------|---------------------------|---------------------------|-------------------------|
| CONVECTION CONTINUOUS/PEAK | 80W/110W | 90W/120W | 80W/110W | 90W/120W | 60W/110W | 65W/120W |
| FORCED AIR 200 LFM | 110W | 120W | 110W | 120W | 110W | 120W |

INPUT SPECIFICATIONS

| PARAMETER | CONDITIONS/DESCRIPTION | MIN | NOM | MAX | UNITS |
|----------------------|--|-----|------------------|------------|-------|
| Input Voltage - AC | Continuous input range. | 85 | | 264 | VAC |
| Input Frequency | AC input. | 47 | | 63 | Hz |
| Brown Out Protection | Lowest AC input voltage that regulation is maintained with full rated loads. | 85 | | | VAC |
| Hold-up Time | Nominal AC input voltage (110 VAC) | 40 | 50% load: | | mS |
| | | 20 | Full rated load: | | |
| Input Current | 85 VAC (110W load). 110VAC (110W load). | | | 3.5 2.8 | ARMS |
| Input Protection | Non-user serviceable internally located AC input line fuse. | | | | |
| Inrush Surge Current | Internally limited by thermistor. Vin = 264 VAC (one cycle). 25°C. | | | 41 | APK |
| Operating Frequency | Switching frequency of main transformer, (fixed frequency). | 20 | | 25 | kHz |

MAP110 SERIES

OUTPUT SPECIFICATIONS

| PARAMETER | CONDITIONS/DESCRIPTION | MIN | NOM | MAX | UNITS |
|------------------------|---|--------|----------------------------|----------------------------|----------------|
| Efficiency | Full load, 230 VAC. Varies with distribution of loads among outputs. | 65 | 75 | 80 | % |
| Minimum Loads | Single output models. Multiple output models, V1 + V2 (Note 1). | 0 1 | | | Amps Amps |
| Ripple and Noise | Full Load, 20 MHz Bandwidth. | | See Model Selection Chart. | | |
| Output Power | Multiple output units with convection cooling. Multiple output units with 200 LFM forced air cooling. | 5 5 | | 80 110 | Watts Watts |
| Overshoot / Undershoot | Output voltage overshoot/undershoot at turn-on. | | | 0 | V |
| Regulation | Varies by output, regulation includes: line changes from 90-132 VAC or 175-264, changes in load starting at 20% load and changing to 100% load. | | | See Model Selection Chart. | |
| Transient Response | Recovery time, to within 1% of initial set point due to a 50-100% load change, 4% max. deviation. (Main output only on multiple output units). | | 500 | | μS |
| Turn-on Delay | Time required for initial output voltage stabilization. | | | 1 | Sec |
| Turn-on Rise Time | Time required for output voltage to rise from 10% to 90%. | | | 20 | mS |

INTERFACE SIGNALS AND INTERNAL PROTECTION

| PARAMETER | CONDITIONS/DESCRIPTION | MIN | NOM | MAX | UNITS |
|----------------------------|--|--|---|--|-------|
| Overvoltage Protection | Provided on single output models and the main output of multiple output models. | MAP110-1005 MAP110-1012 MAP110-1024 MAP110-4200 MAP110-4300 All other models. | 6.10 17.3 32.2 13.8 3.7 5.75 | 7.20 20.2 37.8 16.2 4.35 6.75 | V |
| Overload Protection | Fully protected against output overload and short circuit. Automatic recovery upon removal of overload condition. | | 150 | 200 | % |
| Remote Sense | Voltage drop compensated for at the load. | | | 250 | mV |
| Input Power Fail Warning | Option, TTL compatible logic signal. Time before regulation dropout due to loss of input power at 110 VAC. Active low. | 3 | 5 | | mS |
| Overtemperature Protection | Option, system shutdown due to excessive internal temperature. | | | | |

SAFETY, REGULATORY, AND EMI SPECIFICATIONS

| PARAMETER | CONDITIONS/DESCRIPTION | MIN | NOM | MAX | UNITS |
|---|---|------|-------------|-----|-------|
| Agency Approvals | UL1950. CSA 22.2 No. 234/950. EN60950 (TUV). | | Approved. | | |
| Dielectric Withstand Voltage | Input to Output. | 2600 | | | VDC |
| Electromagnetic Interference, Conducted | FCC CFR title 47 part 15 sub-part B - conducted & radiated. EN55022 / CISPR 22 conducted. EN55022 / CISPR 22 radiated (Note 2). | | B B A | | Class |
| Input Transient Protection | EN61000-4-5 level 3. | 2 | | | kV |
| Insulation Resistance | Input to output. | 10 | | | MΩ |
| Leakage Current | Per EN60950, 264 VAC. | | | 750 | μA |

NOTES: 1) Minimum load is required only to meet the regulation limits of V3 and V4. If V3 and V4 are unused, no minimum load is necessary.

2) The following units meet Class B: MAP110-1005, MAP110-4000/4011/4015/4200/4300.

MAP110 SERIES

ENVIRONMENTAL SPECIFICATIONS

| PARAMETER | CONDITIONS/DESCRIPTION | MIN | NOM | MAX | UNITS |
|-------------------------|---|---------------|-------|-------|---------|
| Altitude | Operating. | | | 10k | ASL Ft. |
| | Non-operating. | | | 50k | ASL Ft. |
| Operating Temperature | Derate linearly above 50°C by 2.5% per° C to a maximum temperature of 70°C. | At 100% load: | 0 | 50 | °C |
| | | At 50% load: | 0 | 70 | °C |
| Storage Temperature | | -55 | | 85 | °C |
| Temperature Coefficient | 0°C to 70°C. | | ±0.03 | ±0.05 | %/°C |
| Relative Humidity | Non-condensing. | | | 95 | %RH |

OPTIONS

| DESCRIPTION | NOTES | DIMENSIONS |
|-------------------|---|---|
| L-Bracket | Add 'L' suffix to model number. | 7.15" x 4.50" x 2.40" (182.0mm x 115.0mm x 61.0mm) |
| Cover | Add 'C' suffix to model number. Includes L-Bracket. | 7.20" x 4.50" x 2.40" (183.0mm x 115.0mm x 61.0mm) |
| Power Fail Signal | Add 'P' suffix to model number. Provides >5 mS typical warning time before main output drops 5%. Warning time increases at reduced load levels. | N/A |
| Thermal Shutdown | Add 'T' suffix to model number. Initiates shut-down in the event of an overtemperature condition. Automatic recovery. | N/A |

For the Most Up-To-Date Information

www.power-one.com

24 Hours/Day—7 Days/Week


NUCLEAR AND MEDICAL APPLICATIONS Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the President of Power-One, Inc.

TECHNICAL REVISIONS The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

MAP110 SERIES

OVERALL SIZE: 7.00" X 4.30" X 1.97" (177.8mm x 109.2mm x 50.0mm)

OVERALL WEIGHT: 1.3 LBS (0.59 kg)

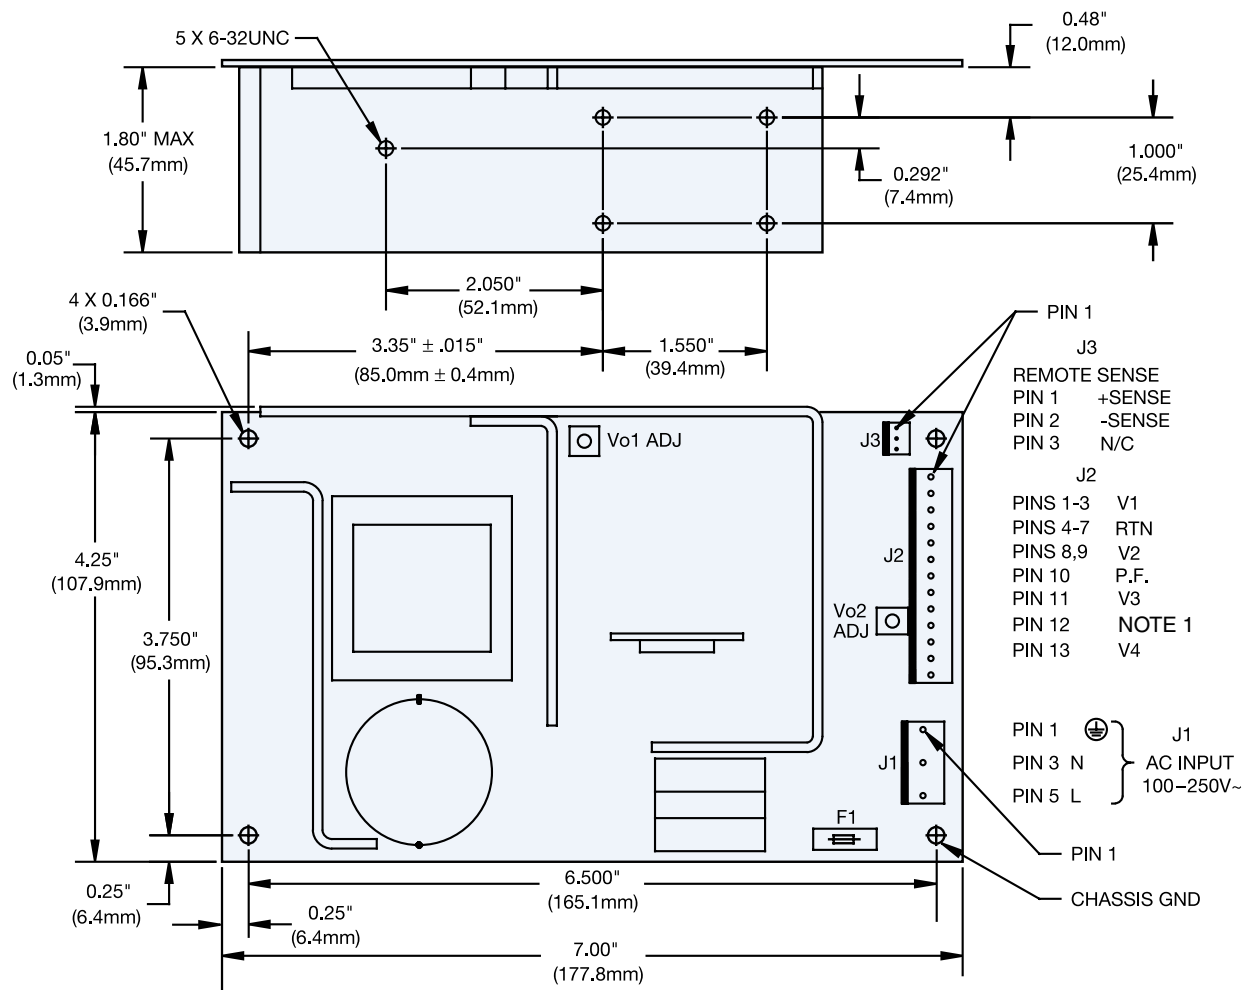

| MOLEX PCB PIN CONNECTOR INFORMATION | | | | |
|-------------------------------------|----------|-------------|--------------|--------------|
| REF DESIG | SERIES | MOLEX P/N | SPACING | PINS, SQUARE |
| J1 | 41671 or | 26-48-1055* | 0.156 (3.96) | 0.045 (1.14) |
| | 41791 | 26-60-4050* | 0.156 (3.96) | 0.045 (1.14) |
| J2 | 41671 or | 26-48-1135 | 0.156 (3.96) | 0.045 (1.14) |
| | 41791 | 26-60-4130 | 0.156 (3.96) | 0.045 (1.14) |
| J3 | 6373 | 22-23-2031 | 0.100 (2.54) | 0.025 (0.64) |

*With pins 2 & 4 removed for double spacing.

NOTES:

1.) When the V4 output is a positive (+) output, pin 12 on J2 is connected to RTN.

When the V4 output is a negative (-) output, pin 12 on J2 is connected to V4.

Contact factory for dimensions for L-bracket and cover.