



PSD03
thru
PSD24C

STANDARD TVS COMPONENTS

APPLICATIONS

- ✓ Laptop Computers
- ✓ Cellular Phones
- ✓ Digital Cameras
- ✓ Personal Digital Assistants (PDAs)

IEC COMPATIBILITY (EN61000-4)

- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 24A, 8/20 μ s - Level 2(Line-Gnd) & Level 3(Line-Line)

FEATURES

- ✓ 500 Watts Peak Pulse Power per Line($t_d = 8/20\mu$ s)
- ✓ Unidirectional & Bidirectional Configurations
- ✓ Replacement for MLV (0805)
- ✓ Protects One Power or I/O Port
- ✓ Available in Multiple Voltages Ranging From 3.0V to 24.0V
- ✓ ESD Protection > 40 kilovolts
- ✓ Low Clamping Voltage


MECHANICAL CHARACTERISTICS

- ✓ Molded JEDEC SOD-323
- ✓ Weight 10 milligrams (Approximate)
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Tape and Reel Per EIA Standard 481-1-A
- ✓ Device Marking: Marking Code & Polarity Band (*Unidirectional Only*)




CIRCUIT DIAGRAMS

UNIDIRECTIONAL



BIDIRECTIONAL



DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ($t_d = 8/20\mu s$) - See Figure 1	P_{PP}	500	Watts
Operating Temperature	T_J	-55°C to 150°C	°C
Storage Temperature	T_{STG}	-55°C to 150°C	°C

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (See Notes 1-2)	DEVICE MARKING	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_p = 1A$ V_C VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ 8/20 μs $V_C @ I_{PP}$	MAXIMUM LEAKAGE CURRENT @ V_{WM} I_D μA	TYPICAL CAPACITANCE 0V @ 1 MHz C pF
PSD03	A	3.3	4.0	6.5	10.9V @ 43.0A	125	500
PSD03C	G	3.3	4.0	7.0	10.9V @ 39.0A	125	200
PSD05	B	5.0	6.0	9.8	13.5V @ 42.0A	10	350
PSD05C	H	5.0	6.0	9.8	14.5V @ 28.0A	10	175
PSD08	C	8.0	8.5	13.4	16.9V @ 34.0A	10	250
PSD08C	J	8.0	8.5	13.4	18.5V @ 17.0A	10	150
PSD12	D	12.0	13.3	19.0	25.9V @ 21.0A	1	150
PSD12C	K	12.0	13.3	19.0	29.5V @ 14.0A	1	50
PSD15	E	15.0	16.7	24.0	30.0V @ 17.0A	1	100
PSD15C	L	15.0	16.7	24.0	33.0V @ 12.0A	1	40
PSD24	F	24.0	26.7	43.0	49.0V @ 12.0A	1	88
PSD24C	M	24.0	26.7	43.0	46.2V @ 9.0A	1	40

Note 1: Part numbers with an additional "C" suffix are bidirectional devices, i.e., PSD05C.

Note 2: For Bidirectional Devices Only: Electrical characteristics apply in both directions.

FIGURE 1
PEAK PULSE POWER VS PULSE TIME




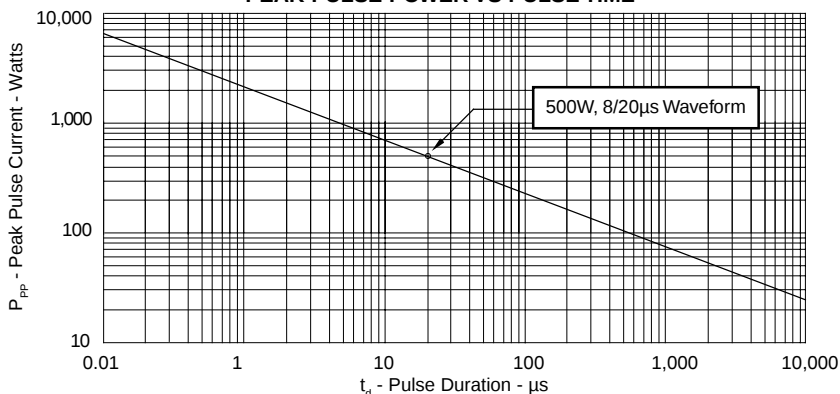



FIGURE 2
PULSE WAVE FORM

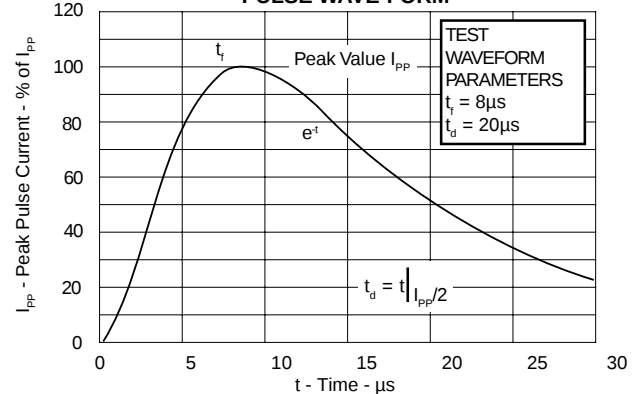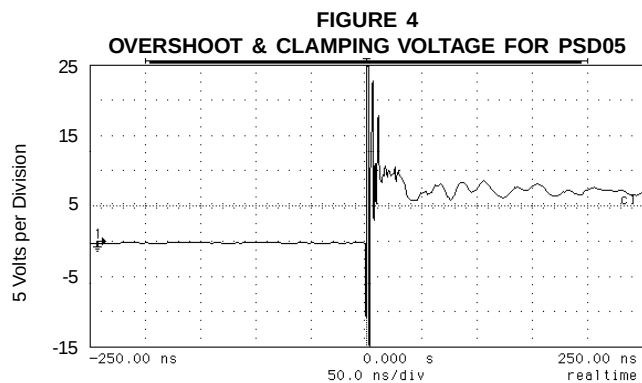



GRAPHS

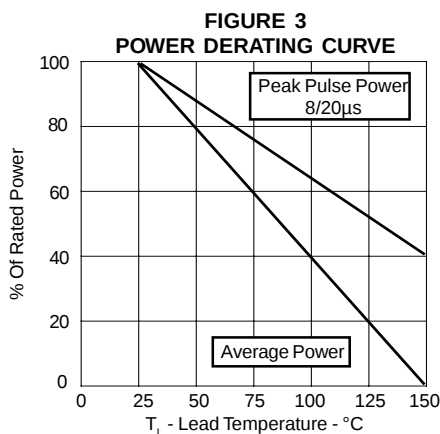

ESD Test Pulse: 5 kilovolt, 1/30ns (waveform)

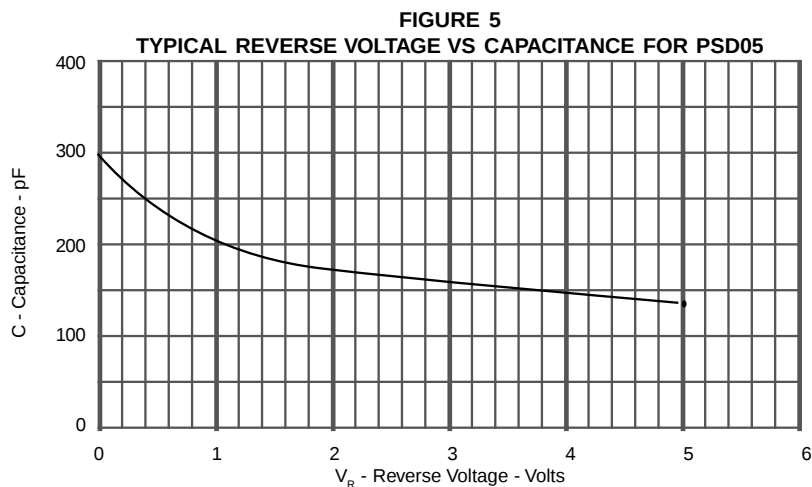

PACKAGE OUTLINE & DIMENSIONS

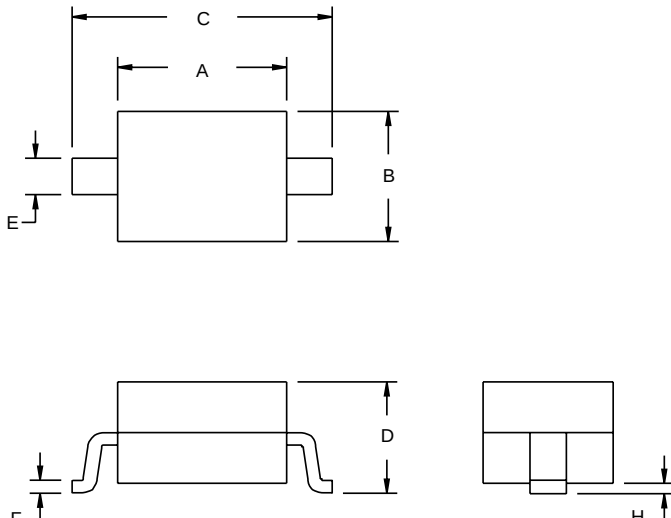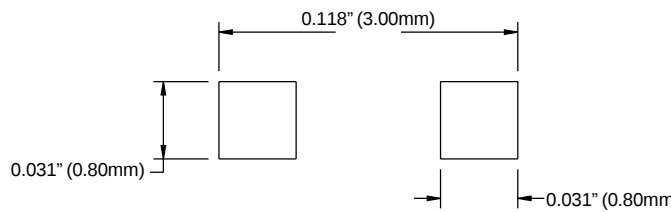PACKAGE OUTLINE 	SOD-323 PACKAGE  <table><tr><th colspan="5">PACKAGE DIMENSIONS</th></tr><tr><th rowspan="2">DIM</th><th colspan="2">MILLIMETERS</th><th colspan="2">INCHES</th></tr><tr><th>MIN</th><th>MAX</th><th>MIN</th><th>MAX</th></tr><tr><td>A</td><td>1.60</td><td>1.90</td><td>0.063</td><td>0.075</td></tr><tr><td>B</td><td>1.15</td><td>1.45</td><td>0.045</td><td>0.057</td></tr><tr><td>C</td><td>2.39</td><td>2.70</td><td>0.094</td><td>0.106</td></tr><tr><td>D</td><td>0.92</td><td>1.10</td><td>0.036</td><td>0.043</td></tr><tr><td>E</td><td>0.25</td><td>0.40</td><td>0.010</td><td>0.016</td></tr><tr><td>F</td><td>0.10</td><td>0.20</td><td>0.004</td><td>0.008</td></tr><tr><td>H</td><td>-</td><td>0.10</td><td>-</td><td>0.004</td></tr></table>	PACKAGE DIMENSIONS					DIM	MILLIMETERS		INCHES		MIN	MAX	MIN	MAX	A	1.60	1.90	0.063	0.075	B	1.15	1.45	0.045	0.057	C	2.39	2.70	0.094	0.106	D	0.92	1.10	0.036	0.043	E	0.25	0.40	0.010	0.016	F	0.10	0.20	0.004	0.008	H	-	0.10	-	0.004
PACKAGE DIMENSIONS																																																		
DIM	MILLIMETERS		INCHES																																															
	MIN	MAX	MIN	MAX																																														
A	1.60	1.90	0.063	0.075																																														
B	1.15	1.45	0.045	0.057																																														
C	2.39	2.70	0.094	0.106																																														
D	0.92	1.10	0.036	0.043																																														
E	0.25	0.40	0.010	0.016																																														
F	0.10	0.20	0.004	0.008																																														
H	-	0.10	-	0.004																																														
MOUNTING PAD 	NOTES: 1. Controlling Dimensions in Millimeters. 2. Dimensions are exclusive of mold flash and metal burrs. 06010 Rev 1 - 11/01																																																	

TAPE & REEL PACKAGING:

Surface mount product is taped and reeled in accordance with EIA-481, reel quantities and sizes are as follows:

7 Inch Reel - 3,000 pieces per reel; 13 Inch Reel - Not Available

ProTek Devices
2929 South Fair Lane, Tempe, AZ 85282
Tel: 602-431-8101 Fax: 602-431-2288
E-Mail: sales@protekdevices.com
Web Site: www.protekdevices.com

COPYRIGHT © ProTek Devices 2001

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.