

150mA DUAL LDO REGULATOR WITH SEQUENCE CONTROL

NO. EA-200-111020

OUTLINE

The RP152x Series are CMOS-based voltage regulator ICs with high output voltage accuracy, low supply current, low dropout, and high ripple rejection. Each of these voltage regulator ICs consists of a voltage reference unit, an error amplifier, resistors for setting Output Voltage, a current limit circuit, and a chip enable circuit. Moreover, in C Version of RP152x, the start-up sequence circuit is built-in.

These ICs perform with low dropout voltage due to built-in transistor with low ON resistance, and a chip enable function prolongs the battery life of each system. The line transient response and load transient response of the RP152x Series are excellent, thus these ICs are very suitable for the power supply for hand-held communication equipment.

The output voltage of these ICs is internally fixed with high accuracy. Since the packages for these ICs are SOT-23-6 and DFN1212-6, dual LDO regulators are included in each package are high density mounting of the ICs on boards is possible.




FEATURES

- Supply Current Typ. 40 μ A $\times$ 2 (VR1&VR2)
- Standby Current Typ. 0.1 μ A $\times$ 2 (VR1&VR2)
- Ripple Rejection Typ. 70dB (f=1kHz)
- Input Voltage Range 1.4V to 5.25V
- Output Voltage Range 0.8V to 3.6V (0.1V steps)
(For details, please refer to MARK INFORMATION.)
- Output Voltage Accuracy $\pm 1.0\%$ ($V_{OUT} > 2.0V$, $T_{opt} = 25^{\circ}C$)
- Temperature-Drift Coefficient of Output Voltage Typ. $\pm 80ppm/^{\circ}C$
- Dropout Voltage Typ. 0.22V ($I_{OUT} = 150mA$, $V_{OUT} = 2.8V$)
- Line Regulation Typ. 0.02%/V
- Packages DFN1212-6, SOT-23-6
- Built-in Fold Back Protection Circuit Typ. 40mA
- Ceramic capacitors are recommended to be used with this IC 0.22 μ F or more

APPLICATIONS

- Power source for portable communication equipment.
- Power source for electrical appliances such as cameras, VCRs and camcorders.
- Power source for battery-powered equipment.

BLOCK DIAGRAMS

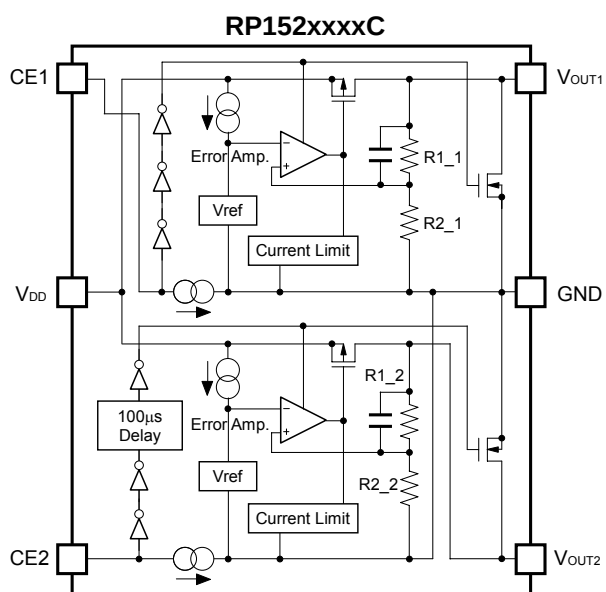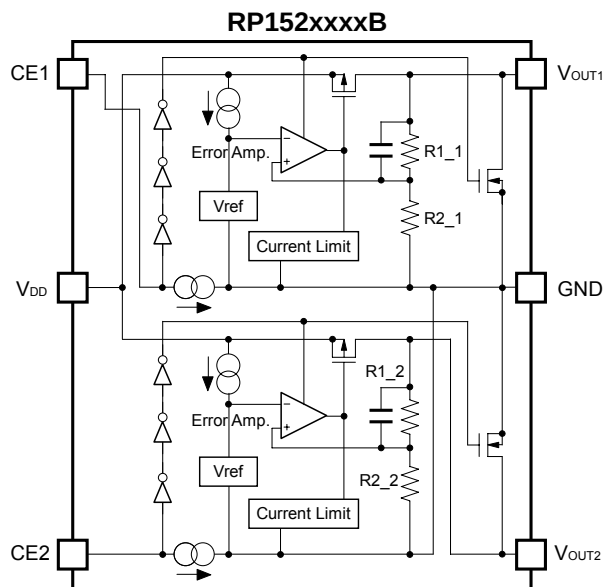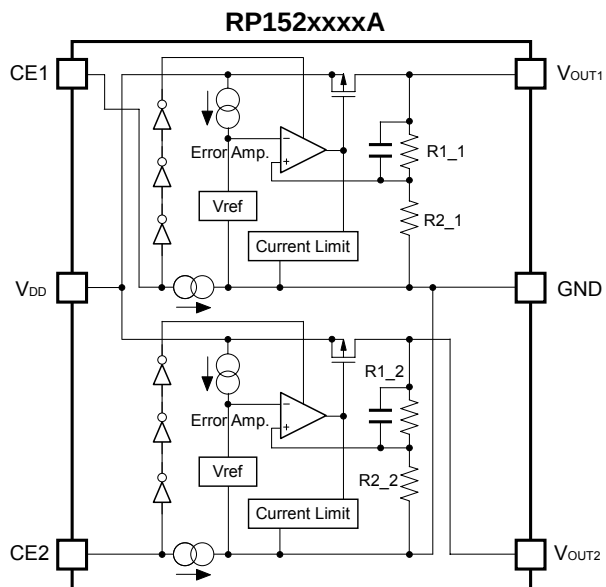


SELECTION GUIDE

The output voltage, auto discharge function, start-up sequence, and package, etc. for the ICs can be selected at the user's request.

Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
RP152Lxxx*-TR	DFN1212-6	5,000 pcs	Yes	Yes
RP152Nxxx*-TR-FE	SOT-23-6	3,000 pcs	Yes	Yes
xxx: The combination of output voltage for each channel can be designated by serial numbers. (from 001) The output voltage for each channel can be set in the range from 0.8V to 3.6V in 0.1V steps. (For details, please refer to MARK INFORMATION.) * : The auto discharge function at off state and start-up sequence are options as follows. (A) without auto-discharge function at off state (B) with auto-discharge function at off state (C) with start-up sequence and auto-discharge function				

PIN CONFIGURATIONS

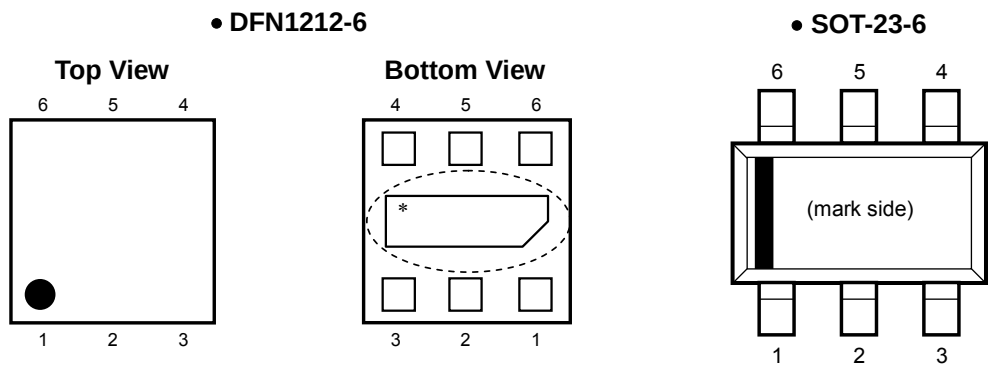

PIN DESCRIPTIONS

• DFN1212-6

Pin No.	Symbol	Description
1	V _{OUT1}	Output Pin 1
2	V _{OUT2}	Output Pin 2
3	GND	Ground Pin
4	CE2	Chip Enable Pin 2 ("H" Active)
5	V _{DD}	Input Pin
6	CE1	Chip Enable Pin 1 ("H" Active)

*) Tab is GND level. (They are connected to the reverse side of this IC.)
The tab is better to be connected to the GND, but leaving it open is also acceptable.

• SOT-23-6

Pin No.	Symbol	Description
1	CE1	Chip Enable Pin 1 ("H" Active)
2	V _{DD}	Input Pin
3	CE2	Chip Enable Pin 2 ("H" Active)
4	V _{OUT2}	Output Pin 2
5	GND	Ground Pin
6	V _{OUT1}	Output Pin 1

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V_{IN}	Input Voltage	6.0	V
V_{CE}	Input Voltage (CE Pin)	−0.3 to 6.0	V
V_{OUT1}, V_{OUT2}	Output Voltage	−0.3 to $V_{IN}+0.3$	V
I_{OUT1}, I_{OUT2}	Output Current	180	mA
P_D	Power Dissipation (DFN1212-6)*	600	mW
	Power Dissipation (SOT-23-6)*	420	
T_{opt}	Operating Temperature Range	−40 to 85	°C
T_{stg}	Storage Temperature Range	−55 to 125	°C

*) For Power Dissipation, please refer to PACKAGE INFORMATION.

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings is not assured.

ELECTRICAL CHARACTERISTICS

V_{IN} =Set $V_{OUT}+1.0V$ ($V_{OUT}>1.5V$), $V_{IN}=2.5V$ ($V_{OUT}\leq 1.5V$), $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=0.22\mu F$, unless otherwise noted.

The specification in is checked and guaranteed by design engineering at $-40^{\circ}C \leq T_{opt} \leq 85^{\circ}C$.

• RP152x

$T_{opt}=25^{\circ}C$

Symbol	Item	Conditions		Min.	Typ.	Max.	Unit
V _{OUT}	Output Voltage	T _{opt} =25°C	V _{OUT} > 2.0V	×0.99		×1.01	V
			V _{OUT} ≤ 2.0V	−20		+20	mV
		−40°C ≤ T _{opt} ≤ 85°C	V _{OUT} > 2.0V	×0.97		×1.03	V
			V _{OUT} ≤ 2.0V	−60		+60	mV
I _{OUT}	Output Current			150			mA
ΔV _{OUT} / ΔI _{OUT}	Load Regulation	1mA ≤ I _{OUT} ≤ 150mA	0.8V≤V _{OUT} <1.1V		10	40	mV
			1.1V≤V _{OUT} <1.6V		15	50	
			1.6V≤V _{OUT} <2.0V		15	55	
			2.0V≤V _{OUT} ≤3.6V		15	60	
V _{DIF}	Dropout Voltage	Refer to the following table.					
I _{SS}	Supply Current	I _{OUT} =0mA			40	60	μA
I _{standby}	Standby Current	V _{CE} =0V			0.1	1.0	μA
ΔV _{OUT} / ΔV _{IN}	Line Regulation	Set V _{OUT} +0.5V ≤ V _{IN} ≤ 5.0V			0.02	0.10	%/V
RR	Ripple Rejection	f=1kHz, Ripple 0.2Vp-p V _{IN} =Set V _{OUT} +1V, I _{OUT} =30mA (In case that V _{OUT} ≤ 2.0V, V _{IN} =3V)			70		dB
V _{IN}	Input Voltage*			1.40		5.25	V
ΔV _{OUT} / ΔT _{opt}	Output Voltage Temperature Coefficient	−40°C ≤ T _{opt} ≤ 85°C			±80		ppm /°C
I _{SC}	Short Current Limit	V _{OUT} =0V			40		mA
I _{PD}	CE Pull-down Current				0.3		μA
V _{CEH}	CE Input Voltage "H"			1.0			V
V _{CEL}	CE Input Voltage "L"					0.4	V
en	Output Noise	BW=10Hz to 100kHz			60		μVrms
R _{LOW}	Low Output Nch Tr. ON Resistance (of B/C version)	V _{IN} =4.0V, V _{CE} =0V	C version (VR2)		10		Ω
			Others		50		

*) The maximum Input Voltage of the ELECTRICAL CHARACTERISTICS is 5.25V. In case of exceeding this specification, the IC must be operated on condition that the Input Voltage is up to 5.5V and the total operating time is within 500hrs.

• Dropout Voltage by Output Voltage

Output Voltage V_{OUT} (V)	Dropout Voltage V_{DIF} (V)		
	Condition	Typ.	Max.
$V_{OUT}=0.8$	$I_{OUT}=150\text{mA}$	0.63	0.87
$V_{OUT}=0.9$		0.55	0.80
$1.0 \leq V_{OUT} < 1.2$		0.50	0.72
$1.2 \leq V_{OUT} < 1.4$		0.42	0.62
$1.4 \leq V_{OUT} < 1.7$		0.37	0.55
$1.7 \leq V_{OUT} < 2.1$		0.30	0.46
$2.1 \leq V_{OUT} < 2.5$		0.25	0.39
$2.5 \leq V_{OUT} < 3.0$		0.23	0.35
$3.0 \leq V_{OUT} \leq 3.6$		0.21	0.32

RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)


All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

THE START-UP SEQUENCE CIRCUIT


The Start-up sequence circuit is applied in C Version.

When the CE of VR1 and VR2 started-up at the same time, VR2 stands-up in 100 μs delay after VR1 stands up simultaneously with CE. Moreover, to disabling is depending upon the setting output voltage and the external capacitors. VR1 reduces the output voltage by the Nch driver of about 50 Ω , and VR2 reduces the output voltage by the Nch driver of about 10 Ω .

C ver.

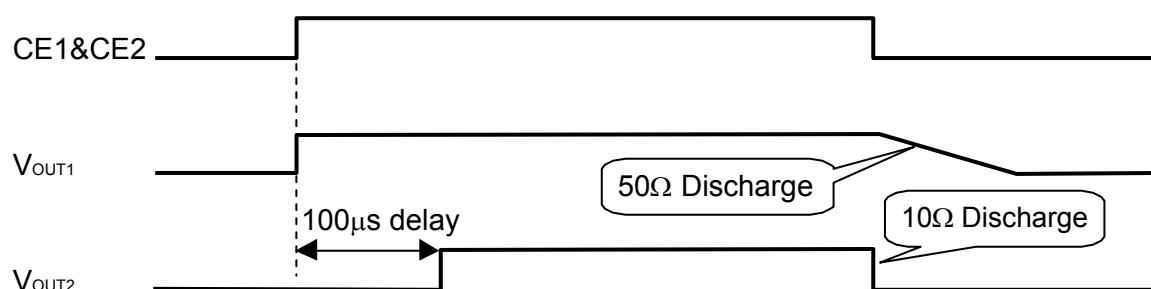

TYPICAL APPLICATIONS

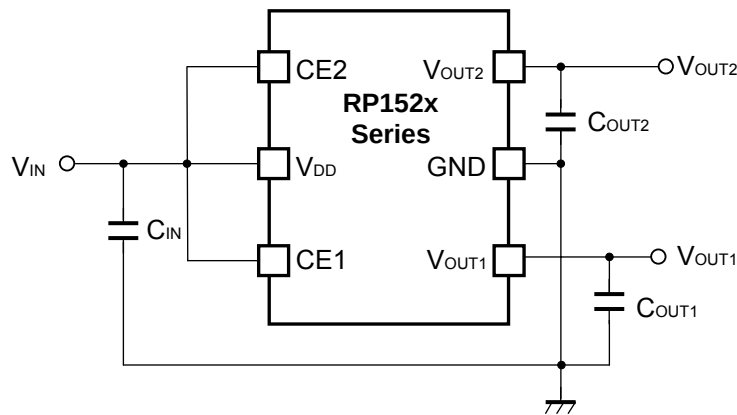

$C_{IN}=C_{OUT1}=C_{OUT2}=\text{Ceramic } 0.22\mu\text{F}$
 (External Components)
 Murata : GRM155B31A224KE18B

TECHNICAL NOTES

When using these ICs, consider the following points:

PCB Layout

In these ICs, phase compensation is made for securing stable operation even if the load current is varied.

For this purpose, use capacitors ($0.22\mu\text{F}$ or more) for C_{OUT1} and C_{OUT2} with good frequency characteristics and ESR (Equivalent Series Resistance).


(Note: If additional ceramic capacitors are connected with parallel to the output pin with an output capacitor for phase compensation, the operation might be unstable. Because of this, test these ICs with as same external components as ones to be used on the PCB.)

Phase Compensation


Make V_{DD} and GND lines sufficient. If their impedance is high, noise pickup or unstable operation may result. Connect capacitors with a capacitance value as much as $0.22\mu\text{F}$ or more between V_{DD} and GND pin, and as close as possible to the pins (C_{IN}).

Set external components, especially the output capacitors, as close as possible to the ICs, and make wiring as short as possible (C_{OUT1} / C_{OUT2}).


TEST CIRCUITS

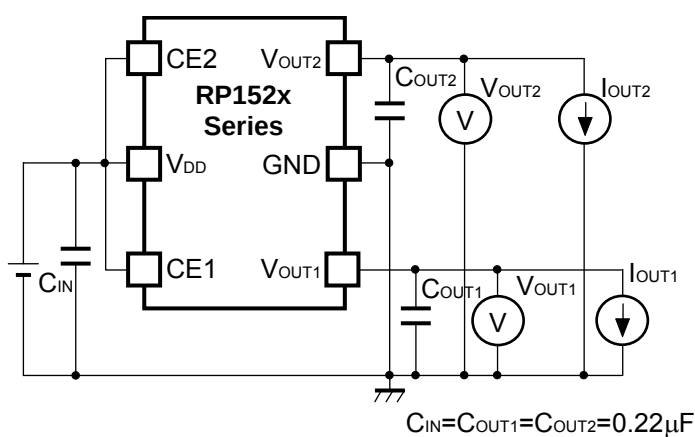


Basic Test Circuit

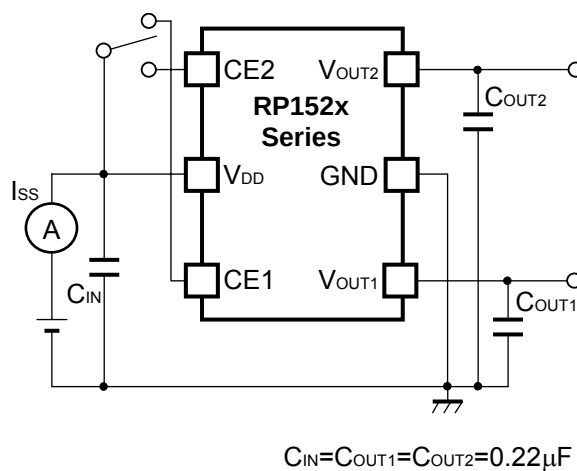

Test Circuit for Supply Current

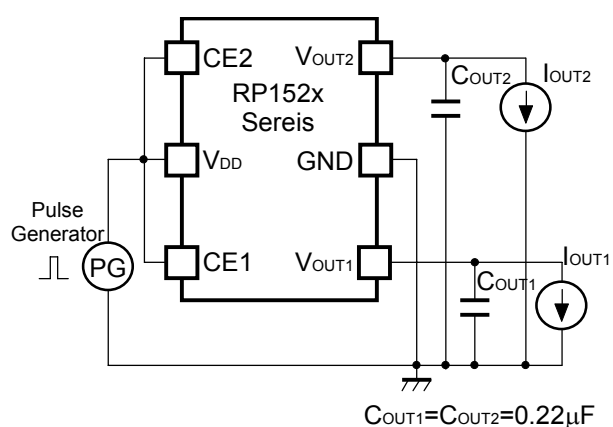

**Test Circuit for Ripple Rejection
& Line Transient Response**

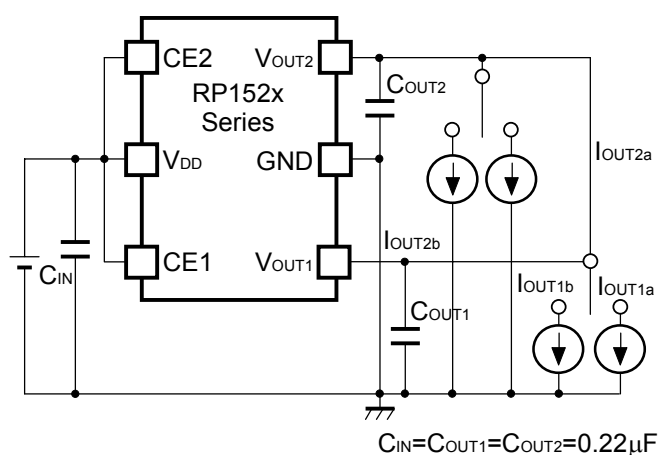


Test Circuits for Load Transient Response


TYPICAL CHARACTERISTICS

1) Output Voltage vs. Output Current ($T_{opt}=25^{\circ}\text{C}$)


0.8V(VR1/VR2)

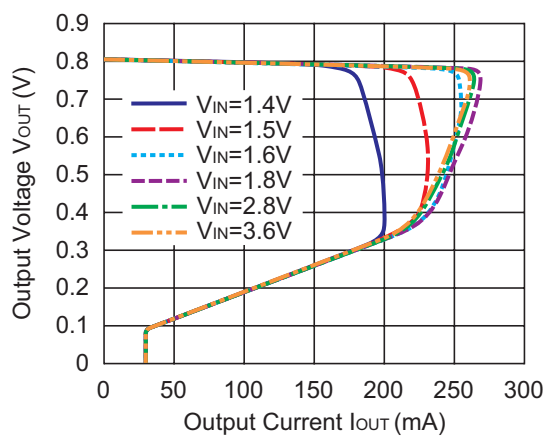

2.5V(VR1/VR2)

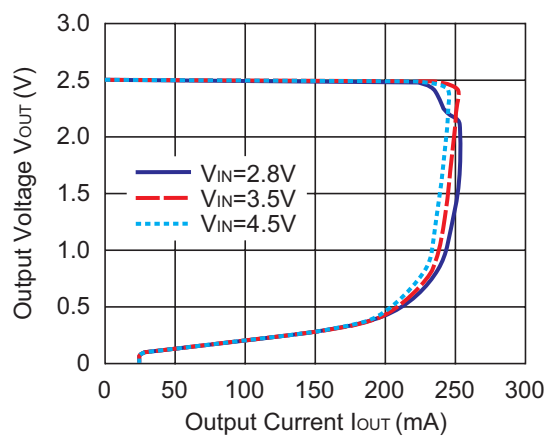


3.6V(VR1/VR2)

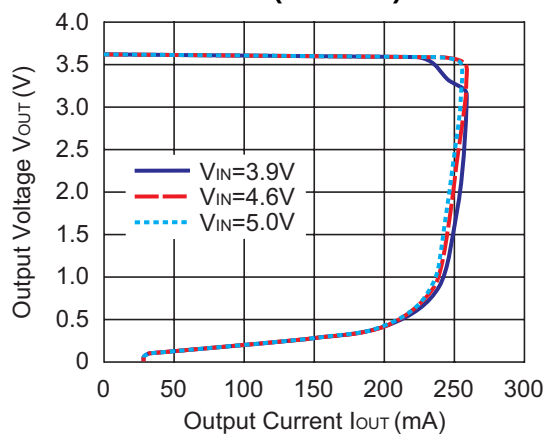



2) Output Voltage vs. Input Voltage ($T_{opt}=25^{\circ}\text{C}$)

0.8V(VR1/VR2)



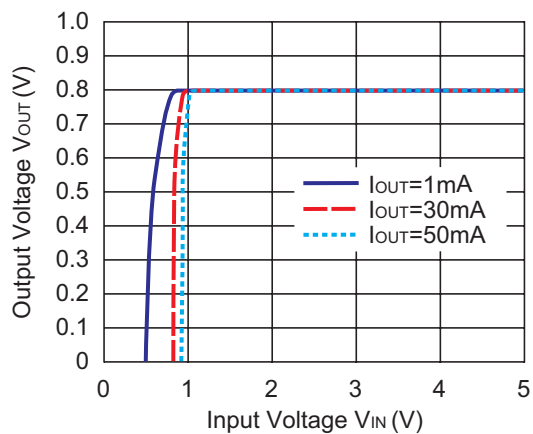


2.5V(VR1/VR2)

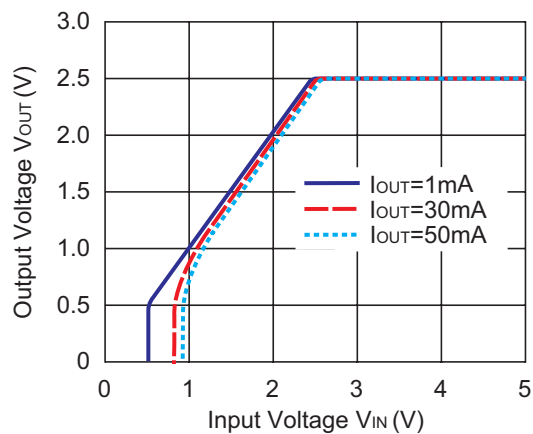

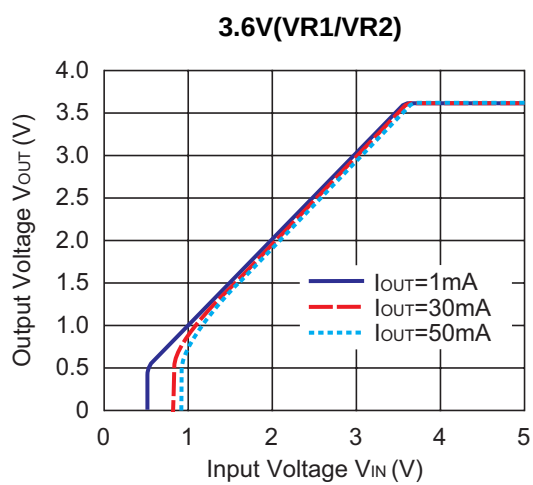


3) Supply Current vs. Input Voltage

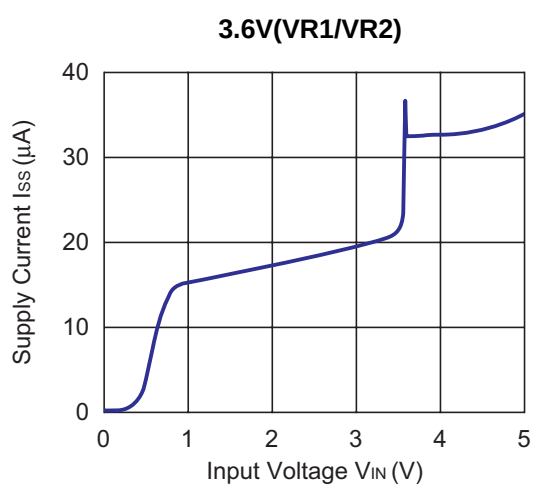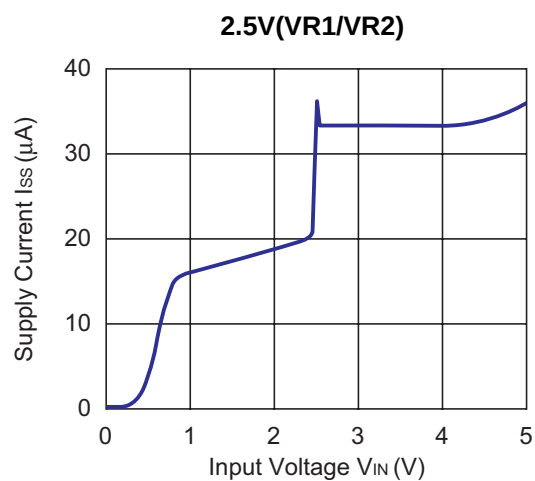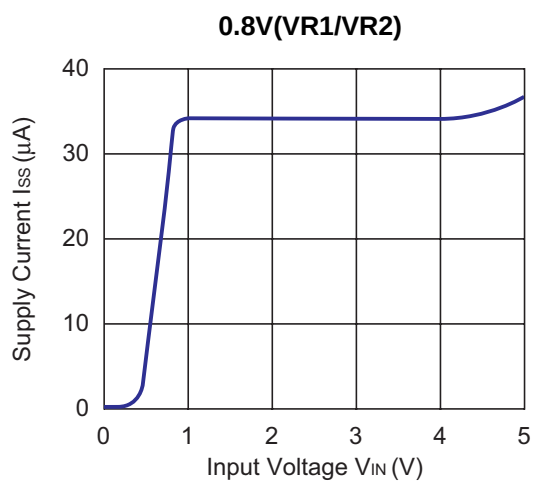


4) Output Voltage vs. Temperature


0.8V(VR1/VR2)

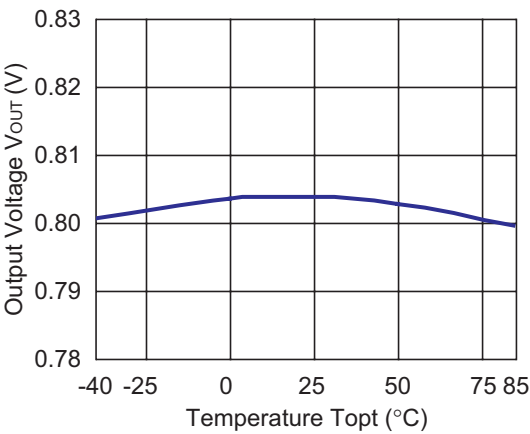

2.5V(VR1/VR2)

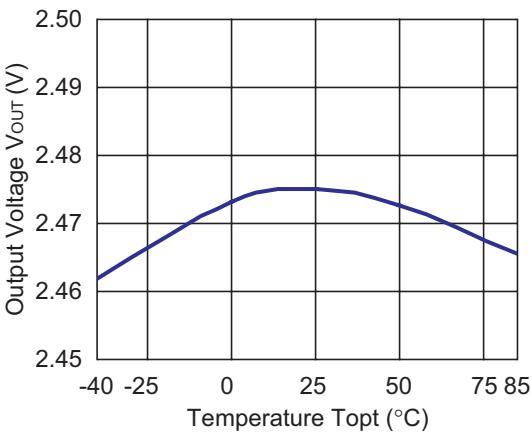


3.6V(VR1/VR2)

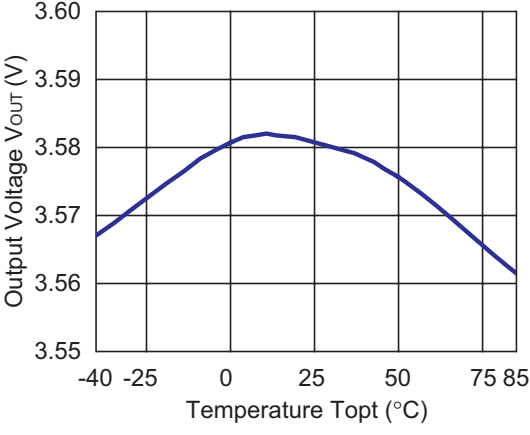



5) Supply Current vs. Temperature

0.8V(VR1/VR2)



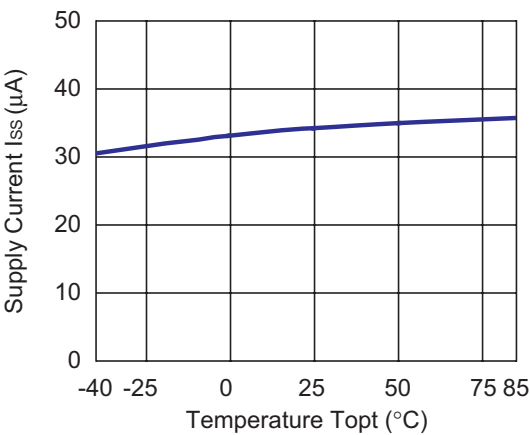


2.5V(VR1/VR2)

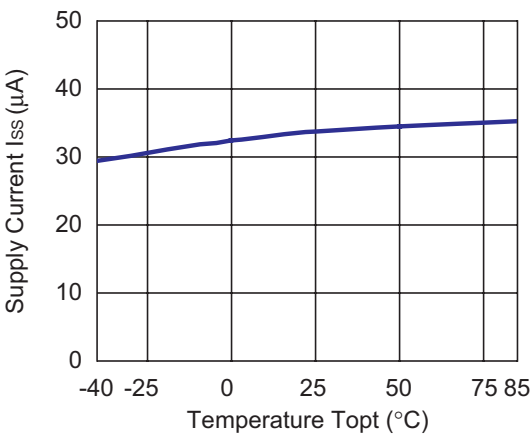


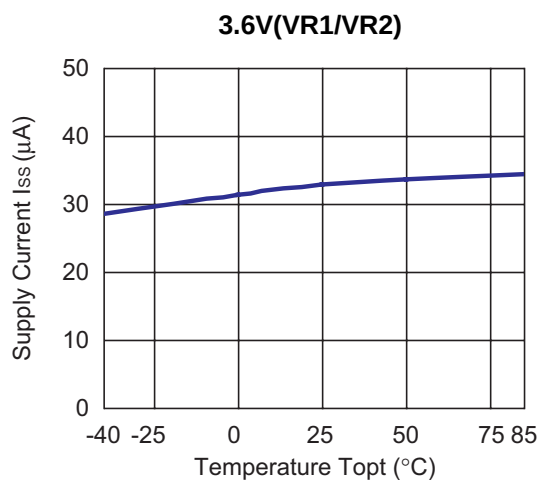


6) Dropout Voltage vs. Output Current

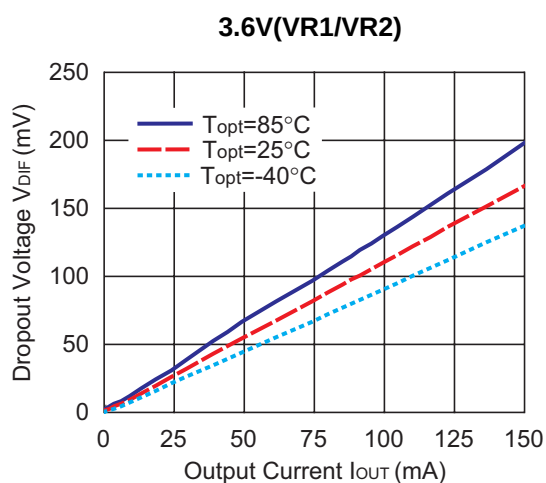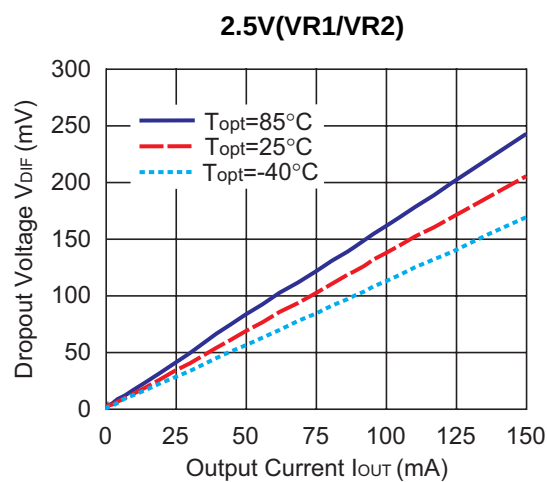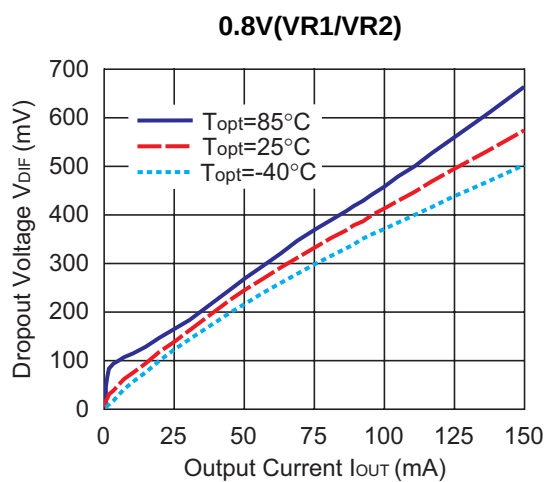

7) Dropout Voltage vs. Set Output Voltage


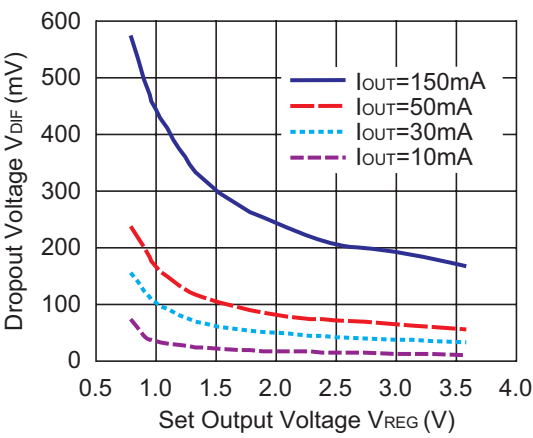




8) Minimum Operating Voltage

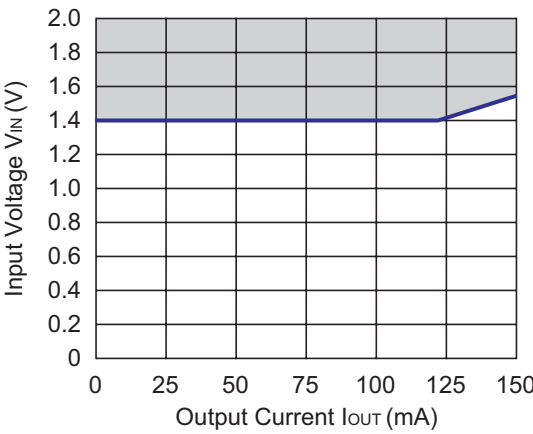


Hatched area is available for 0.8V output

9) Ripple Rejection vs. Input Voltage (C_{IN} =none, $C_{OUT1}=C_{OUT2}$ =Ceramic 0.22 μ F, Ripple=0.2Vp-p, $T_{opt}=25^{\circ}\text{C}$)
2.5V(V_{R1}/V_{R2})

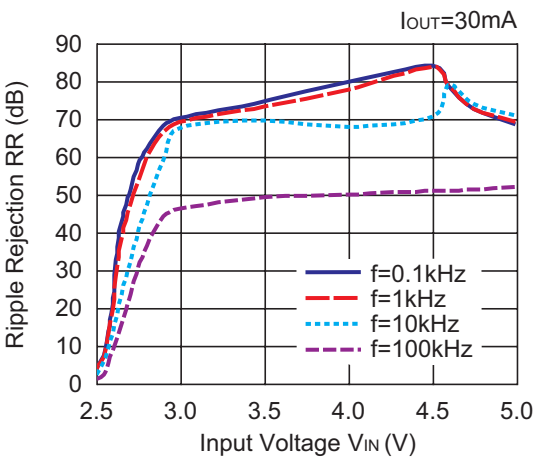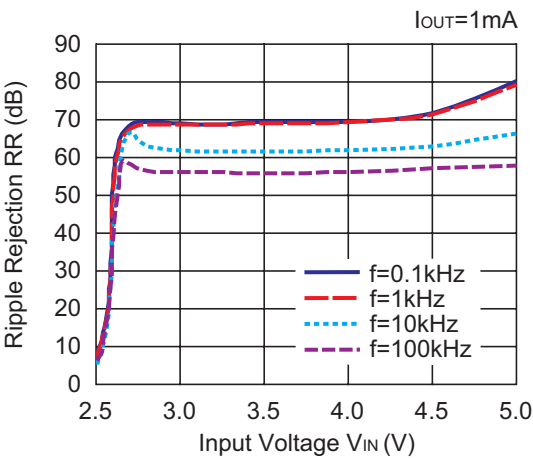

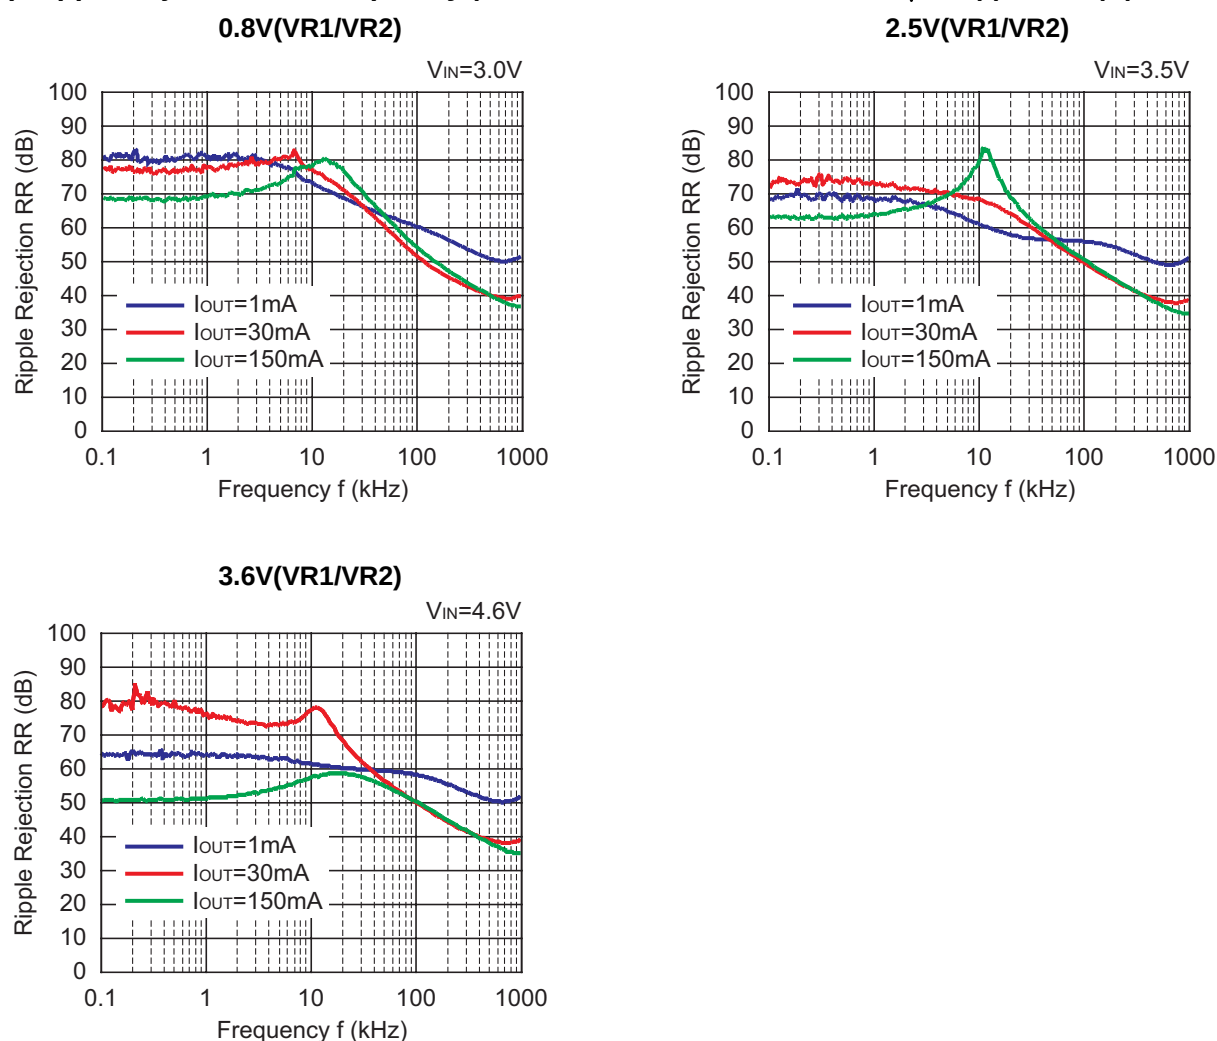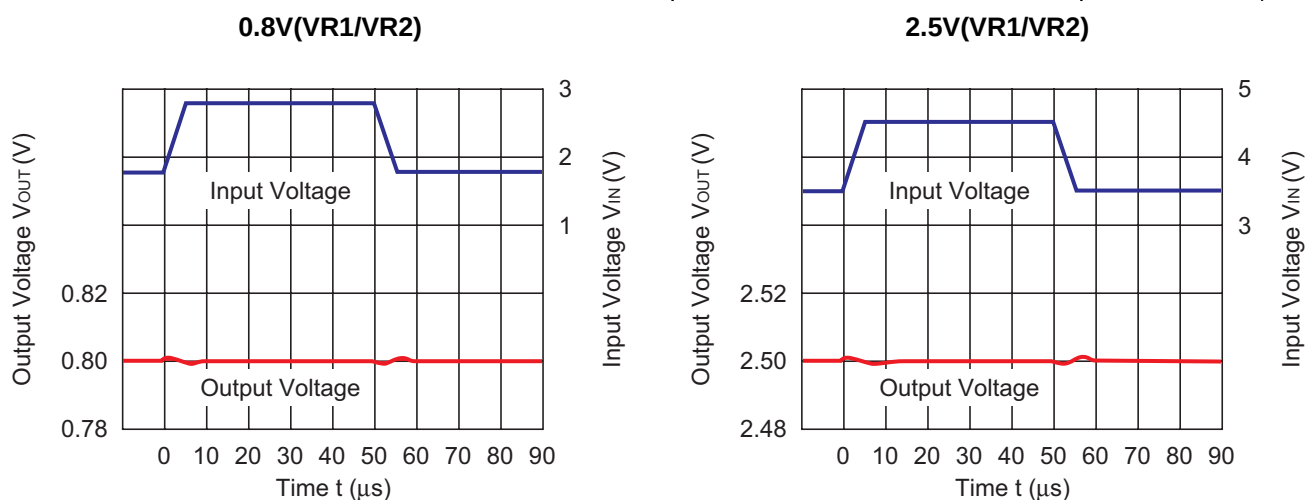
10) Ripple Rejection vs. Frequency (C_{IN} =none, $C_{OUT1}=C_{OUT2}$ =Ceramic $0.22\mu\text{F}$, Ripple= 0.2Vp-p , $T_{opt}=25^\circ\text{C}$)

11) Input Transient Response ($I_{OUT}=30\text{mA}$, $t_r=t_f=5\mu\text{s}$, C_{IN} =none, $C_{OUT1}=C_{OUT2}=0.22\mu\text{F}$, $T_{opt}=25^\circ\text{C}$)

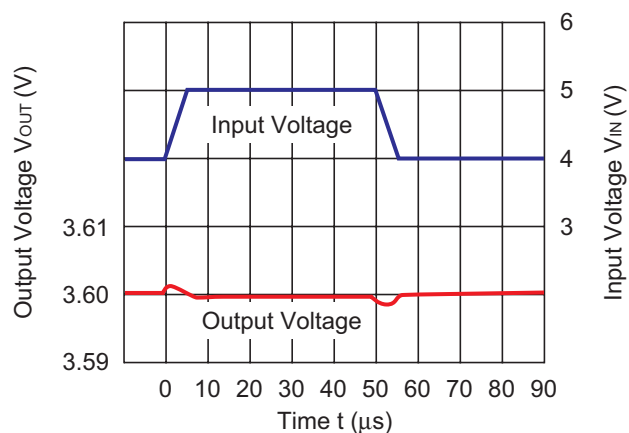
3.6V(VR1/VR2)




12) Load Transient Response ($t_r=t_f=500\mu s$, $C_{IN}=C_{OUT1}=C_{OUT2}=0.22\mu F$, $T_{opt}=25^\circ C$)

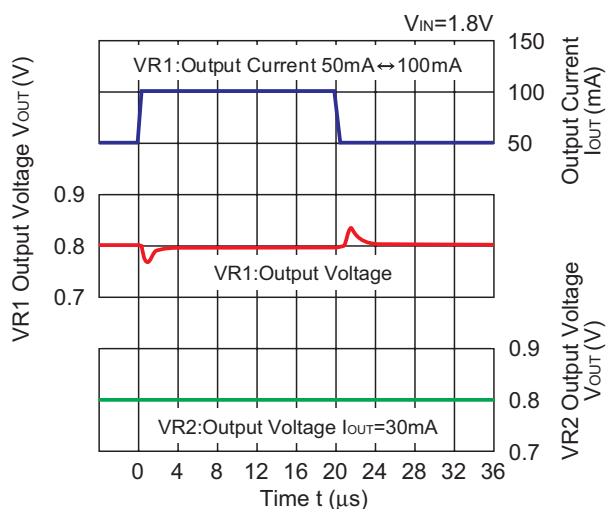
0.8V(VR1/VR2)




0.8V(VR1/VR2)

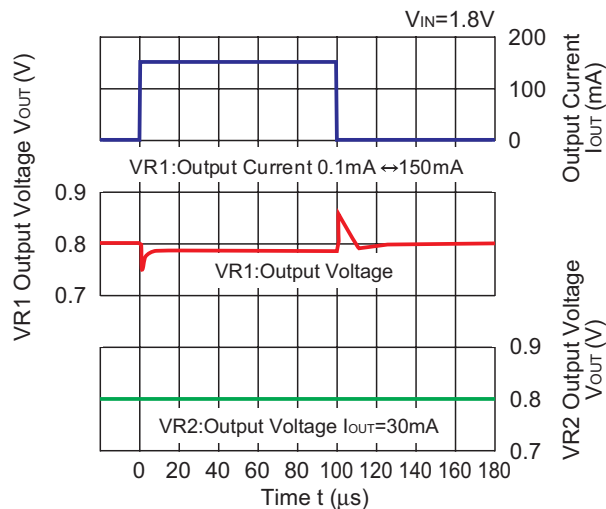


0.8V(VR1/VR2)

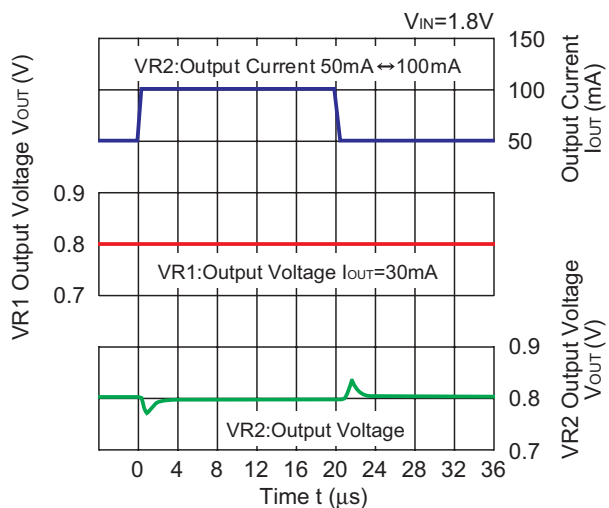


0.8V(VR1/VR2)

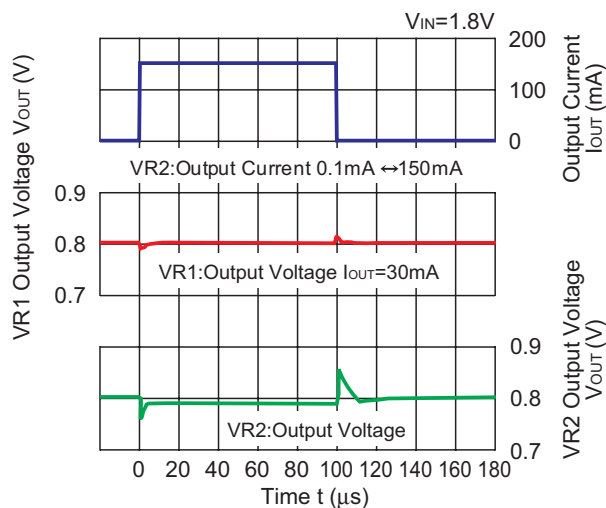


2.5V(VR1/VR2)

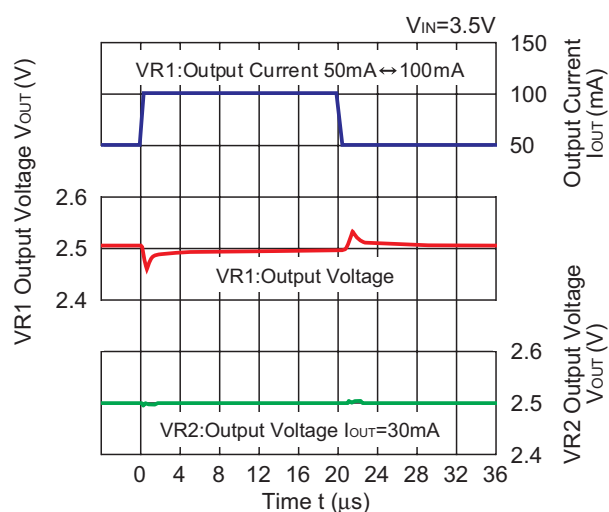


2.5V(VR1/VR2)

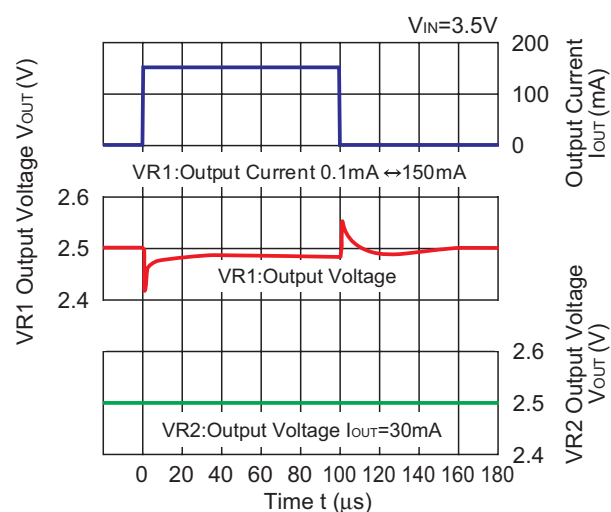


2.5V(VR1/VR2)

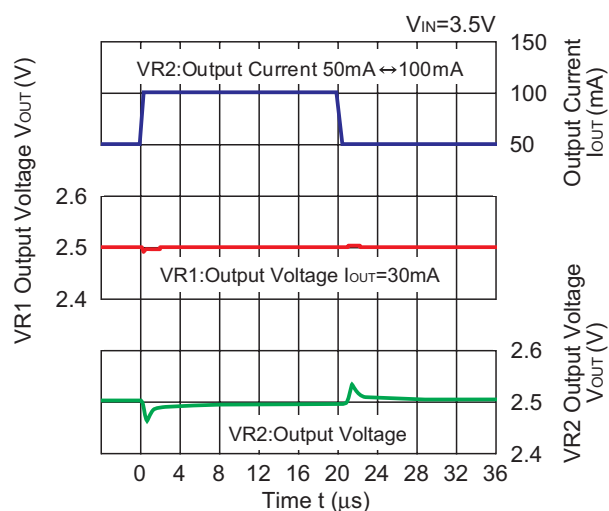


2.5V(VR1/VR2)

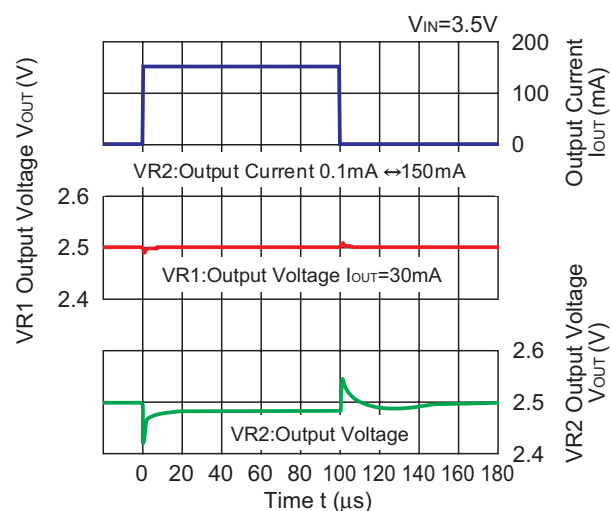


3.6V(VR1/VR2)

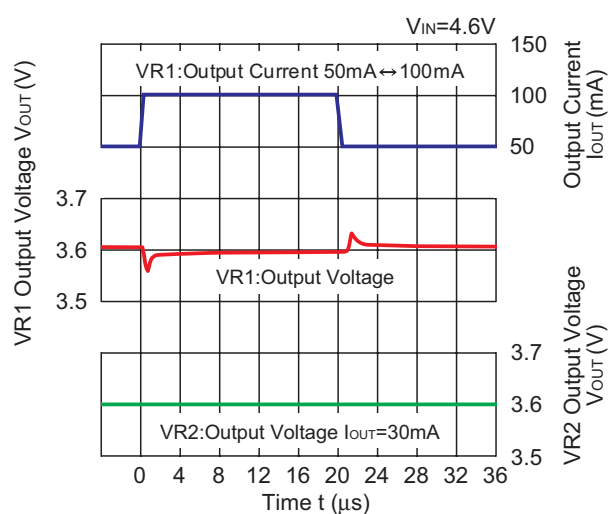


3.6V(VR1/VR2)

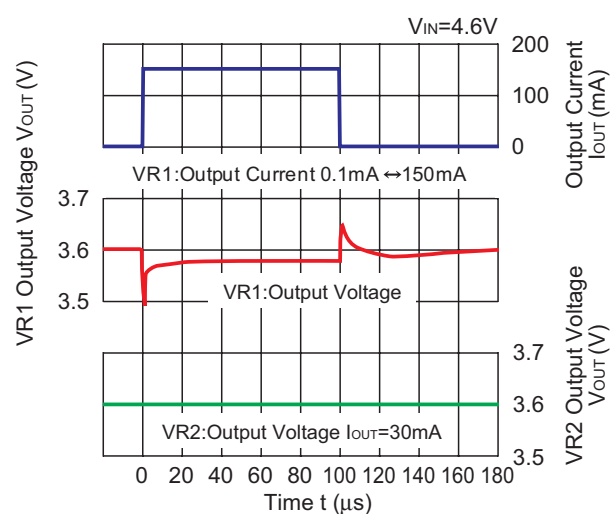

3.6V(VR1/VR2)

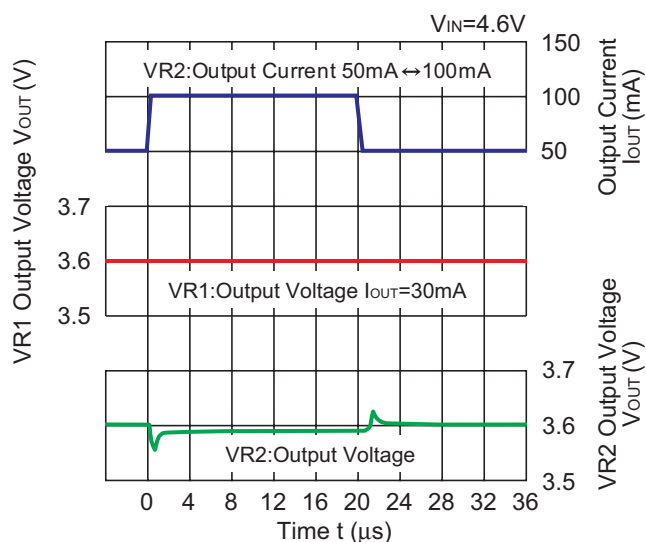


3.6V(VR1/VR2)

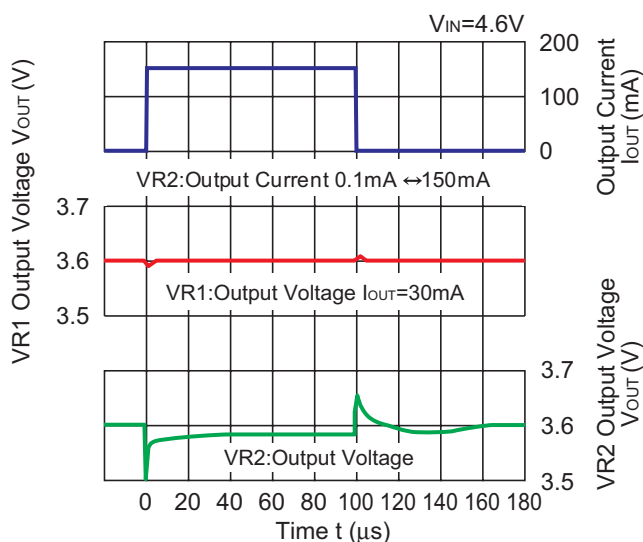


13) Turn On Speed with CE pin ($C_{IN}=C_{OUT1}=C_{OUT2}=0.22\mu F$, $T_{opt}=25^{\circ}C$)


0.8V A/B Version (VR1/ VR2), C Version (VR1)

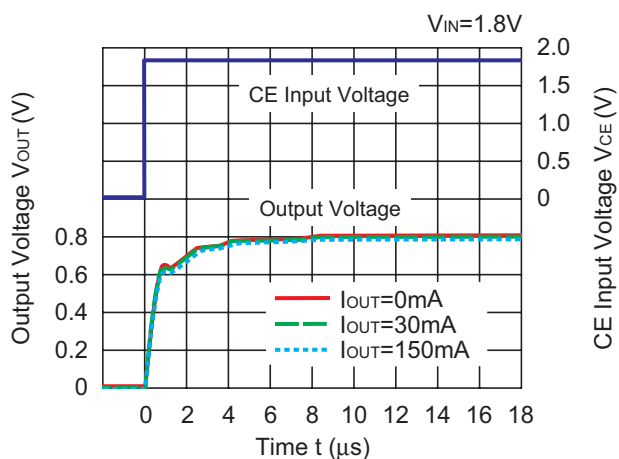


0.8V C Version (VR2)

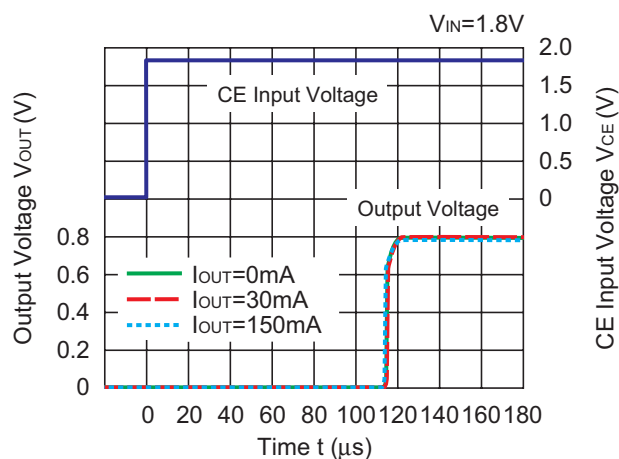


2.5V A/B Version (VR1/ VR2), C Version (VR1)

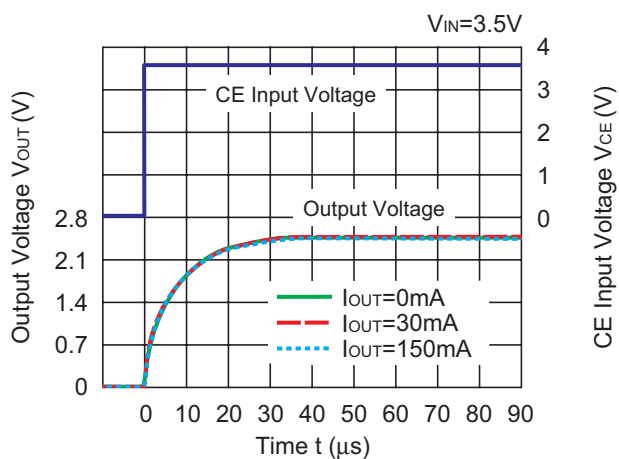


2.5V C Version (VR2)

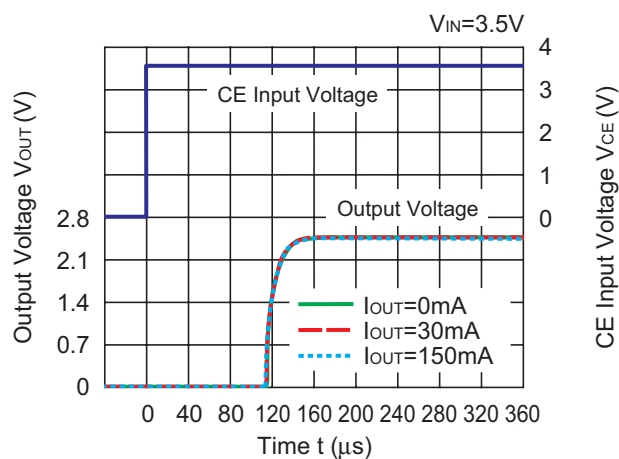


3.6V A/B Version (VR1/ VR2), C Version (VR1)

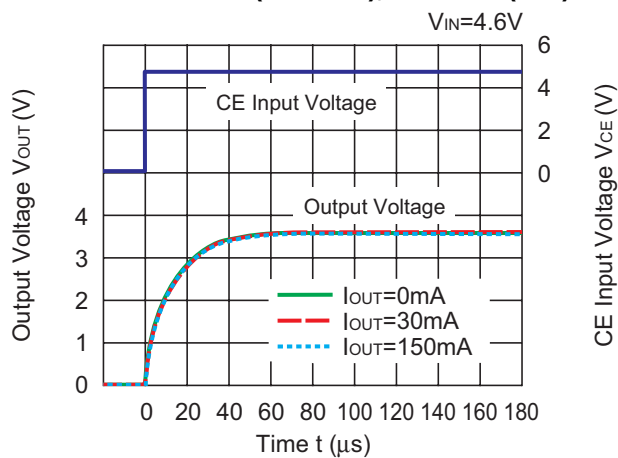


3.6V C Version (VR2)

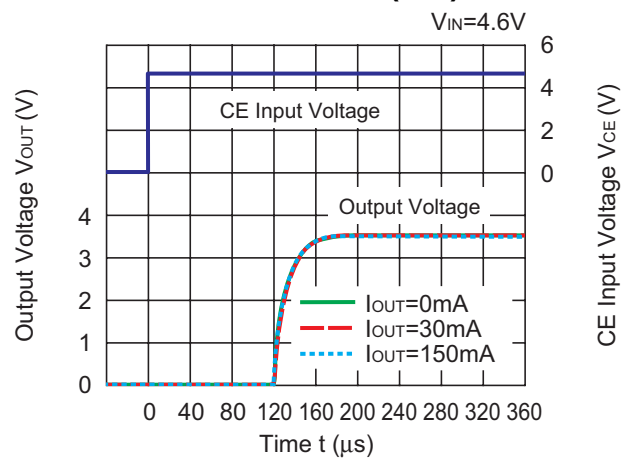14) Turn Off Speed with CE pin ($C_{IN}=C_{OUT1}=C_{OUT2}=0.22\mu F$, $T_{opt}=25^{\circ}C$)


0.8V B Version (VR1/ VR2), C Version (VR1)

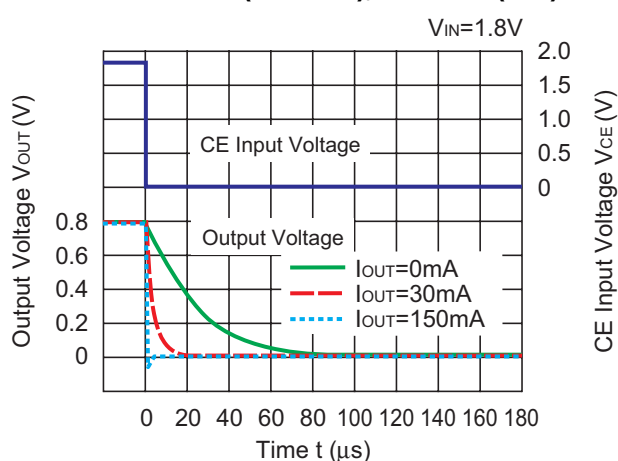


0.8V C Version (VR2)

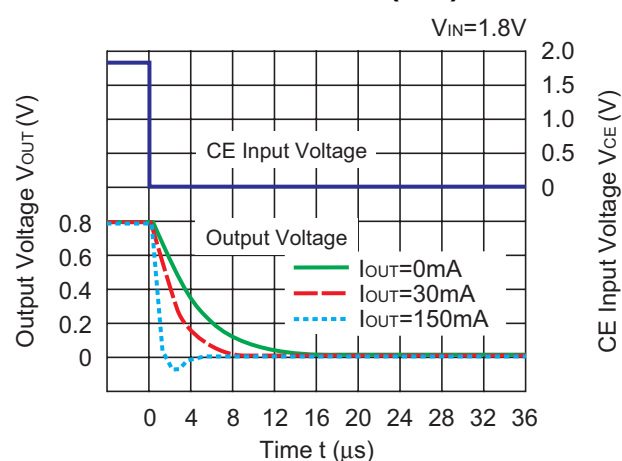


2.5V B Version (VR1/ VR2), C Version (VR1)

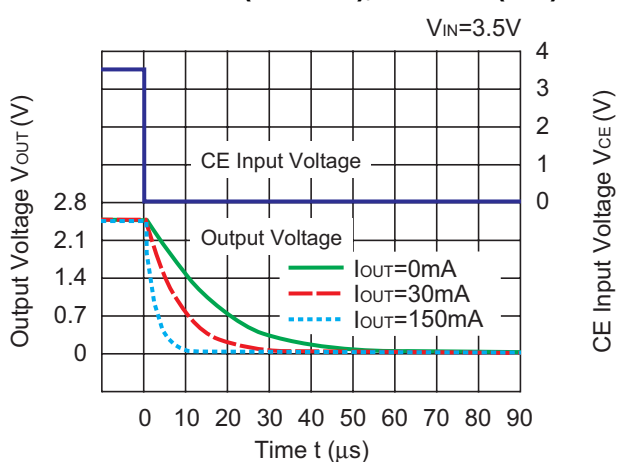


2.5V C Version (VR2)

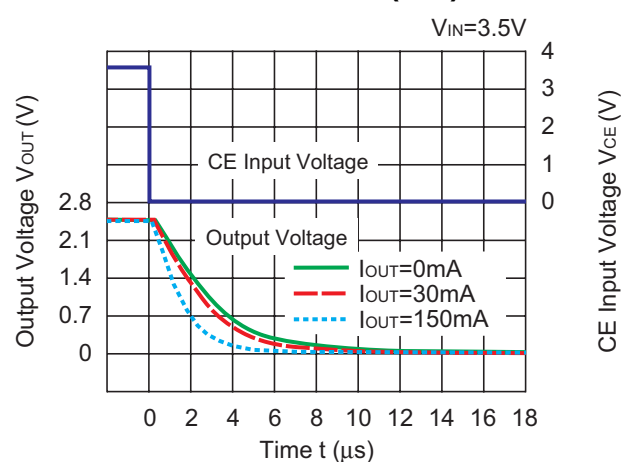

3.6V B Version (VR1/ VR2), C Version (VR1)
 $V_{IN}=4.6V$

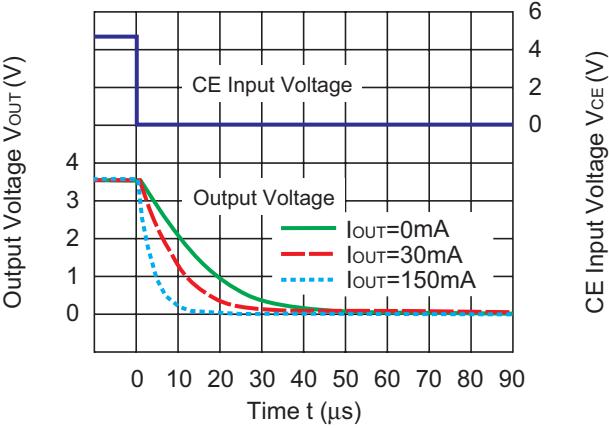

3.6V C Version (VR2)
 $V_{IN}=4.6V$

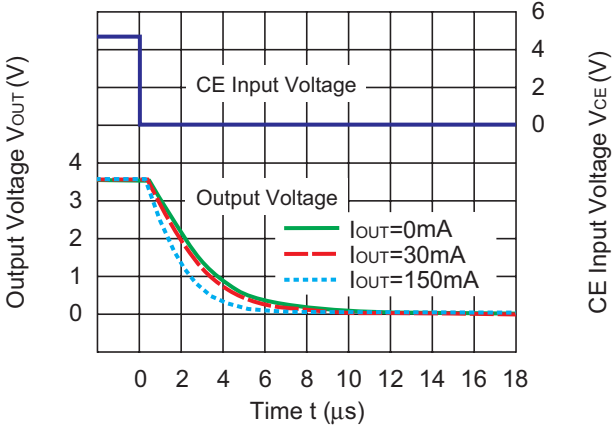

ESR vs. Output Current

When using these ICs, consider the following points:

The relations between I_{OUT} (Output Current) and ESR of an output capacitor are shown below.




The conditions when the white noise level is under $40\mu V$ (Avg.) are marked as the hatched area in the graph.

Measurement conditions

Frequency Band : 10Hz to 2MHz

Temperature : $-40^{\circ}C$ to $85^{\circ}C$

C_{IN} , C_{OUT1} , C_{OUT2} : $0.22\mu F$ (Murata , GRM155B10J224KE01)

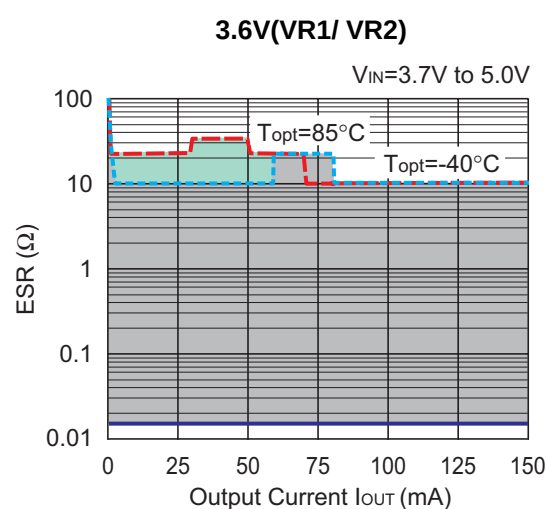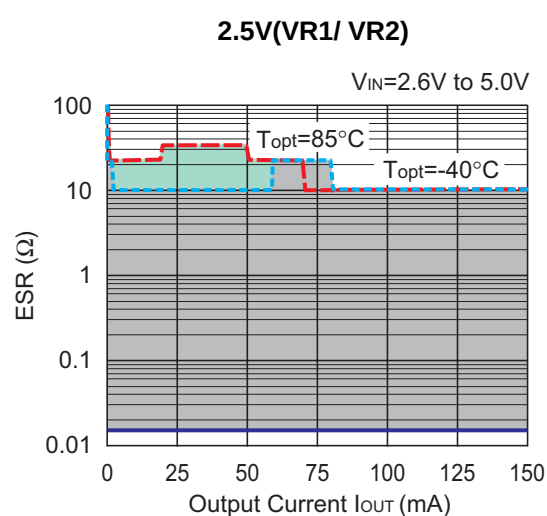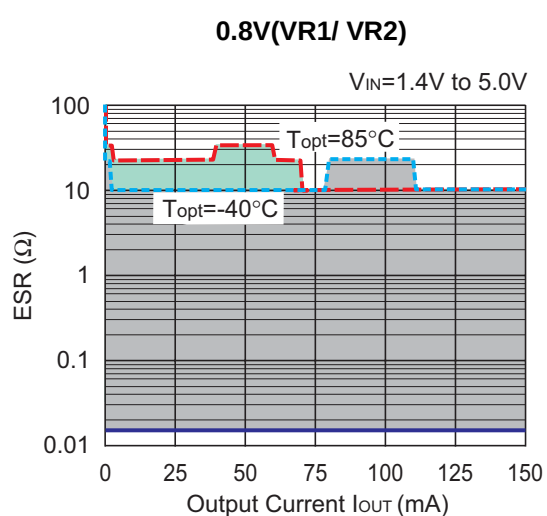



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, firecontainment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.

RICOH COMPANY., LTD. Electronic Devices Company



■ Ricoh presented with the Japan Management Quality Award for 1999.
Ricoh continually strives to promote customer satisfaction, and shares the achievements of its management quality improvement program with people and society.



■ Ricoh awarded ISO 14001 certification.

The Ricoh Group was awarded ISO 14001 certification, which is an international standard for environmental management systems, at both its domestic and overseas production facilities. Our current aim is to obtain ISO 14001 certification for all of our business offices.

<http://www.ricoh.com/LSI/>

RICOH COMPANY, LTD. Electronic Devices Company

● Higashi-Shinagawa Office (International Sales)
3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

RICOH EUROPE (NETHERLANDS) B.V.

● Semiconductor Support Centre
Prof. W.H.Keesomlaan 1, 1183 DL Amstelveen, The Netherlands
P.O.Box 114, 1180 AC Amstelveen
Phone: +31-20-5474-309 Fax: +31-20-5474-791

RICOH ELECTRONIC DEVICES KOREA Co., Ltd.

11 floor, Haesung 1 building, 942, Daechidong, Gangnamgu, Seoul, Korea
Phone: +82-2-2135-5700 Fax: +82-2-2135-5705

RICOH ELECTRONIC DEVICES SHANGHAI Co., Ltd.

Room403, No.2 Building, 690#Bi Bo Road, Pu Dong New district, Shanghai 201203,
People's Republic of China
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

RICOH COMPANY, LTD. Electronic Devices Company

● Taipei office
Room109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623



Ricoh completed the organization of the Lead-free production for all of our products. After Apr. 1, 2006, we will ship out the lead free products only. Thus, all products that will be shipped from now on comply with RoHS Directive.