


7-channel Darlington transistor array BA6250/BA6250F/BA6251/BA6251F

The BA6250, BA6250F, BA6251, and BA6251F are 7-channel transistor arrays particularly suitable for interfaces between a microcomputer in a VTR and the various ICs, or between one IC and another, and for low current drives such as LEDs.


●Features

- 1) High withstanding output voltage of 30V (max.).
- 2) Output current of 20mA max. ($V_{IN} \geq 3V$).

●Internal circuit configuration diagram

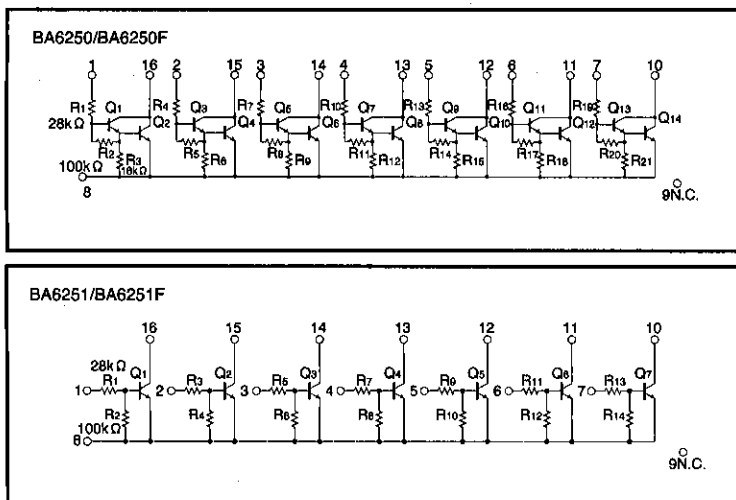

●Block diagram

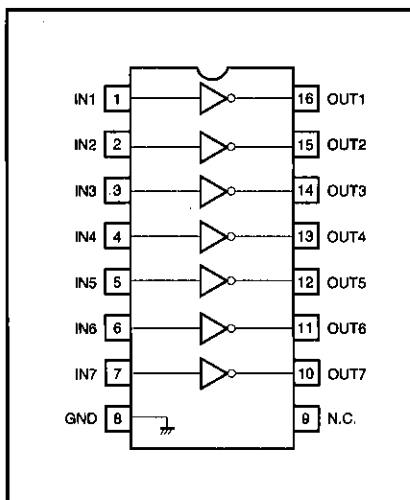

●Absolute maximum ratings ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Limits	Unit
Power supply voltage	V_{CE0}	30	V
Power dissipation	P_d	500 *	mW
Operating temperature	T_{opr}	$-25 \sim 75$	$^\circ\text{C}$
Storage temperature	T_{stg}	$-55 \sim 125$	$^\circ\text{C}$
Input voltage	V_{IN}	30	V
Output current	$I_O \text{ Max.}$	30	mA

* Reduced by 5mW for each increase in T_a of 1°C over 25°C .

Transistor arrays

●Electrical characteristics (unless otherwise noted, $T_a=25^\circ\text{C}$, $V_{CC}=12\text{V}$)

Parameter	Symbol	Type	Min.	Typ.	Max.	Unit	Conditions	Measurement Circuit
Output power supply voltage range	V_O	BA6250 / BA6250F	—	12	28	V	—	Fig. 1
		BA6251 / BA6251F	—	12	28		—	
"H" input voltage	V_{IH}	BA6250 / BA6250F	3	—	—	V	$I_{OUT}=20\text{mA}$	Fig. 1
		BA6251 / BA6251F	2	—	—		$I_{OUT}\geq 1\text{mA}$	
"L" input voltage	V_{IL}	BA6250 / BA6250F	—	—	0.6	V	$I_{OUT}\leq 10\mu\text{A}$	Fig. 2
		BA6251 / BA6251F	—	—	0.3		$I_{OUT}\leq 10\mu\text{A}$	
Output voltage	V_{OUT}	BA6250 / BA6250F	—	—	1.4	V	$I_{OUT}=20\text{mA}$, $V_{IN}=12\text{V}$	Fig. 1
Output saturation voltage	$V_{CE(sat)}$	BA6251 / BA6251F	—	0.3	—		$I_{OUT}=10\text{mA}$, $V_{IN}=12\text{V}$	
Output current	I_{OUT}	BA6250 / BA6250F	—	—	20	mA	$V_{IN}\geq 3\text{V}$	Fig. 1
		BA6251 / BA6251F	—	—	20		$V_{IN}\geq 12\text{V}$	
Input current	I_{IN}	BA6250 / BA6250F	—	—	0.6	mA	$I_{OUT}=10\text{mA}$, $V_{IN}=12\text{V}$	Fig. 1
		BA6251 / BA6251F	—	—	0.6		$I_{OUT}=10\text{mA}$, $V_{IN}=12\text{V}$	
Output leakage current	I_L	BA6250 / BA6250F	—	—	1	μA	$V_{CC}=28\text{V}$, $V_{IN}=0\text{V}$	—

●Measurement circuits

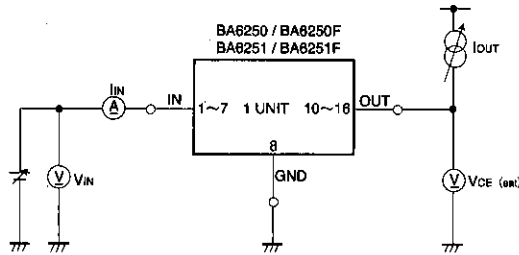


Fig.1

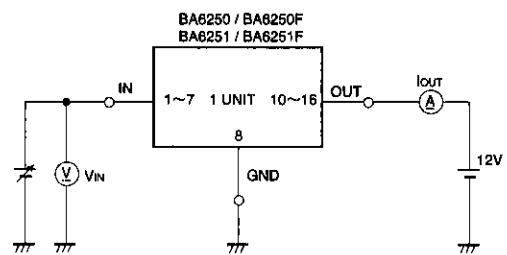


Fig.2

●External dimensions (Units: mm)

