

# Hex Schmitt trigger


## BU4584B / BU4584BF / BU4584BFV

The BU4584B, BU4584BF, and BU4584BFV are inverter-type Schmitt trigger circuits, with six circuits mounted on a single chip. These are ideal when enhanced noise immunity is required, and when wave form rectification circuits with slow rise or fall input times are involved.

### ●Features

- 1) Low power dissipation.
- 2) Wide range of operating power supply voltage.
- 3) High input impedance.
- 4) High fan-out.
- 5) Direct drive of 2 L-TTL inputs and LS-TTL input.

### ●Block diagram

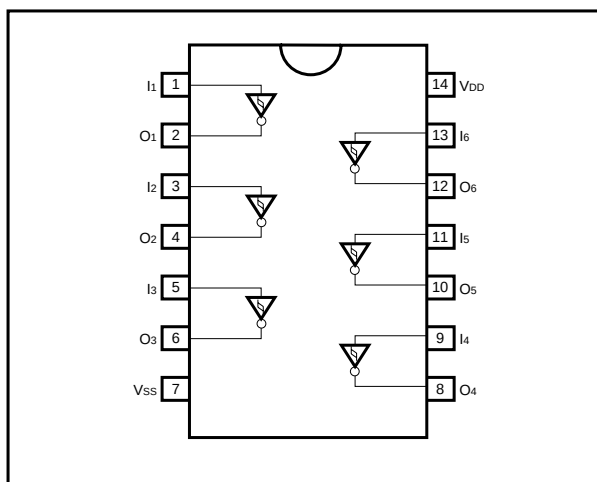

### ●Absolute maximum ratings ( $V_{SS} = 0V$ , $T_a = 25^\circ C$ )

| Parameter             | Symbol    | Limits                            | Unit       |
|-----------------------|-----------|-----------------------------------|------------|
| Power supply voltage  | $V_{DD}$  | $-0.3 \sim +18$                   | V          |
| Power dissipation     | $P_d$     | 1000 (DIP), 450 (SOP), 350 (SSOP) | mW         |
| Operating temperature | $T_{opr}$ | $-40 \sim +85$                    | $^\circ C$ |
| Storage temperature   | $T_{stg}$ | $-55 \sim +150$                   | $^\circ C$ |
| Input voltage         | $V_{IN}$  | $-0.3 \sim V_{DD} + 0.3$          | V          |

## ●Electrical characteristics

DC characteristics (unless otherwise noted,  $V_{SS} = 0V$ ,  $T_a = 25^\circ C$ )

| Parameter                  | Symbol          | Min.   | Typ. | Max.  | Unit | V <sub>DD</sub> (V) | Conditions              | Measurement circuit |
|----------------------------|-----------------|--------|------|-------|------|---------------------|-------------------------|---------------------|
|                            |                 |        |      |       |      |                     |                         |                     |
| Input high level voltage   | V <sub>IH</sub> | 3.5    | —    | —     | V    | 5                   | —                       | Fig.1               |
|                            |                 | 7.0    | —    | —     |      | 10                  |                         |                     |
|                            |                 | 11.0   | —    | —     |      | 15                  |                         |                     |
| Input low level voltage    | V <sub>IL</sub> | —      | —    | 1.5   | V    | 5                   | —                       |                     |
|                            |                 | —      | —    | 3.0   |      | 10                  |                         |                     |
|                            |                 | —      | —    | 4.0   |      | 15                  |                         |                     |
| Input high level current   | I <sub>IH</sub> | —      | —    | 0.3   | μA   | 15                  | V <sub>IH</sub> = 15V   |                     |
| Input low level current    | I <sub>IL</sub> | —      | —    | − 0.3 | μA   | 15                  | V <sub>IL</sub> = 0V    |                     |
| Output high level voltage  | V <sub>OH</sub> | 4.95   | —    | —     | V    | 5                   | I <sub>O</sub> = 0mA    |                     |
|                            |                 | 9.95   | —    | —     |      | 10                  |                         |                     |
|                            |                 | 14.95  | —    | —     |      | 15                  |                         |                     |
| Output low level voltage   | V <sub>OL</sub> | —      | —    | 0.05  | V    | 5                   | I <sub>O</sub> = 0mA    |                     |
|                            |                 | —      | —    | 0.05  |      | 10                  |                         |                     |
|                            |                 | —      | —    | 0.05  |      | 15                  |                         |                     |
| Output high level current  | I <sub>OH</sub> | − 0.44 | —    | —     | mA   | 5                   | V <sub>OH</sub> = 4.6V  |                     |
|                            |                 | − 1.1  | —    | —     |      | 10                  | V <sub>OH</sub> = 9.5V  |                     |
|                            |                 | − 3.0  | —    | —     |      | 15                  | V <sub>OH</sub> = 13.5V |                     |
| Output low level current   | I <sub>OL</sub> | 0.44   | —    | —     | mA   | 5                   | V <sub>OL</sub> = 0.4V  |                     |
|                            |                 | 1.1    | —    | —     |      | 10                  | V <sub>OL</sub> = 0.5V  |                     |
|                            |                 | 3.0    | —    | —     |      | 15                  | V <sub>OL</sub> = 1.5V  |                     |
| Static current consumption | I <sub>DD</sub> | —      | —    | 1     | μA   | 5                   | —                       |                     |
|                            |                 | —      | —    | 2     |      | 10                  |                         |                     |
|                            |                 | —      | —    | 4     |      | 5                   |                         |                     |
| Hysteresis voltage         | V <sub>H</sub>  | 0.15   | —    | 0.6   | V    | 5                   | —                       |                     |
|                            |                 | 0.25   | —    | 1.0   |      | 10                  |                         |                     |
|                            |                 | 0.40   | —    | 1.5   |      | 15                  |                         |                     |

Switching characteristics (unless otherwise noted,  $T_a = 25^\circ C$ ,  $V_{SS} = 0V$ ,  $C_L = 50pF$ )

| Parameter                          | Symbol           | Min. | Typ. | Max. | Unit | V <sub>DD</sub> (V) | Conditions | Measurement circuit |
|------------------------------------|------------------|------|------|------|------|---------------------|------------|---------------------|
|                                    |                  |      |      |      |      |                     |            |                     |
| Output rise time                   | t <sub>TLH</sub> | —    | 100  | —    | ns   | 5                   | —          | Fig.2               |
|                                    |                  | —    | 50   | —    |      | 10                  |            |                     |
|                                    |                  | —    | 40   | —    |      | 15                  |            |                     |
| Output fall time                   | t <sub>THL</sub> | —    | 100  | —    | ns   | 5                   | —          | Fig.2               |
|                                    |                  | —    | 50   | —    |      | 10                  |            |                     |
|                                    |                  | —    | 40   | —    |      | 15                  |            |                     |
| Propagation delay time, "L" to "H" | t <sub>PLH</sub> | —    | 125  | —    | ns   | 5                   | —          | Fig.2               |
|                                    |                  | —    | 60   | —    |      | 10                  |            |                     |
|                                    |                  | —    | 50   | —    |      | 15                  |            |                     |
| Propagation delay time, "H" to "L" | t <sub>PHL</sub> | —    | 125  | —    | ns   | 5                   | —          | Fig.2               |
|                                    |                  | —    | 60   | —    |      | 10                  |            |                     |
|                                    |                  | —    | 50   | —    |      | 15                  |            |                     |

## ● Measurement circuits

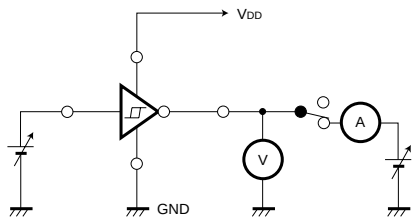


Fig.1 DC characteristics

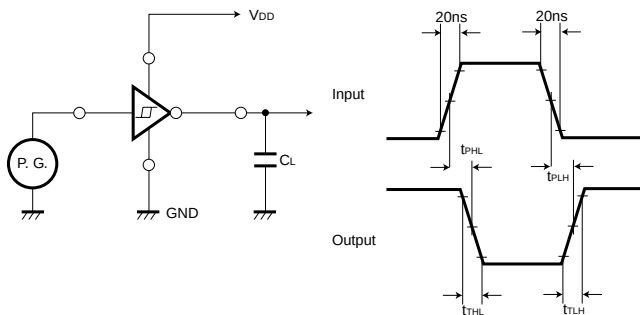


Fig.2 Switching characteristics

## ● Electrical characteristic curve


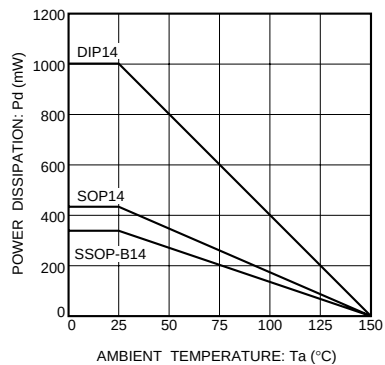


Fig.3 Power dissipation vs. Ta


## ● External dimensions (Units: mm)

BU4584B

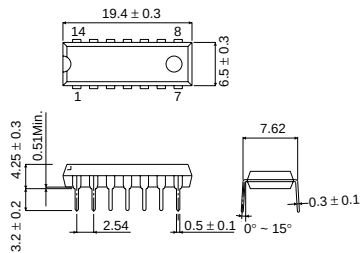


DIP14

BU4584BF

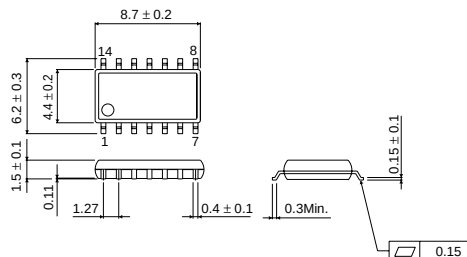

SOP14

BU4584BFV

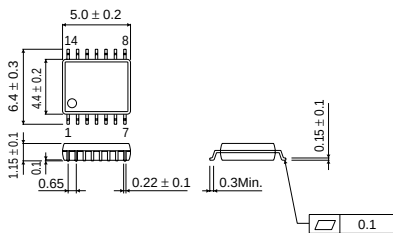

SSOP-B14