

Features


1 or 2 Pole 16 A Step relays for direct 35 mm rail (EN 50022) mounting

- 17.4 mm wide
- Test button with mechanical indicators
- Choice of 6 switching sequences
- AC coils and DC coils
- Identification label
- Possible to connect illuminated push buttons with the additional part 026.00
- 35 mm rail (EN 50022) mount
- Cadmium free contact material

20.21




- Single phase switch 1 NO (SPST-NO)
- 35 mm rail (EN 50022) mount



20.22, 24, 26, 28





- Double phase switch
- 35 mm rail (EN 50022) mount



20.23



- Double phase switch 1 NO+1 NC (SPST-NO+SPST-NC)
- 35 mm rail (EN 50022) mount



FOR UL HORSEPOWER AND PILOT DUTY RATINGS
SEE "General technical information" page V

Contact specification		20.21	20.22, 24, 26, 28	20.23
Contact configuration		1 NO (SPST-NO)	2 NO (DPST-NO)	1NO+1NC (SPST-NO+SPST-NC)
Rated current/Maximum peak current	A	16/30	16/30	16/30
Rated voltage/Maximum switching voltage V AC		250/400	250/400	250/400
Rated load AC1	VA	4,000	4,000	4,000
Rated load AC15 (230 V AC)	VA	750	750	750
Nominal lamp rating:incandescent (230 V)	W	2,000	2,000	2,000
compensated fluorescent (230 V)	W	750	750	750
uncompensated fluorescent (230 V)	W	1,000	1,000	1,000
halogen (230 V)	W	2,000	2,000	2,000
Minimum switching load	mW (V/mA)	1,000 (10/10)	1,000 (10/10)	1,000 (10/10)
Standard contact material		AgNi	AgNi	AgNi
Coil specification		20.21	20.22, 24, 26, 28	20.23
Nominal voltage (U _N)	V AC (50/60 Hz)	8 - 12 - 24 - 48 - 110 - 120 - 230 - 240		
	V DC	12 - 24 - 48 - 110	12 - 24 - 48 - 110	12 - 24 - 48 - 110
Rated power AC/DC	VA (50 Hz)/W	6.5/5	6.5/5	6.5/5
Operating range	AC	(0.85...1.1)U _N (50 Hz)/(0.9...1.1)U _N (60 Hz)		
	DC	(0.9...1.1)U _N	(0.9...1.1)U _N	(0.9...1.1)U _N
Technical data		20.21	20.22, 24, 26, 28	20.23
Mechanical life	cycles	300 · 10 ³	300 · 10 ³	300 · 10 ³
Electrical life at rated load in AC1	cycles	100 · 10 ³	100 · 10 ³	100 · 10 ³
Minimum/Maximum impulse duration		0.1s/1h (according to EN 60669)	0.1s/1h (according to EN 60669)	0.1s/1h (according to EN 60669)
Insulation between coil and contacts (1.2/50 μs)	kV	4	4	4
Ambient temperature range	°C	-40...+40	-40...+40	-40...+40
Protection category		IP 20	IP 20	IP 20
Approvals (according to type)		CE	PG	Y
		UL	UL	UL
		NF	RINA	UL

Ordering information

Example: 20 series relay, 35 mm rail (EN 50022) mount, double phase switch, 2 NO (DPST-NO) 16 A contacts, coil rated at 12 V DC, AgSnO₂ contacts.

2 0 . 2 2 . 9 . 0 1 2 . 4 0 0 0

Series

Type

2 = 35 mm rail (EN 50022) mount

No. of poles

1 = Single phase switch 1 NO (SPST-NO)

2 = Double phase switch 2 NO (DPST-NO)

3 = Double phase switch 1 NC+1 NO (SPST-NO+SPST-NC)

4 = 4 sequence double phase switch 2 NO (DPST-NO)

6 = 3 sequence double phase switch 2 NO (DPST-NO)

8 = 4 sequence double phase switch 2 NO (DPST-NO)

Contact material

0 = AgNi standard

4 = AgSnO₂

Coil voltage

See coil specifications

Coil version

8 = AC (50/60 Hz)

9 = DC

Technical data

Insulation

Dielectric strength

between supply and contacts V AC 3,500

between open contacts V AC 2,000

between adjacent contacts V AC 2,000

Other data

Power lost to the environment

with rated current and coil deenergised W 1.3 (20.21, 20.23, 20.28) 2.6 (20.22, 20.24, 20.26)

Screw torque

Nm 0.8 0.8

Max. wire size

	Coil terminals		Contact terminals	
	solid cable	stranded cable	solid cable	stranded cable
mm ²	1x4 / 2x2.5	1x2.5 / 2x2.5	1x6 / 2x4	1x4 / 2x2.5
AWG	1x12 / 2x14	1x14 / 2x14	1x10 / 2x12	1x12 / 2x14

If the coil is operated for a prolonged period of time, adequate ventilation of the relays must be provided - suggested gap of 9 mm between adjacent relays.

Coil specifications

DC version data


Nominal voltage U_N	Coil code	Operating range		Resistance R	Consumption I at U_N
V		U_{min} V	U_{max} V	Ω	mA
12	9.012	10.8	13.2	27	440
24	9.024	21.6	26.4	105	230
48	9.048	43.2	52.8	440	110
110	9.110	99	121	2,330	47

AC version data


Nominal voltage U_N	Coil code	Operating range		Resistance R	Consumption I at U_N (50 Hz)
V		U_{min} V	U_{max} V	Ω	mA
8	8.008	6.8	8.8	4	800
12	8.012	10.2	13.2	7.5	550
24	8.024	20.4	26.4	27	275
48	8.048	40.8	52.8	106	150
110	8.110	93.5	121	590	64
120	8.120	102	132	680	54
230	8.230	195.5	253	2,500	28
240	8.240	204	264	2,700	27.5

Type	Number of steps	Sequence			
		1	2	3	4
20.21	2				
20.22	2				
20.23	2				
20.24	4				
20.26	3				
20.28	4				

Wiring diagrams

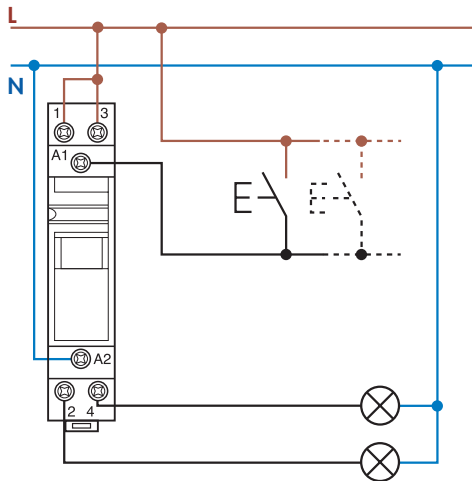


Example: 230 V AC supply voltage.

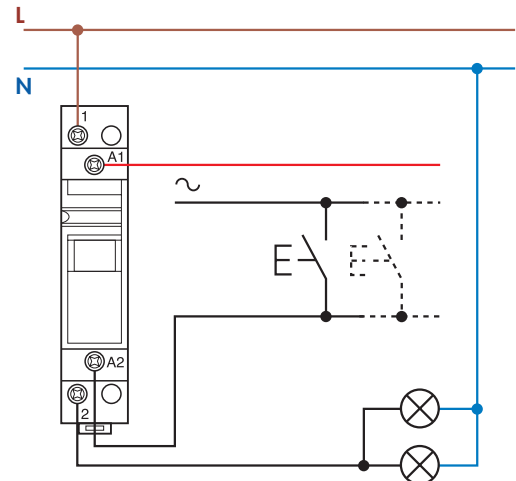

Example: 24 V AC supply voltage.


Accessories

Module for use with illuminated push-buttons

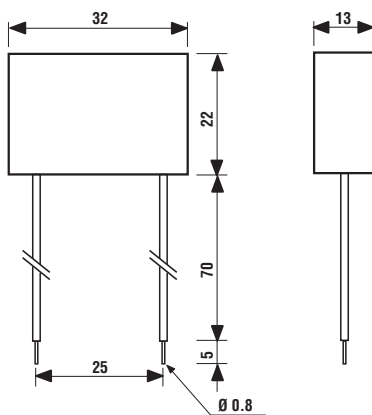

Type 026.00

Sealed construction, 7.5 cm insulated flexible wire termination.



Example of wiring diagram of type 026.00

This module is necessary when using between 1 and a maximum of 15 illuminated push buttons in the coil circuit (Each 1.5 mA max, 230 V AC). It must be connected in parallel to the coil of the relay.



020.24

Sheet of marker tags, plastic, 24 tags, 9x17 mm

020.24

