

# AMERICAN AUDIO

catalog vol.13



[www.americanaudio.us](http://www.americanaudio.us)

designed for the  
**Working DJ**

& Professional Audio Applications

## MCD-810

professional dual mp3/cd player

**NEW**



mp3

### MAIN FEATURES

- . Plays MP3 and CD discs
- . Folder Search
- . MP3 track listings
- . Digital FX: Scratch & BOP
- . Auto BPM Counter
- . Seamless Loop
- . Tempo Lock
- . Fader "Q" Start
- . 4 Sample Bank Buttons per side (5 sec. ea bank)
- . 5 (1 cue + 4 sample banks) b-trim
- . 10 seconds Anti Shock Protection (per side)
- . Flip Flop (Relay Playback)
- . Pitch Control (+/-4%, +/-8% or +/-16%)
- . Pitch Bend
- . Tap Sync Button
- . Advanced cueing with track search by frame
- . S/PDIF digital output for each player
- . Bright Vacuum Fluorescent Tube (VFT) display with Single/Continue, Time viewing and MP3 track listings
- . Reads CD and CD-R media
- . Save your favorite settings to internal memory
- . Update firmware via CD-ROM
- . Dimensions (LxWxH):
  - Player unit: 11.5" x 19" x 3.5"
  - Controller: 3" x 19" x 3.5"
- . Weight: 17 lbs.

## 8 REASONS TO UPGRADE TO AN AMERICAN AUDIO MP3/CD PLAYER:



1. Play up to 125 / 6.5 hours of high quality MP3 music per compact disc\*.
2. Fit your MP3 music library to 1/10 of your music CD discs - Increases mobility.
3. Create your own music discs with your "favorite mixes" or "most requested" songs.
4. Reads all MP3 formats
5. Reads CD, CD-R music files
6. Quick MP3 load/read time (quicker than competitive models)
7. American Audio MP3/CD players operate best when CDs are recorded at 128 kbps (typically CD quality).
8. All normal CD features such as pitch and effects work in MP3 mode

\*May vary depending on bit rate of your MP3 files.



## MCD-510

professional dual mp3/cd player



**NEW**

**mp3**

### MAIN FEATURES

- . Plays MP3 and CD discs
- . Fader "Q" Start
- . +10 track advance button
- . -10 back track button
- . 20 seconds Anti Shock Protection (per side)
- . Flip Flop (Relay Playback)
- . Pitch Control (+/-4%, +/-8% or +/-16%)
- . Pitch Bend
- . Advanced cueing with track search by frame
- . S/PDIF digital output for each player
- . Bright LCD display
- . Single/Continue and Time viewing
- . Reads CD and CD-R media
- . Update firmware via CD-ROM

- . Dimensions (LxWxH):  
Player unit: 10" x 19" x 3.5"  
Controller: 2.5" x 19" x 3.5" (2-spaces)
- . Weight: 15 Lbs.

PLAY UP TO **6.5** HOURS  
OF MP3 MUSIC PER DISC\*



## MCD-110

professional mp3/cd player



**NEW**

**mp3**

### MAIN FEATURES

- . Plays MP3 and CD discs
- . +10 track advance button
- . -10 back track button
- . 20 seconds Anti Shock Protection
- . Pitch Control (+/-4%, +/-8% or +/-16%)
- . Pitch Bend
- . Advanced cueing with track search by frame
- . S/PDIF digital output for each player
- . Bright LCD display
- . Single/Continue and Time viewing
- . Reads CD and CD-R media
- . Update firmware via CD-ROM

- . Dimensions (LxWxH):  
Player unit: 10" x 19" x 3.5" (2-spaces)
- . Weight: 9 lbs.



# VELOCITY MP3

professional dual mp3/cd player



PLAY UP TO **6.5** HOURS  
OF MP3 MUSIC PER DISC\*



## NEW MP3 FEATURES

- . Plays MP3, CD & CD-R discs
- . Quick MP3/CD recognition
- . Display show track listing and artist when a MP3 disc is played
- . Advanced cueing with track searching by frame (not by each second)
- . Advanced Track Search by track (song) title or by Folder Search
- . Fine Tune B.P.M. adjustment
- . Cue Point
- . Advance Track Launch

- . Instant start
- . Seamless loop
- . Fader "Q" Start
- . Reverse play
- . Digital output - S/PDIF

## MAIN FEATURES

- . "PowerTouch"\*\*, Touch sensitive interactive jog wheels
- . Digital Scratching 2.0 (Accurate Scratching)
- . 2 Scratching modes: Digital Scratch mode, Beat Juggle mode
- . 9 On-board FX: Scratch, Filter, Echo, Trans, Skid, Phase, Flanger, Pan, Bop
- . Effect layering
- . Digital B.P.M. counter: keeps digital FX in sync with music
- . 6 Preset Parameters settings for each FX
- . Tempo Lock (Master Tempo)
- . Lock out mode (Security feature)
- . Parameter Ratio adjustment knob
- . Parameter Time adjustment knob
- . Pitch Bend: +/-4%, +/-8%, or +/-16%
- . "Hyper" Pitch (up to +/-100%)
- . 3 Flash Start Sampler Buttons per side (7 second sample per button with or without a CD in drive)
- . Flash Cue
- . Slot Load Dual CD Player
- . Digital Anti-shock memory

## ADDITIONAL FEATURES

- . Volume control between music and sampler
- . FX MIX
- . Auto cue
- . Store 384 cue points or samples
- . Single/continuous play
- . Flip Flop (Relay playback between two decks)

\*\* (U.S. & foreign patents pending)

## SPECIFICATIONS

- . Dimensions  
MAIN UNIT: 19" x 10" x 3.5" (2 rack spaces)  
CONTROL UNIT: 19" x 2" x 7" (4 rack spaces)
- . Weight (total): 16 lbs. / 7.2 kgs.



## INSTRUCTIONAL VIDEO

The Velocity includes a free instructional video with tips on how to use your digital turntables!

## DCD-PRO1000

professional dual cd player



### MAIN FEATURES

- . "PowerTouch" , Touch sensitive interactive jog wheels (Patent pending)
- . Digital Scratching 2.0 (Accurate Scratching)
- . 2 Scratching modes: Digital Scratch mode, Beat Juggle mode
- . 9 On-board FX: Scratch, Filter, Echo, Trans, Skid, Phase, Flanger, Pan, Bop
- . Visual marker display: Reference point to view where the disc is playing
- . Effect layering
- . Digital B.P.M. counter: keeps digital FX in sync with music
- . 6 Preset Parameters settings for each FX
- . Tempo Lock (Master Tempo)
- . Parameter Ratio adjustment knob
- . Parameter Time adjustment knob
- . Pitch Bend:  $\pm 4\%$ ,  $\pm 8\%$ , or  $\pm 16\%$
- . "Hyper" Pitch (up to  $\pm 100\%$ )
- . 3 Flash Start Sampler Buttons per side  
(6 second sample per button with or without a CD in drive)
- . Flash Cue
- . Anti-shock memory
- . Instant start
- . Seamless loop
- . Fader Q Start
- . Reverse play
- . Black brushed aluminum face plate
- . Volume control between music and sampler
- . Mixer between music and sampler, can adjust pitches separately
- . FX MIX on the fly
- . Auto cue function (-48dB)
- . 3 sampler (cues) can be memorized
- . Selectable elapsed, remain and total remain time display
- . Single/continuous play
- . Flip Flop (Relay playback between both channels)

### SPECIFICATIONS

- . Dimensions (WxHxD):  
MAIN UNIT: 19" x 3.5" x 10" (2 rack spaces)  
CONTROL UNIT: 19" x 7" x 2" (4 rack spaces)
- . Weight (total): 23 lbs. / 8.6 kgs.
- . Power: AC 115/60Hz or 50Hz/230V switchable
- . Power Consumption: 25W
- . Frequency Response: 20-20KHz  $\pm 1$  dB
- . T.H.D.: 0.03%
- . S/N ratio: 86 dB
- . Over Sampling Rate: 8 times
- . D/A Conversion: 16 bit
- . Sampling Rate: 44.1k



### LCD DISPLAY

Track Indicator . Visual Marker  
Total/Remaining Time . Pitch/BPM  
Meter . Time Bar . Time Display  
Play, Pause & Cue Indicator  
Memory Bucket Indicator







*QStart*



## DCD-PRO610 MKII

professional dual cd player

### MAIN FEATURES

- . 6 On-board FX: 2 Filter, 2 Coast, Reverse Play & BOP
- . Tempo Lock
- . 20 seconds of Anti-Shock memory per side
- . Seamless Loop
- . Fader-Q-Start
- . DSP Technology – Digital Signal Processing
- . Digital Output (S/PDIF)
- . Instant Start
- . Pitch range:  $\pm 8\%$ ,  $\pm 12\%$ ,  $\pm 16\%$
- . Large bright LCD screen
- . 4 programmable cue points with instant start (4 sec. each bank)
- . Dimensions Control Unit (LxWxH)– 3-rack mount spaces: 2" x 19" x 3.5"
- . Dimensions Player Unit (LxWxH)– 2-rack mount spaces: 2" x 19" x 3.5"
- . Weight: 16 lbs.

**DJ DANNO**  
Elite Sound Entertainment  
Northridge, CA

# DCD-PRO310

professional dual cd player



## MAIN FEATURES

- . Fader "Q" Start
- . +10 track advance button
- . Mechanical Anti Skip Protection
- . Flip Flop (Relay Playback)
- . Pitch Control (+/-4%, +/-8% or +/-16%)
- . Pitch Bend
- . S/PDIF digital output for each player
- . Bright LCD display
- . Single/Continue and Time viewing
- . Reads CD and CD-R media
- . Dimensions (LxWxH):  
Player unit: 10" x 19" x 3.5" / 254 x 483 x 89mm  
Controller: 2.5" x 19" x 3.5" / 63.5 x 483 x 89mm
- . Weight: 15 lbs. / 6.8 kgs.

**QStart**

**NEW**

## MOBILE310 SYS

- . 1x DCD-PRO310 Dual CD Player
- . 1x Q-2411 Mixer
- . 1x TLC 8x4 Road Case
- . 1x DJ Headphones
- . 1x DJ Microphone
- . All component cables needed



**QStart**

## CDI 500 MP3

mp3 **NEW**

professional single mp3/cd player

### NEW MP3 FEATURES

- . Plays MP3, CD & CD-R discs
- . Display shows track (song) title and artist when a MP3 disc is played
- . Advanced cueing with track searching by frame (not by each second)
- . Advanced Track Search by track (song) title or by Folder Search
- . Quick MP3/CD recognition
- . Fine Tune B.P.M. adjustment
- . Advance Track Launch

### MAIN FEATURES

- . "PowerTouch™" - Touch sensitive interactive jog wheels
- . Touch Sensitive Adjustment (Patent pending)
- . 2 Scratching modes: Digital Scratch mode, Beat Juggle mode
- . Digital Scratching 2.0 (Accurate Scratching)
- . Tempo Lock . Instant Start . Reverse play
- . 9 On-board FX: Scratch, Filter, Echo, Trans, Skid, Phase, Flanger, Pan & Bop
- . Time & Ratio (wet/dry) adjustment for digital FX
- . FX sync adjustment . Effect layering
- . Visual marker display: Reference point to view where the disc is playing
- . Digital B.P.M. counter: keeps digital FX in sync with music
- . TAP Button for manual BPM
- . Anti Shock (30 sec.)
- . Seamless loop . Fader "Q" Start
- . +/- 4%, 8%, 16% & 100% "Hyper Pitch"
- . 3 flash start buttons with (5 second sample each button)
- . Recall memory of Q-Start and samples
- . Store up to 1500 cue points
- . Digital Output (S/PDIF)
- . Slot load CD drive
- . Flip Flop - Relay playback between two CD Players
- . Dimensions (LxWxH): 13.75" x 9.75" x 4.25" / 348x246x106 mm
- . Weight: 7 lbs. / 3.3 kgs.



## CDI-500 MP3 SYSTEM

**NEW**

- . 2 x CDI-500 MP3 CD Players
- . 1 x Q-D5 MKII Mixer
- . Case & component cables included





## CDI 300 MP3 NEW professional single mp3/cd player



### NEW MP3 FEATURES

- . Plays MP3, CD & CD-R discs
- . Display shows track (song) title and artist when a MP3 disc is played
- . Advanced cueing with track searching by frame (not by each second)
- . Quick MP3/CD recognition
- . Folder Search

### MAIN FEATURES

- . Digital Scratching 2.0 (Accurate Scratching)
- . Visual marker display: Reference point to view where the disc is playing
- . Anti Shock (10 sec.)
- . Seamless loop
- . Fader "Q" Start
- . 3 flash start buttons with (5 second sample each button)
- . Tempo Lock
- . Auto BPM Counter
- . Hyper Pitch (+/- 4%, +/-8%, +/-16%, +/-100%)
- . Digital output (S/PDIF)
- . Dimensions (LxWxH): 13.75" x 9.75" x 4.25" / 348x246x106 mm
- . Weight: 7 lbs. / 3.3 kgs.

\*May vary depending on bit rate of your MP3 files.



## PRO CDI-300 MP3 SYSTEM

- . 2 x CDI-300 MP3 CD Players
- . 1 x Q-D6 Mixer
- . Case & Component cables included



## CDI-300 SYSTEM

- . 2 x CDI-300 CD Players
- . 1 x Q-D6 Mixer
- . Case & Component cables included

**NEW**



**NEW**

## Q-3433 MKII

professional 19-inch mixer




**QStart**

### MAIN FEATURES

- . 4-channel
- . Individual
- . Fader
- . High quality replaceable Feather Fader plus for smooth, clean crossfading . Gain control for each channel
- . Bass, mid and treble control for each channel . 1 Zone Output . Zone/Booth volume, treble and bass control

## Q-SPAND MKII

professional 19-inch mixer



Input Jack  
On Front  
Panel

**QStart**



### MAIN FEATURES

- . 4-channel, 19-inch prof
- . WOW™ by SRS® button - Sonic enhancer with 3 dimensional sound . Mini plug input on face of mixer for use with MP3 players
- . Stereo

## Q-2411

professional 19-inch mixer

**QStart**




### MAIN FEATURES

- . 4-channel, 19-inch Professional DJ mixer . 3 Phono, 5 Line, 3 Aux & 2 Mic Inputs
- . Fader "Q" Start Compatible (with select American Audio CD Players) . Balanced XLR Outputs . 5 band EQ
- . Separate volume for each microphone . High Quality Feather Fader™ For Smooth, Clean Crossfades (Replaceable)
- . Dimensions (LxWxH): 7" x 19" x 3.75" . Weight: 7 lbs.

## Q-2422 MKII

professional 19-inch mixer

**QStart**



### MAIN FEATURES

- . 3-channel, 19-in
- . Mini plug input on face of mixer for use with MP3 players . Bass, Mid & Tremble Control and separate volume for Mics
- . Fader "Q" St
- . Balanced XLR outputs . Recessed back panel . Volume, bass, & treble control for second zone
- . 3-band EQ per channel (Bass, Mid & Treble) . Independent Pan & Gain on each channel . Trim output adjustment on rear
- . Improved mic circuitry and longer lasting line faders . Dimensions: 7" L x 19" W x 3.8" H . Weight: 7.5 lbs.



## Q-D6 professional mixer

### MAIN FEATURES

- . 3-channel Pro DJ Mixer
- . 2 Phono, 3 Lines, 2 Aux & 1 Microphone input
- . Mini plug input on face of mixer for use with MP3 players
- . Balanced Outputs
- . Fader "Q" Start Compatible
- . Gain, Treble, Mid & Bass control for each channel (-26 dB Rotary Kills)
- . DJ Mic with Volume, Treble, Bass and Talkover control
- . Stream flow™ LED Master Level Indicators
- . Cue Mixing, Cue Level and Master Level Control
- . High output to headphones
- . Extremely clean signal to noise ration
- . Dimensions (WxDxH): 10" x 12.25" x 3.25"
- . Weight: 6.5 lbs.

NEW

QStart



Input Jack  
On Front  
Panel



NEW

## Q-D5MKII professional mixer

QStart

### MAIN FEATURES

- . 2 Phono, 2 Lines, 2 Aux & 1 Mic input
- . Optical Crossfader (tested over 1 million times)\*
- . Balanced XLR outputs . Fader "Q" Start
- . Cross Fader curve knob (short to long crossfade) with reverse crossfade button
- . Independent curve for channels 1 & 2 (short to long curve) with reverse button
- . Gain, Treble, Mid & Bass control for each channel
- . -30 dB Rotary Kills for Treble, Mid & Bass
- . 100% cut buttons for Treble, Mid & Bass
- . Dimensions (LxWxH): 3.25" x 12.25" x 10"
- . Weight: 7 lbs.

\*The optical fader was factory tested over 1 million times back-and-forth and never quit working!

## Q-D1 MKII professional mixer

### MAIN FEATURES

- . 2 Phono, 2 Line, 1 Mic inputs
- . Fader "Q" Start ( crossfade directly to a pre-programmed cue point (when used with an American Audio Q Series Mixer).
- . Gain, treble and bass control for each channel
- . Master, Microphone and Cue Level volume control
- . Cue monitoring between channels
- . 1/4" jacks for Mic & Phono input
- . 9V AC power supply included
- . Dimensions (LxWxH): 9.5" x 7.5" x 4" / 236x192x105mm
- . Weight: 4 lbs. / 2 kgs.

NEW



## HTD 4.5

### 4.5kg torque turntable

#### MAIN FEATURES

- . Massive 4.5kg of torque (industry standard is 2.7kg.)
- . Dual Start/Stop buttons: easy access for scratch DJs who use their turntables "Battle Style"
- . Super fast or very slow start and stop with adjustable "Start" and "Stop" controls
- . Pitch slider with "Quartz Lock"
- . 33 / 45 / 78 rpm speeds
- . +/- 10%, +/- 20% or +/- 50% pitch adjustment (locks in precision 33, 45 or 78 speed control)
- . Reverse play . Dust cover not available
- . Headshell included (needle or cartridge not included)
- . Dimensions (LxWxH): 13.75" x 17.75" x 3.5"
- . Weight: 29 lbs.



#### TT-HEADSHELL

- . Headshell for turntables



#### SLIPMAT/AA

- . High quality, thick black felt slip mats with metallic silver American Audio logo
- . Sold in pairs; made of anti-static material
- . Allows for quick back cueing and easy record control

## RUGGED PROFESSIONAL POWER AMPLIFIERS!

**NOW WITH  
HIGHER POWER!**



### V1001plus

### V2001plus

### V3001plus

#### Output Power

2 ohms, 1 khz 1% THD  
4 ohms, 1 khz 1% THD  
8 ohms, 1 khz 1% THD  
(Bridged Mode, mono)  
4 ohms, 1 khz 1% THD  
8 ohms, 1 khz 1% THD

450W RMS per channel  
350W RMS per channel  
230W RMS per channel  
  
890W RMS per channel  
700W RMS per channel

650W RMS per channel  
420W RMS per channel  
310W RMS per channel  
  
1300W RMS per channel  
940W RMS per channel

1020W RMS per channel  
670W RMS per channel  
410W RMS per channel  
  
2050W RMS per channel  
1360W RMS per channel

#### Total Harmonic Distortion (THD)

20Hz-20kHz, @ rated output power, 8 ohms

Less than 0.1%

Less than 0.1%

Less than 0.1%

#### Input Sensitivity & Impedance

@ rated output power, 4 ohms

1.0v rms (0 dBv)

1.0v rms (0 dBv)

1.0v rms (0 dBv)

#### Dimensions & Weight

Height  
Width  
Depth  
Weight

3.5" (88cm)  
19" (48.3cm)  
15.9" (40.5cm)  
26.4 lbs (12 kg)

3.5" (88cm)  
19" (48.3cm)  
15.9" (40.5cm)  
30 lbs. (13.6kg)

3.5" (88cm)  
19" (48.3cm)  
15.9" (40.5cm)  
31 lbs. (14kg)

#### Frequency Response

±.5dB, 1W RMS 8 ohms  
±3dB, 1W RMS 8 ohms

10Hz - 28 kHz  
5Hz - 80 kHz

10Hz - 40 kHz  
20Hz - 20 kHz

10Hz - 40 kHz  
20Hz - 20 kHz

#### Hum & Noise

Below rated output, 8 ohms

100 dB, unweighted

100 dB, unweighted

100 dB, unweighted

#### Signal to Noise Ratio

@ 4 ohms full power

unweighted, 104 dB  
"A" weighted

unweighted, 60 dB  
"A" weighted

unweighted, 60 dB  
"A" weighted

#### Slew Rate

90v/usec

90v/usec

25v/usec

#### Damping Factor @ 8Ω

240

240

400

#### Protection Circuit

DC output protection  
Overload protection  
Short circuit protection  
On & Off protection

DC output protection  
Overload protection  
Short circuit protection  
On & Off protection

DC output protection  
Overload protection  
Short circuit protection  
On & Off protection

#### Special Features

Front panel reset

Front panel reset

Sub-Woofer  
Crossover  
Contractor Smart™ Feature\*\*  
Limiter

#### Power Consumption

@ rated output power, 8 ohms

5A @ 120V AC

7A @ 120V AC

10A @ 120V AC

#### Turn-On Thump Protection

Yes

Yes

Yes

#### Cooling System

Dual 1 speed fans  
& heatsink

Dual 2 speed fans  
& heatsink

Dual 2 speed fans  
& heatsink

\*\*Contractor Smart™ = Switch on rear panel to disable front volume controls (Models V3001 thru V6001 only)





NEW

**EXCLUSIVE  
CONTRACTOR  
SMART™ FEATURE\*\***

## V4001plus

## V5001plus

## V6001plus

Output Power

2 ohms, 1 khz 1% THD	1530W RMS per channel	2150W RMS per channel	2530W RMS per channel
4 ohms, 1 khz 1% THD	1090W RMS per channel	1500W RMS per channel	1920W RMS per channel
8 ohms, 1 khz 1% THD (Bridged Mode, mono)	660W RMS per channel	980W RMS per channel	1260W RMS per channel
4 ohms, 1 khz 1% THD	3000W RMS per channel	4250W RMS per channel	5100W RMS per channel
8 ohms, 1 khz 1% THD	2170W RMS per channel	3100W RMS per channel	3650W RMS per channel
<u>Total Harmonic Distortion (THD)</u> 20Hz-20kHz,	Less than 0.1% @ 4 Ohms	Less than 0.03% @ 4 Ohms	Less than 0.03% @ 4 Ohms

Input Sensitivity & Impedance

@ rated output power, 8 ohms	1.0v rms (0 dBv)	1.0v rms (0 dBv)	1.0v rms (0 dBv)
------------------------------	------------------	------------------	------------------

Dimensions & Weight

Height	3.5" (88cm)	5.25" (13.3cm)	5.25" (13.3cm)
Width	19" (48.3cm)	19" (48.3cm)	19" (48.3cm)
Depth	15.9" (40.5cm)	15.9" (40.5cm)	15.9" (40.5cm)
Weight	31 lbs. (14kg)	62 lbs. (28kg)	62 lbs. (28kg)

Frequency Response

±1dB, 1W RMS 8 ohms	10Hz - 40 kHz	10Hz - 35 kHz	10Hz - 35 kHz
±0.3dB, @rated output, 8 ohms	20Hz - 20 kHz	5Hz - 85 kHz	5Hz - 85 kHz

Hum & Noise

Below rated output, 8 ohms	100 dB, unweighted	100 dB, unweighted	100 dB, unweighted
----------------------------	--------------------	--------------------	--------------------

Signal to Noise Ratio

>100dB	>100dB	>100dB
--------	--------	--------

Slew Rate

25v/usec	25v/usec	25v/usec
----------	----------	----------

Damping Factor @ 8Ω

400	400	500
-----	-----	-----

Protection Circuit

DC output protection Overload protection Short circuit protection On & Off protection	DC output protection Overload protection Short circuit protection On & Off protection	DC output protection Overload protection Short circuit protection
--	--	---

Special Features

Sub-Woofer Crossover Contractor Smart™ Feature** Limiter	Sub-Woofer Speakon plugs LED mode indicator Crossover 20-200Hz Contractor Smart™ Feature**	Sub-Woofer Speakon plugs LED mode indicator Crossover 20-200Hz Contractor Smart™ Feature**
---	--	--

Power Consumption

120V AC / 240V AC	10A / TBA (8 ohms)	45A / 22.5A (4 Ohms)	53A / 25.5A (4 Ohms)
-------------------	--------------------	----------------------	----------------------

Turn-On Thump Protection

Yes	Yes	Yes
-----	-----	-----

Cooling System

2 dual speed fan & heatsink	2 dual speed fan & heatsink	2 dual speed fan & heatsink
--------------------------------	--------------------------------	--------------------------------



## QUALITY, AFFORDABLE & RELIABLE POWER AMPLIFIERS FOR THE WORKING PROFESSIONAL.

**NEW**

	VLP300	VLP600	VLP1500
<b>Output Power</b> 4 ohms, 1 khz 0.1% THD 8 ohms, 1 khz 0.1% THD (Bridged Mode, mono) 8 ohms, 1 khz 0.1% THD	150W RMS per channel 100W RMS per channel  300W RMS per channel	300W RMS per channel 200W RMS per channel  600W RMS per channel	750W RMS per channel 500W RMS per channel  1500W RMS per channel
<b>Total Harmonic Distortion (THD)</b> 20Hz-20kHz, @ rated output power, 8 ohms	Less than 0.1%	Less than 0.1%	Less than 0.1%
<b>Impedance</b> Balanced / Unbalanced	20K Ohms / 10K Ohms	20K Ohms / 10K Ohms	20K Ohms / 10K Ohms
<b>Dimensions &amp; Weight</b> Height Width Depth Weight	1.75" (44cm) 19" (48.3cm) 13.25" (33.6cm) 24 lbs (11 kg)	3.5" (88cm) 19" (48.3cm) 14" (36cm) 33 lbs. (15kg)	3.5" (88cm) 19" (48.3cm) 14" (36cm) 42 lbs. (19kg)
<b>Frequency Response</b> ± 1dB, 1W RMS 8 ohms	20Hz - 20 kHz	20Hz - 20 kHz	20Hz - 20 kHz
<b>Slew Rate</b>	15v/usec	15v/usec	15v/usec
<b>Damping Factor @ 8Ω</b>	260	300	300
<b>Cooling System</b>	2 individual fans	2 individual fans	2 individual fans
<b>Special Features</b>	High/Low Pass Filter Input Sensitivity Selector Ground Lift	High/Low Pass Filter Input Sensitivity Selector Ground Lift Limiter	High/Low Pass Filter Input Sensitivity Selector Ground Lift Limiter

NOTE - 1 Rackspace = Approx. 1.75"

## PDP-850

power distribution panel



LED Technology

- . 7 protected switched A/C grounded outlets on rear of unit & 1 A/C unswitched outlet on rear of unit . Dual L.E.D. pop-out lights with dim control knob
- . 1 A/C outlet switched on front of panel . 15A per outlet/20A protection breaker switch on front panel . Protection: 20A breaker
- . USB rec

## PDP-950

power distribution panel



LED Technology

- . 7 protected switched A/C grounded outlets on rear of unit & 1 A/C unswitched outlet on rear of unit
- . 1 A/C outlet switched on front of panel . Incoming Line Voltage Meter . 15A per outlet/20A protection breaker switch on front panel
- . Dual L.E.D.
- . RFI and surge protection . Dimensions: 19" x 1.75" x 6.5" / 482x44x165mm - single space rack mount . Weight: 7 lbs.

## dB-DISPLAY

decibel indicator



- . Designed to set in an amp rack to view your decibel level . Creates a great light show in your amp rack
- . Display progresses from green through amber to red . Sensitivity adjustment on both left and right channels
- . 2 separate modes: dot and bar . Includes a 12V power supply . Power Supply: 12V DC . Line Inputs: Left & Right RCA
- . Line Outputs: Left & Right RCA . 1 rack mount space . Weight: 3 lbs.

## PC-100/A

power center



- . Larger easy to access buttons . A/C power center designed to eliminate extension cords and messy wires
- . 8
- . Ideal for switching lights and sound equipment . 6 ft. power cord . 120V
- . Maximum load: 15 amps or 1800 watts . 1 rack mount space . Weight: 4 lbs.





## HP700 dj headphones

- . Comfortable, sturdy high-powered 3500 mW headphones
- . Ultra dynamic range with great sounding high and lows
- . Flexible housing design allows for double or single ear monitoring; folds up for easy transport
- . Input: Mini plug with two screw-on 1/4" adapters
- . Speaker drivers: 57mm

### Specifications:

- . Driver Unit: 57 mm diameter . Max Power: 3500mW
- . Impedance: 64 Ohms
- . Frequency Response: 5Hz to 30KHz
- . Sensitivity: 107dB (+/-3dB) (S.P.L. at 1 KHz)
- . Cord Length: 9 feet/3 meters

Headphone bag  
(included)



"Straight" 1/4" adapter (included)



"Right Angle" 1/4" adapter (included)




## HP500 dj headphones

*"... the American Audio HP 500 phones take the nod in the 'all-purpose phones at a great price' category."*  
- Mobile Beat Magazine

- . Comfortable, sturdy high powered headphones
- . Includes 1 set of extra earpads and a headphones bag
- . Flexible housing design allows for double or single ear monitoring; folds up for easy transport
- . Replaceable earpads - Easy to snap on
- . Input: Mini plug with right angle 1/4" adapter
- . Speaker drivers: 57mm

2-in-1 adapter:  
Mini or 1/4" plug (included)



Headphone bag  
(included)



Replaceable headphone  
earpads (included)

WR-UHF3219HL



WR-UHF3219HH

- . 1 Receiver
- . 2 Handheld Microphones

WR-UHF3219LL

- . 1 Receiver
- . 2 Livelier Microphones

## WR-UHF3219 **NEW**

### wireless microphone

Two Great Wireless Microphones in one professional package!

#### MAIN FEATURES

- . Two receivers
- . 32 Selectable UHF Channels (16ch per Channel)
- . Large LCD screen provide easy channel readout
- . Dual antennas can be front or rear mounts
- . Dual XLR outputs.
- . Dual volume controls
- . 1 Rackmount space

#### HANDHELD MIC FEATURES

- . Professional cardioid mic capsule
- . LCD Battery strength display
- . LCD channel display

#### BELT PACK FEATURES

- . High quality livelier mic
- . Professional Mini-XLR type connector
- . Build for years of trouble free operation
- . LCD Battery strength display
- . LCD channel display

## WR90E

### wireless microphone

#### MAIN FEATURES

- . VHF Wireless microphone system with Built-in Adjustable Echo
- . Available in 4 different frequencies
- . Balanced and unbalanced connections.
- . Dual antenna system for reliable reception
- . Receiver Dimensions (LxWxH): 3.75 x 10.25 x 1.75
- . System Weight: 1 lbs.



## DJM-600B

### microphone

#### MAIN FEATURES

- . 600 Ohm hi-fidelity, uni-directional dynamic microphone . Low noise - Low distortion
- . Includes XLR to 1/4" mic cable and protective case . ON-OFF switch
- . Durable, protective case with padded microphone holder . XLR connection
- . Great for DJ's, karaoke, churches, lecturing, or anywhere a quality microphone is needed
- . Frequency Response: 50 - 13,000Hz. . Direction: Cardioid pattern

## DJM-200B

### microphone

#### MAIN FEATURES

- . 600 Ohm microphone . Low noise - Low distortion
- . Includes XLR to 1/4" mic cable . ON-OFF switch . XLR connection
- . Great for DJ's, karaoke, churches, lecturing, or anywhere a quality microphone is needed
- . Frequency Response: 50 - 13,000Hz. . Direction: Cardioid pattern

## WM-UHF16

### 16 channel wireless microphone

- . 16 selectable UHF frequencies
- . 1 Mic & 1 Receiver
- . On/Off/Mute control on mic
- . Includes small tool inside mic to change frequencies

#### MAIN FEATURES

- . Outputs: XLR balanced & 1/4" unbalanced . Range up to 150 ft.
- . Freq. channel: 471.000 - 481.650MHz . 12V DC Power Supply included
- . S/N ratio more than 95db
- . System Weight: 1.5 lbs.
- . On & Low Battery LED indicators



## TRI PACK II

### powered subwoofer & satellite speaker system

#### TRI PACK II SYSTEM INCLUDES

- . Two x 8", 2-way satellite speakers
- . One x 15" Sub woofer
- . Component cables included
- . Securing strap included to secure speakers during transport
- . Satellite speakers stack onto wheeled sub woofer for convenient, easy transport
- . Speaker stands not included

#### TRI PACK II SUBWOOFER SPECIFICATIONS

- . 15", Sub Woofer with built-in 3-channel amplifier
- . Built-in adjustable Electronic Crossover allows system flexibility
- . Built-in wheels and handles for easy transportation
- . Sub woofer supplies power to satellites
- . Power handling: 300W RMS
- . Frequency response: 40~500Hz
- . Crossover frequency: 40 ~ 500Hz adjustable
- . Component: 15" woofer (4 Ohm)
- . Net weight: 93 lbs. / 42 Kgs.
- . Dimensions (LxWxH): 28" x 21.5 x 23" / 710 x 545 x 585 mm

#### TRI PACK II SATELLITE SPEAKER SPECIFICATIONS

- . 8", 2-way satellite speaker
- . Built-in pole socket for stand
- . Lightweight cabinet with handle for easy transport
- . Single speakon input
- . Power handling: 180W RMS
- . Sensitivity: 96dB@1W/1M
- . Frequency response: 80~19k Hz
- . Nominal impedance: 4 Ohm
- . Crossover frequency: 3500Hz
- . Component: 8" woofer (4 Ohm) + 1" HFD
- . Weight: 21 lbs. / 9.5 kgs.
- . Dimensions (LxWxH): 23.5" x 15.3" x 23" / 600 x 390 x 585mm



#### NEW FEATURES INCLUDE:

- . Recessed back panel and knobs!
- . New high power mid-range speakers with wider frequency response!
- . Top cabinet fits snugger when stacked on sub woofer!

NEW

System is stackable and includes heavy duty caster wheels for easy transport

Tripod stands sold separately

#### TRI PACK T-BAR:

Pole mount T-Bar (model: TBAR TPL) to hang satellite speakers from subwoofer (sold separately). Works with Tri Pack or Tri Pack Live

NEW



## TRI PACK LIVE

### powered subwoofer & satellite speaker system

#### TRI PACK LIVE SUBWOOFER FEATURES:

- . 10-inch, Sub Woofer with built-in 3-channel amplifier
- . Power handling: 300W RMS
- . Frequency Response: 30-250 Hz
- . Nominal Impedance: 4 Ohms
- . Microphone input with Volume Control
- . Auxiliary input with Volume Control
- . Sub woofer supplies power to satellites
- . Weight: 62 lbs. / 28 Kgs
- . Dimensions (LxWxH): 17" x 14" x 19.75" / 430 x 360 x 500mm

#### TRI PACK LIVE SATELLITE FEATURES:

- . 6.5-inch woofer + 1-inch tweeter
- . Power handling: 50W RMS
- . Frequency Response: 150-20 Khz
- . Nominal Impedance: 4 Ohms
- . Crossover Frequency: 3500 Hz
- . Weight: 13 lbs. / 6 Kgs
- . Dimensions (LxWxH): 14" x 8.25" x 10" / 360 x 210 x 250mm

#### TRI PACK LIVE SYSTEM INCLUDES:

- . 2 x 6.5-inch, 2-way satellite speakers
- . 1 x 10-inch Sub woofer
- . Component cables included

NEW



Tripod stands sold separately





## DLS-15P

### powered speaker

#### SPECIFICATIONS


- . High Powered 15-inch, 2-way speaker
- . Die cast woofer with 3-inch voice coil
- . High compression 1.75" driver
- . Built-in high-powered amplifier system
- . ABS nylon fiber cabinet with handle
- . One XLR & one RCA line input
- . Two microphone inputs (XLR & 1/4" stereo) with separate microphone volume control
- . Treble, bass and volume output control
- . Trapezoidal design
- . Flyable & stand mountable
- . Floor monitor brackets included
- . 120v/220V switchable
- . Sensitivity: 109 dB/m/w
- . Dimensions (LxWxH): 13.6" x 16.5" x 26.4
- . Weight: 61 lbs.

## SPS-1B

### speaker stand

#### SPECIFICATIONS

- . Sturdy Aluminum speaker stand tripod
- . 80 pound capacity with socket mounting bracket to attach to speaker
- . Recommended maximum height is 6 ft.
- . Weight: 6 lbs.
- . Pipe diameter: 1 3/8"

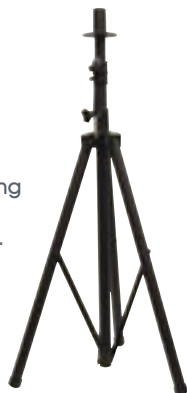

## DLS-15

### dj speaker

#### SPECIFICATIONS

- . High Powered 15-inch, 2-way speaker
- . Die cast woofer with 3-inch voice coil
- . High compression 1.75" driver
- . ABS nylon fiber cabinet with handle
- . Speakon line input
- . Trapezoidal design
- . Flyable & stand mountable
- . Floor monitor brackets included
- . Sensitivity: 109 dB/m/w
- . Dimensions (LxWxH): 13.6" x 16.5" x 26.4
- . Weight: 55 lbs.



## Z-APX/B

- . Heavy duty bolt for securing speakers



## Z-APX/H

- . Heavy duty eye-hook for suspending speakers



## APX-B

### speaker carry bag

#### FEATURES

- . Rugged speaker bag with rollers, adjustable handle & heavy duty zipper
- . Move speakers with ease
- . Fits: DLS-15, DLS-15P, APX-152, APX-Power Pro, PXI Series & various other brand speakers



## NEW PSW 15P / PSW 15

### powered & non-powered subwoofers

#### PSW 15P SPECIFICATIONS

- . 15-inch sub woofer with built-in 300W amplifier
- . Dual inputs (XLR/1/4")
- . XLR Balanced inputs
- . XLR line outputs
- . Built-in adjustable Electronic Crossover
- . Built-in pole mount socket
- . Built-in heavy duty carrying handle
- . Attached heavy-duty rubber feet
- . Power rating: 300W RMS - 1000W peak power
- . Frequency response: 50~500Hz
- . Component: 15" woofer (4 Ohm)
- . Dimension (LxWxH): 23" x 21.7" x 26" / 590 x 550 x 665mm
- . Weight: 84 lbs. / 38 kgs

#### PSW 15 SPECIFICATIONS

- . 15-inch sub woofer (no amplification)
- . Speakon input and output
- . Built-in pole mount socket
- . Built-in heavy duty carrying handle
- . Attached heavy duty rubber feet
- . Sensitivity: 97dB@1W/1M
- . Frequency response: 40~350 Hz
- . Nominal impedance: 8 Ohm
- . Component: 15" woofer (8 Ohm)
- . Dimension (LxWxH): 23" x 21.7" x 26" / 590 x 550 x 665mm
- . Weight: 74 lbs. / 33.5 Kgs

NEW



PXI Series Hanging bracket for wall or truss mounting. Available for each PXI model (sold separately)



## PXI SERIES

professional powered loud speakers

### PXI-8P SPECIFICATIONS

- . High powered 8-inch, 2-way speaker
- . 100w Built-in bi-amplifier system
- . Electronic crossover
- . ABS nylon fiber cabinet with handle
- . XLR line inputs
- . Sensitivity:  $90 \pm 2\text{dB/m/w}$
- . Frequency response: 50-17KHz (-10db)
- . Volume output control
- . Trapezoidal design
- . Flyable & stand mountable
- . Blue LED "On Indicator" on front of unit
- . Dimensions (LxWxH): 8" x 11" x 15.5" / 213 x 282 x 393mm
- . Weight: 24 lbs. / 8.9 kgs.
- . Mounting bracket (PXI BR8) sold separately

### PXI-10P SPECIFICATIONS

- . High powered 10-inch, 2-way speaker (with 40oz magnet)
- . Built-in 200w high-powered bi-amplifier system
- . 1" compression driver
- . Electronic crossover
- . ABS nylon fiber cabinet with handle
- . One XLR & one RCA line input
- . Two microphone inputs (XLR & 1/4" stereo) with separate microphone volume control
- . Sensitivity:  $94 \pm 2\text{dB/m/w}$
- . Frequency response: 50-17KHz (-10db)
- . Treble, bass and volume output control
- . Trapezoidal design
- . Flyable & stand mountable
- . Blue LED "On Indicator" on front of unit
- . Dimensions (LxWxH): 10" x 13" x 18.5" / 260 x 335 x 472mm
- . Weight: 31 lbs. / 14 kgs.
- . Mounting bracket (PXI BR10) sold separately

### PXI-12P SPECIFICATIONS

- . High Powered 12-inch, 2-way speaker (12" Flat wound cast frame woofer with 70oz magnet)
- . Built-in 300w high-powered bi-amplifier system
- . 1" compression driver
- . Electronic crossover
- . ABS nylon fiber cabinet with handle
- . One XLR & one RCA line input
- . Two microphone inputs (XLR & 1/4" stereo) with separate microphone volume control
- . Sensitivity:  $96.5 \pm 2\text{dB/m/w}$
- . Frequency response: 40-17KHz (-10db)
- . Treble, bass and volume output control
- . Trapezoidal design
- . Flyable & stand mountable
- . Blue LED "On Indicator" on front of unit
- . Dimensions (LxWxH): 12" x 15.5" x 22" / 310 x 400 x 554mm
- . Weight: 53.5 lbs. / 20 kgs.
- . Mounting bracket (PXI BR12) sold separately

### PXI-15P SPECIFICATIONS

- . High-Powered 15-inch, 2-way speaker (Flat wound cast frame woofer with 80oz magnet)
- . Built-in 400w high-powered bi-amplifier system
- . 1" compression driver
- . Electronic crossover
- . ABS nylon fiber cabinet with handle
- . One XLR & one RCA line input
- . Two microphone inputs (XLR & 1/4" stereo) with separate microphone volume control
- . Sensitivity:  $97.4 \pm 2\text{dB/m/w}$
- . Frequency response: 40-17KHz (-10db)
- . Treble, bass and volume output control
- . Trapezoidal design
- . Flyable & stand mountable
- . Blue LED "On Indicator" on front of unit
- . Dimensions (LxWxH): 14" x 16.5" x 25.5" / 360 x 420 x 655mm
- . Weight: 68 lbs. / 25.5 kg.
- . Mounting bracket (PXI BR15) sold separately

## FACTORY BUNDLES



**NEW**

### CDI 300 TRI PACK II

cd player/powered speaker system

**SYSTEM INCLUDES**

- . **1x CDI 300 SYS** (2x CDI 300 CD Players, 1x Q-D6 Mixer, 1x Road Case, All component cables needed)
- . **1x TRI PACK SYS** (1x 15" Powered Subwoofer, 2 x 8" Satellite Speakers)
- . **2x SPS-1B** (Speaker Stands)
- . **2x MC-25** (25 ft. Speaker Cables)



### CDI 300 DLS

**NEW**

### cd player/powered speaker system

**SYSTEM INCLUDES**

- . **1x CDI 300 SYS** (2x CDI 300 CD Players, 1x Q-D6 Mixer, 1x Road Case, All component cables needed)
- . **2x DLS 15P** (15" Powered Speakers)
- . **2x SPS-1B** (Speaker Stands)
- . **2x MC-25** (25 ft. Speaker Cables)



**NEW**

### MOBILE 310 TRI PACK II

cd player/powered speaker system

**SYSTEM INCLUDES**

- . **1x Mobile 310 SYS** (1x DCD-PRO310 Dual CD Player, 1x Q-2411 Mixer, 1x Road Case, 1x DJ Headphones, 1x DJ Microphone, All component cables needed)
- . **1x TRI PACK SYS** (1x 15" Powered Subwoofer, 2 x 8" Satellite Speakers)
- . **2x SPS-1B** (Speaker Stands)
- . **2x MC-25** (25 ft. Speaker Cables)



**NEW**

### MOBILE 310 DLS

cd player/powered speaker system

**SYSTEM INCLUDES**

- . **1x Mobile 310 SYS** (1x DCD-PRO310 Dual CD Player, 1x Q-2411 Mixer, 1x Road Case, 1x DJ Headphones, 1x DJ Microphone, All component cables needed)
- . **2x DLS 15P** (15" Powered Speakers)
- . **2x SPS-1B** (Speaker Stands)
- . **2x MC-25** (25 ft. Speaker Cables)





## ETLC-8x4

### MAIN FEATURES

- . 19 inch rack mount: 8 spaces Top, 4 spaces Bottom
- . Sturdy plywood construction
- . Convenient, easy to carry handles
- . Rugged & "roadworthy"
- . Detachable cover/lid (durable nylon with polyethylene center)
- . Dimensions(LxWxH): 20" x 20" x 17"
- . Weight: 18 lbs.
- . Equipment sold separately



## ETLC-9x6

### MAIN FEATURES

- . 19 inch rack mount: 9 spaces Top, 6 spaces Bottom
- . Sturdy plywood construction
- . Convenient, easy to carry handles
- . Rugged & "roadworthy"
- . Detachable cover/lid (durable nylon with polyethylene center)
- . Dimensions(LxWxH): 20" x 21" x 19"
- . Weight: 21 lbs.
- . Equipment sold separately



## TLC-8x14

### MAIN FEATURES

- . An easier way to haul around your audio setups, while keeping your gear organized and secure
- . A rackmount case on wheels that's designed to hold a complete DJ audio setup—from mixers and CD players to amplifiers and everything in between
- . 19-inch rack mount - 8 spaces Top, 14 spaces Bottom
- . Adjustable top rack
- . Made of lightweight, durable plastic
- . Rugged "roadworthy" construction: 3 detachable lids (top, front and back), metal corners, lock tight latches
- . Dimensions(LxWxH): 23" x 21.5" x 38"
- . Weight: 56 lbs. (unloaded)
- . Equipment not included

## TLC-10x6

### MAIN FEATURES

- . Top load Amp Rack combo
- . 19 inch rack mount: 10 spaces Top, 6 spaces Bottom
- . Made of lightweight, durable plastic
- . Convenient, easy to carry handles
- . Rugged "roadworthy" construction:
- . 3 detachable lids (top, front and back), with lock tight latches
- . Dimensions(LxWxH): 23.25" x 21.75" x 23.25"
- . Weight: 24lbs
- . Equipment sold separately



## CDI CASE

### MAIN FEATURES

- . Heavy duty roadcase for the CDI 500 and CDI 300
- . Fits two CDI 500s or CDI 300 CD Players & most 2-channel or 3-channel mixers
- . Dimensions (LxWxH): 33.5" x 10" x 19.5"
- . Weight: 27 lbs. (empty)
- . CD Players and mixer sold separately

## PROTEK TT PRO

### MAIN FEATURES

- . Heavy duty turntable hardcase with sturdy brackets and ball corners
- . Fits one American Audio or other popular turntable brands
- . Available colors: Black only
- . Dimensions(LxWxH): 17" x 21" x 9.25"
- . Weight: 18.5 lbs
- . Equipment not included



## PROTEK LP

### MAIN FEATURES

- . Durable roadcase for vinyl records
- . Approximate capacity: 70 records
- . Available colors: Black & Silver
- . Dimensions (LxWxH): 14.75" x 14.25" x 10.75"
- . Weight: 7 lbs.
- . Vinyl records sold separately



## PROTEK CD



### MAIN FEATURES

- . Durable roadcase for CDs and accessories
- . Aluminum CD case for 60 Jewel cases or 240 View Packs
- . Lock type latch with key
- . Available colors: Black, Silver, Blue & Red
- . Dimensions (LxWxH): 8.25" x 18.75" x 10.25"
- . Weight: 6 lbs.
- . CDs sold separately

## PROTEK CD300



### MAIN FEATURES

- . Durable roadcase for CDs and accessories
- . Aluminum CD case for 100 Jewel cases or 300 View Packs
- . Lock type latch with key
- . Available colors: Black & Silver
- . Dimensions (LxWxH): 12" x 24" x 6.75"
- . Weight: 5lbs
- . CDs sold separately

## PROTEK CD600

### MAIN FEATURES

- . Durable roadcase for CDs and accessories
- . Aluminum CD case for 200 Jewel cases or 600 View Packs
- . Heavy duty wheels and pull-up handle
- . Lock type latch with key
- . Available in Black only
- . Dimensions (LxWxH): 24.75" x 24" x 7.5"
- . Weight: 15 lbs.
- . CDs sold separately





# FEATHER FADERS

- . Feather Fader™ is a replaceable, universal crossfader designed for all PROformer Series, PROformer Plus and Q-Series mixers
- . Provides smooth and quick mixing transitions between channels
- . Our high quality crossfader is put into every mixer, unlike other companies, who sell it as an option! \
- . Fader plate not included.



**FF-1**  
XDM-221  
XDM-241  
XDM-343  
XDM-352  
XDM-3633




**FF-COMMANDER**  
COMMANDER PLUS  
DX5R



**FF-2**  
XDM-221  
XDM-241  
XDM-242  
XDM-343  
XDM-352  
XDM-3633  
XDM-250T

**FF-3**  
XDM-221

**FF-4**  
Q-2221



**FF-QFX**  
Q-FX19



**OF-1**  
Q-D5  
Q-D5/B  
Q-D5 MKII



**FF-4/S**  
Q-2422/S  
Q-3433/S

**FF-5/S**  
Q-2422/S  
Q-3433/S

**FF-DX**  
DX4



**FF-QSII**  
Q-SPAND MKII

**FF-7**  
Q-2411


**FF-DX**  
DX4

**OF-2**  
Q-D6



**FF-PLUS/S**  
Q-2422/S  
Q-3433/S  
Q-D1  
Q-MX1  
Q-MX2BPM  
Q-SPAND  
XDM-200  
XDM-250T


**FF-PLUS**  
Q-2221/SX  
Q-2422/SX  
Q-2422 MKII  
Q-2422 MKII LIMITED  
Q-3433/SX  
Q-3433 MKII  
Q-221  
Q-D3  
XDM-250

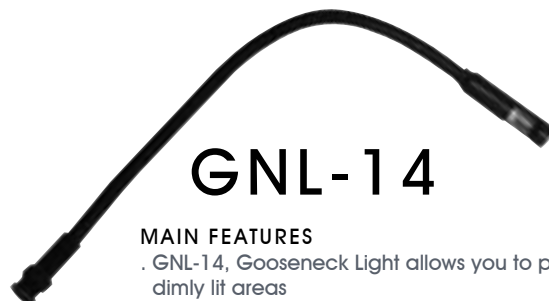

## GNL-14

### MAIN FEATURES

- . GNL-14, Gooseneck Light allows you to perform in dimly lit areas
- . 14-inch flexible gooseneck fits the American Audio® mixers with BNC connection
- . Comes with one lamp
- . Replacement lamp: Model: ZB-GNL
- . Connection: 12V DC BNC

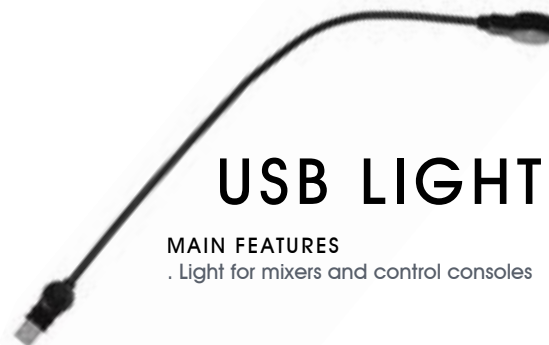

## USB LIGHT

### MAIN FEATURES

- . Light for mixers and control consoles

### SPEAKER CABLES

- S-725 - 1/4" to 1/4", 25 ft., 16 gauge cable
- S-725B - 1/4" to Banana, 25 ft., 16 gauge cable
- S-750 - 1/4" to 1/4", 50 ft., 16 gauge cable
- S-750B - 1/4" to Banana, 50 ft., 16 gauge cable
- S-146 - 1/4" to 1/4", 6 ft. speaker patch cable, 14 gauge
- S-1425 - 1/4" to 1/4", 25 ft., 14 gauge
- S-1425B - 1/4" to Banana, 25 ft., 14 gauge
- S-1450 - 1/4" to 1/4", 50 ft., 14 gauge
- S-1450B - 1/4" to Banana, 50 ft., 14 gauge
- S-126 - 1/4" to 1/4", 6 ft. speaker patch cable, 12 gauge
- S-1250 - 1/4" to 1/4", 50 ft., 12 gauge cable
- S-1250B - 1/4" to Banana, 50 ft., 12 gauge cable
- S-12100 - 1/4" to 1/4", 100 ft., 12 gauge cable
- S-12100B - 1/4" to Banana, 100 ft., 12 gauge cable

# AMERI-CABLES

### MIC CABLES

- MC-15 - Female XLR to Male XLR, 15 ft. MC-25 - Female XLR to Male XLR, 25 ft.
- MC-25P - Female XLR to 1/4", 25 ft.
- MC-50 - Female XLR to Male XLR, 50 ft.

### PATCH CORDS

- CB-403 - RCA to RCA Dual, 3 ft. cord
- CB-406 - RCA to RCA Dual, 6 ft. cord
- CB-412 - RCA to RCA Dual, 12 ft. cord
- CB-503 - CA to 1/4" Dual, 3 ft. cord
- CB-506 - RCA to 1/4" Dual, Molded heavy duty cable., 6 ft.
- CB-512 - RCA to 1/4" Dual, Molded heavy duty cable, gold tip, 12 ft. cord
- CB-603 - 1/4" to 1/4" dual, 3 ft. cord
- CB-606 - 1/4" to 1/4" dual, 6 ft. cord
- CB-612 - 1/4" to 1/4" dual, 12 ft. cord



# AMERICAN AUDIO



DISTRIBUTED BY:

**QUALITY, AFFORDABLE & RELIABLE**  
DJ GEAR FROM A COMPANY YOU CAN TRUST!

©2006 AMERICAN AUDIO® LOS ANGELES, CA 90058 USA

# 1996-2006