


ECS25 & 45 Series

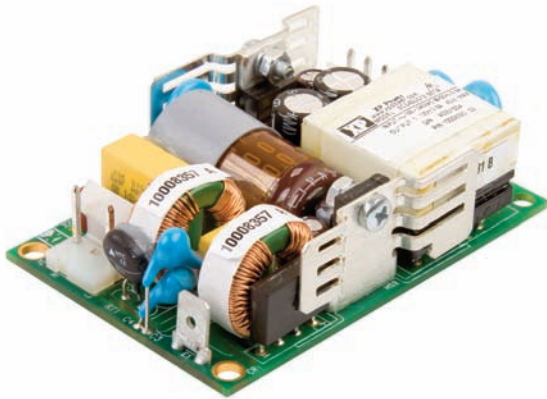

- IT & Medical Safety Approvals
- Very Small 2.0" x 3.0" x 0.95" Format
- <0.3 W Standby Power
- 25 & 45 W - Convection Cooled Ratings
- High Convection Cooled Power Density up to 7.9 W/in³
- Class I & Class II Installations
- -20 °C to +70 °C Operation
- Low Earth Leakage Current
- 3 Year Warranty

The ECS25 & 45 Series has been designed to minimise the no load power consumption (<0.3 W) and maximise efficiency in order to facilitate equipment design to the latest environmental legislation.

Approved for Class I and Class II applications, this range of single output AC-DC power supplies feature very high convection cooled power density in an industry leading 2 x 3" (51.0 mm x 76.2 mm) footprint. The 0.95" (24.1 mm) high, 1U compatible supplies meet EN55022 Level B conducted emissions with low earth leakage currents of 80 µA at 115 VAC or 160 µA at 230 VAC. Making these switchers ideal for industrial, IT and medical applications.

The series has single output versions from 5 V to 48 VDC, adjustable by $\pm 10\%$. They are dual-fused for compliance with IEC60601-1 and efficiency up to 89%, so minimal excess heat is generated. They require only convection cooling to deliver up to 45 W of power up to +50 °C and operates at up to +70 °C with derating.



T H E X P E R T S I N P O W E R

Models and Ratings - Convection-cooled

Output Power - Convection Cooled	Output Voltage V1	Max Output Current	Model Number ¹⁾
25 W	12.0 VDC	2.08 A	ECS25US12
25 W	15.0 VDC	1.67 A	ECS25US15
25 W	24.0 VDC	1.04 A	ECS25US24
25 W	48.0 VDC	0.52 A	ECS25US48
30 W	5.0 VDC	6.00 A	ECS45US05
45 W	12.0 VDC	3.75 A	ECS45US12
45 W	15.0 VDC	3.00 A	ECS45US15
45 W	24.0 VDC	1.90 A	ECS45US24
45 W	48.0 VDC	0.95 A	ECS45US48

Notes:

1. For covered versions, add suffix '-C' to model number. Not suitable for use in class II installations, derate output by 20% with cover.

Input Characteristics


Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage - Operating	80	115/230	264	VAC	Derate output power < 90 VAC. See fig. 1
Input Frequency	47	50/60	400	Hz	Agency approval 47-63 Hz
Power Factor		>0.5			230 VAC, 100% load EN61000-3-2 class A compliant
Input Current - No Load		0.01/0.02		A	115/230 VAC
Input Current - Full Load		0.75/0.45		A	115/230 VAC
Inrush Current			40	A	230 VAC cold start, 25 °C
No Load Input Power		0.15/0.22 0.3/0.4	0.3 0.5	W	115/230 VAC ECS45US05,12 & 24 Models 115/230 VAC ECS45US48 Models
Earth Leakage Current		80/160	260	µA	115/230 VAC/50 Hz (Typ.), 264 VAC/60 Hz (Max.)
		0.6/1.2		mA	115/230 VAC/400 Hz
Input Protection	T3.15A/250 V internal fuse in both line and neutral				

Output Characteristics

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage - V1	0.5		48	VDC	See Models and Ratings table
Initial Set Accuracy			±1	%	50% load, 115/230 VAC
Output Voltage Adjustment	±10			%	Via potentiometer. See mech. details (page 9)
Minimum Load	0			A	
Start Up Delay		1		s	230 VAC full load (see fig.2)
Hold Up Time	16			ms	115 VAC full load (see fig.3)
Drift			±0.2	%	After 20 min warm up
Line Regulation			±0.5	%	90-264 VAC
Load Regulation			±1	%	0-100% load.
Transient Response - V1			4	%	Recovery within 1% in less than 500 µs for a 50-75% and 75-50% load step
Over/Undershoot - V1		3		%	See fig.4
Ripple & Noise			1	% pk-pk	20 MHz bandwidth (see fig.5 & 6)
Overvoltage Protection	115		140	%	Vnom DC.
Overload Protection	110		200	% I nom	Auto reset (see fig.7)
Short Circuit Protection					Continuous, trip & restart (hiccup mode)
Temperature Coefficient			0.05	%/°C	
Overtemperature Protection				°C	Not fitted


Input Voltage Derating

Figure. 1

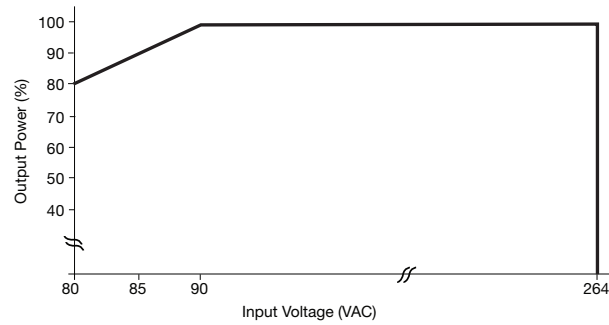


Start Up Delay From AC Turn On

Figure 2
Start up example from AC turn on
(230 VAC, 720 ms)

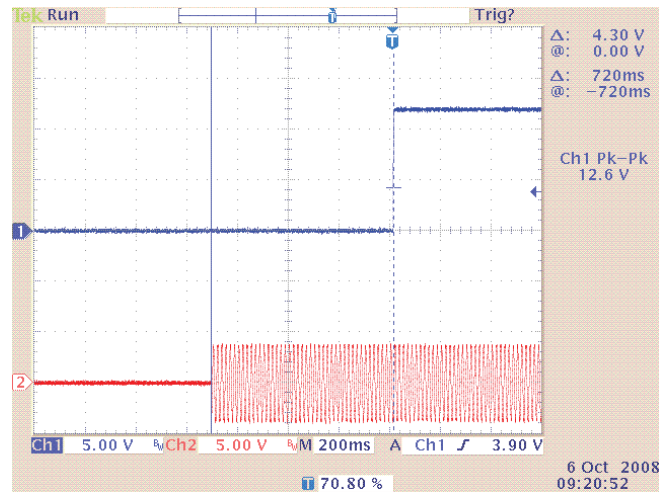


Hold Up Time From Loss of AC

Figure 3
Hold up example at 45 W load
with 115 VAC input (17.2ms)

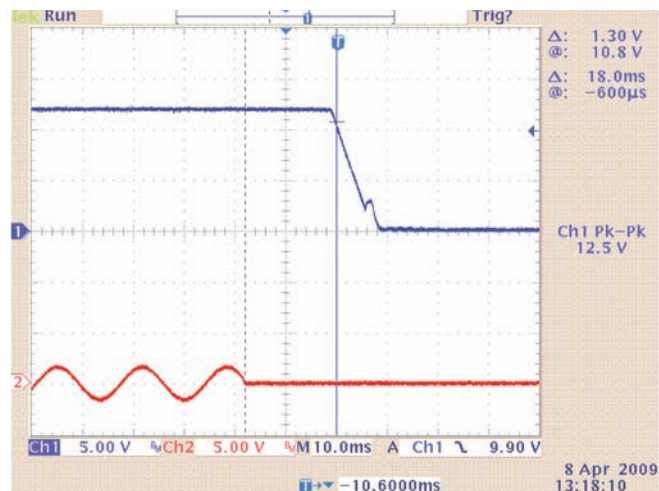


Typical Output Overshoot

Figure 4
Typical Output Overshoot
(ECS45US12, 230 VAC)

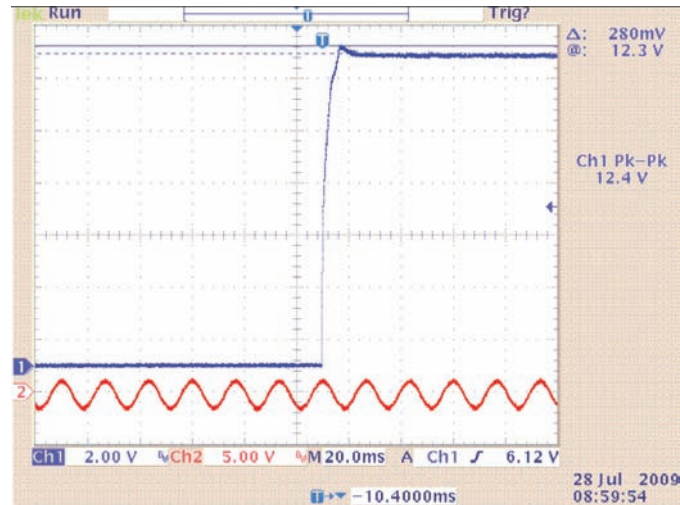


Output Ripple & Noise

Figure 5
ECS45US12 (45 W)
72 mV pk-pk ripple. 20 MHz BW

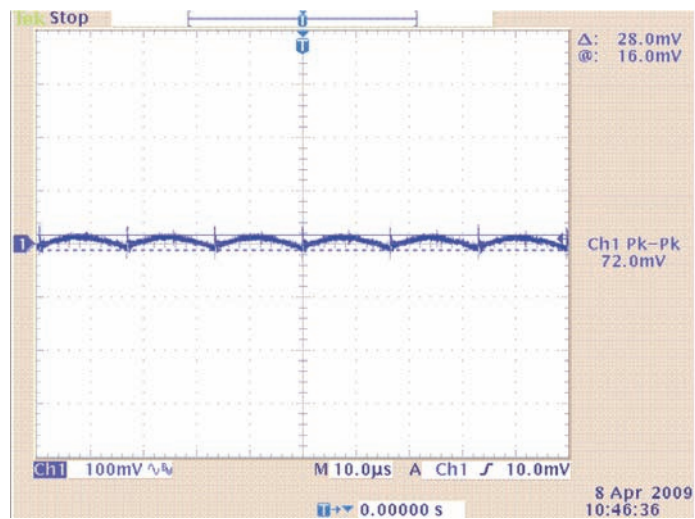


Output Ripple & Noise cont.

Figure 6
ECS45US48 (45 W)
188 mV pk-pk ripple. 20 MHz BW

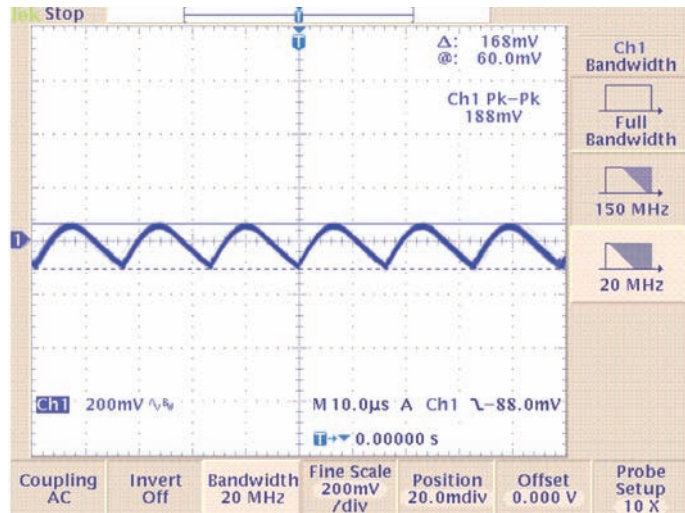

Output Overload Characteristic

Figure 7
Typical Overload
Characteristic
(ECS45US12 shown)

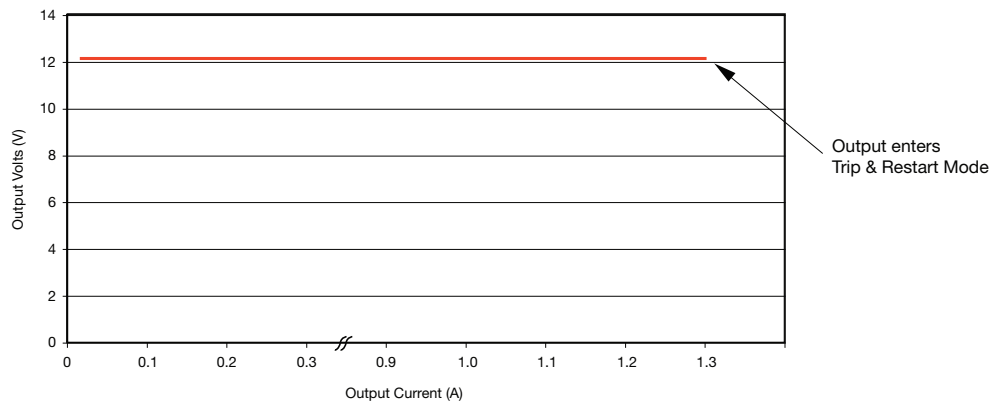

General Specifications

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency		87		%	Full load (see fig.8 & 9)
Isolation: Input to Output Input to Ground Output to Ground	4000			VAC	
	1500			VAC	
	500			VDC	
Switching Frequency		65		kHz	
Power Density			7.9	W/in ³	
Mean Time Between Failure		1072		kHrs	MIL-HDBK-217F, Notice 2 +25 °C GB
		660			MIL-HDBK-217F, Notice 2 +50 °C GB
Weight			0.22 (100)	lb (g)	

Efficiency Versus Load

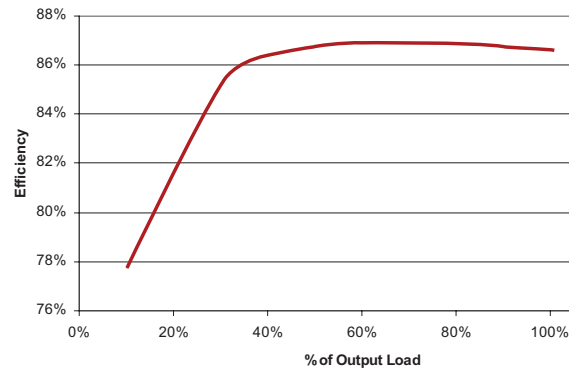


Figure 8
ECS45US12 at 230 VAC

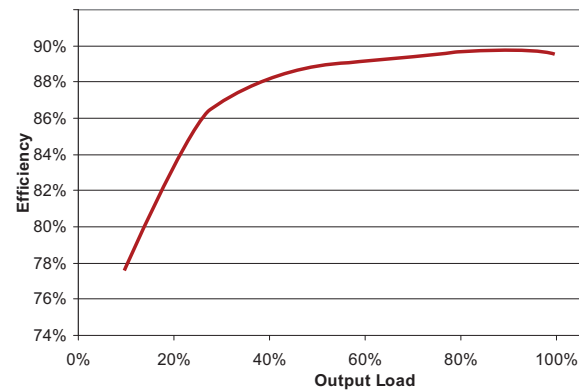



Figure 9
ECS45US48 at 230 VAC

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-20		+70	°C	Derate linearly from +50 °C at 2.5%/°C to 50% at 70 °C. (See fig.10 & Thermal Considerations)
Storage Temperature	-40		+85	°C	
Cooling					Convection cooled, see fig.10 & Thermal Considerations
Humidity	5		95	%RH	Non-condensing
Operating Altitude			3000	m	
Shock					3 x 30 g/11 ms shocks in both +ve & -ve directions along the 3 orthogonal axis, total 18 shocks.
Vibration					Three axis 5-500 Hz at 2 g x 10 sweeps

Derating Curve

Figure 10

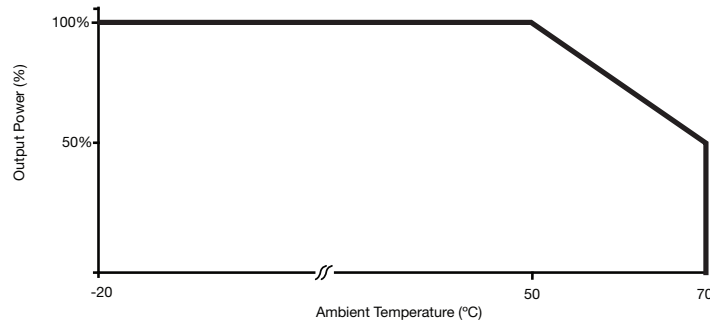

Electromagnetic Compatibility - Immunity

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Low Voltage PSU EMC	EN61204-3	High severity level	as below	
Harmonic Current	EN61000-3-2	Class A		
Radiated	EN61000-4-3	3	A	
EFT	EN61000-4-4	3	A	
Surges	EN61000-4-5	Installation class 3	A	
Conducted	EN61000-4-6	3	A	
Dips and Interruptions	EN61000-4-11	Dip: 30% 10 ms	A	
		Dip: 60% 100 ms	B	
		Dip: 100% 5000 ms	B	
	EN60601-1-2	Dip: 30% 500 ms	A	
		Dip: 60% 100 ms	A	Load derating with 115 VAC input (typically 45% derate dependant on model & load)
		Dip: 100% 10 ms	A	
		Int.: >95% 5000 ms	B	

Electromagnetic Compatibility - Emissions

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Conducted	EN55011/22	Class B		
Radiated	EN55011/22	Class B		ECS25
		Class A		ECS45
Voltage Fluctuations	EN61000-3-3			


Safety Agency Approvals

Safety Agency	Safety Standard	Category
CB Report	UL TBA IEC60950-1:2005 Ed 2	Information Technology - Pending
UL	UL File TBA UL60950-1 (2007), CSA 22.2 No.60950-1-07 Ed 2	Information Technology - Pending
TUV	TUV Certificate # TBA, EN60950-1:2006	Information Technology - Pending
CE	LVD	

Safety Agency	Safety Standard	Category
CB Report	UL TBA IEC60601-1 Ed 2	Medical - Pending
UL	UL File # TBA UL60601-1, CSA C22.2 No.601.1-M90:2005	Medical - Pending
TUV	TUV Certificate # TBA, EN60601-1/A12:1995	Medical - Pending

Equipment Protection Class	Safety Standard	Notes & Conditions
Class I & Class II	IEC60950-1:2005 Ed 2 & IEC60601-1 Ed 2	See safety agency conditions of acceptability for details

Mechanical Details - ECS25

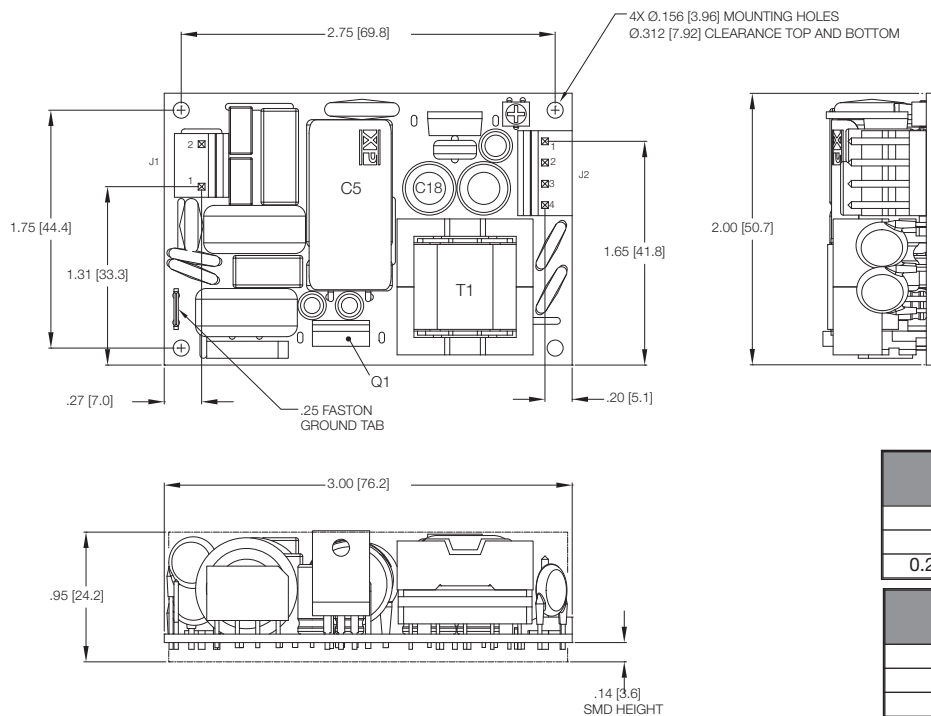

Input Connector J1 Molex PN 09-65-2038	
Pin 1	Line
Pin 2	Neutral
0.25" Faston	Earth

Input Connector J2 Molex PN 09-65-2048	
Pin 1	+V1
Pin 2	+V1
Pin 3	RTN
Pin 4	RTN

Notes

1. All dimensions in inches (mm).
Tolerance .xx = ± 0.02 (0.50); .xxx = ± 0.01 (0.25)

2. Weight 0.22 lbs (100 g)

J1 mates with Molex Housing PN 09-50-1031, J2 mates with Molex Housing PN 09-50-1041 and both with Molex Series 5194 Crimp Terminals


Mechanical Details - ECS45US05

Weight: 2.20 lbs (1000 g)
Dimensions shown in inches (mm).

Input Connector J1 Molex PN 09-65-2038	
Pin 1	Line
Pin 2	Neutral
0.25" Faston	Earth

Input Connector J2 Molex PN 09-65-2048	
Pin 1	+V1
Pin 2	+V1
Pin 3	RTN
Pin 4	RTN

J1 mates with Molex Housing PN 09-50-1031, J2 mates with Molex Housing PN 09-50-1041 and both with Molex Series 5194 Crimp Terminals

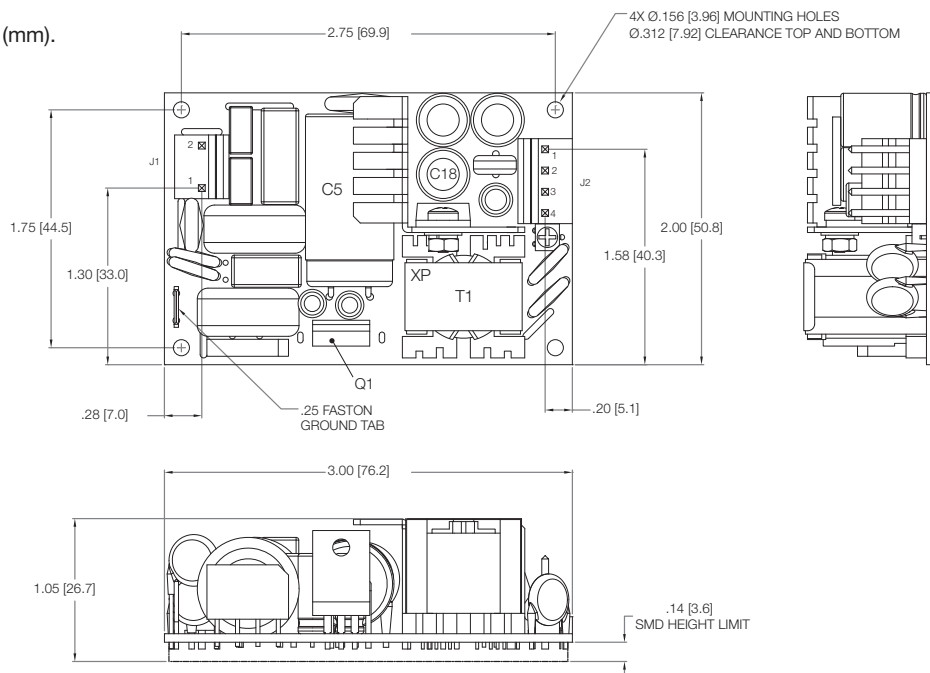


ECS45US other models

Input Connector J1 Molex PN 09-65-2038	
Pin 1	Line
Pin 2	Neutral
0.25" Faston	Earth

Input Connector J2 Molex PN 09-65-2048	
Pin 1	+V1
Pin 2	+V1
Pin 3	RTN
Pin 4	RTN

J1 mates with Molex Housing PN 09-50-1031, J2 mates with Molex Housing PN 09-50-1041 and both with Molex Series 5194 Crimp Terminals

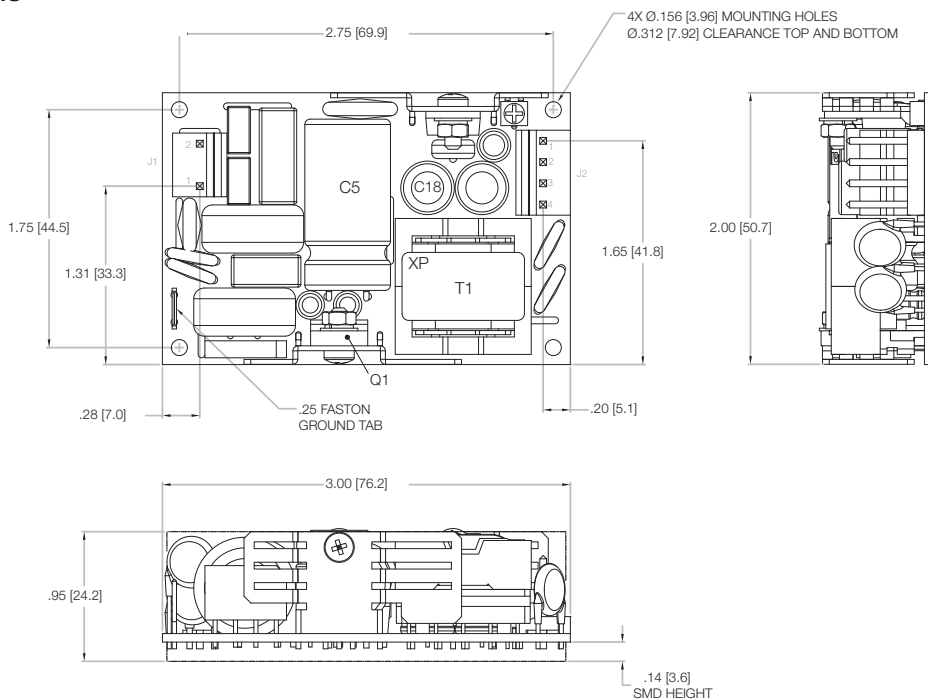


Notes

1. All dimensions in inches (mm).
Tolerance .xx = ±0.02 (0.50); .xxx = ±0.01 (0.25)

2. Weight: 0.22 lbs (100 g)

Covered Version - All models

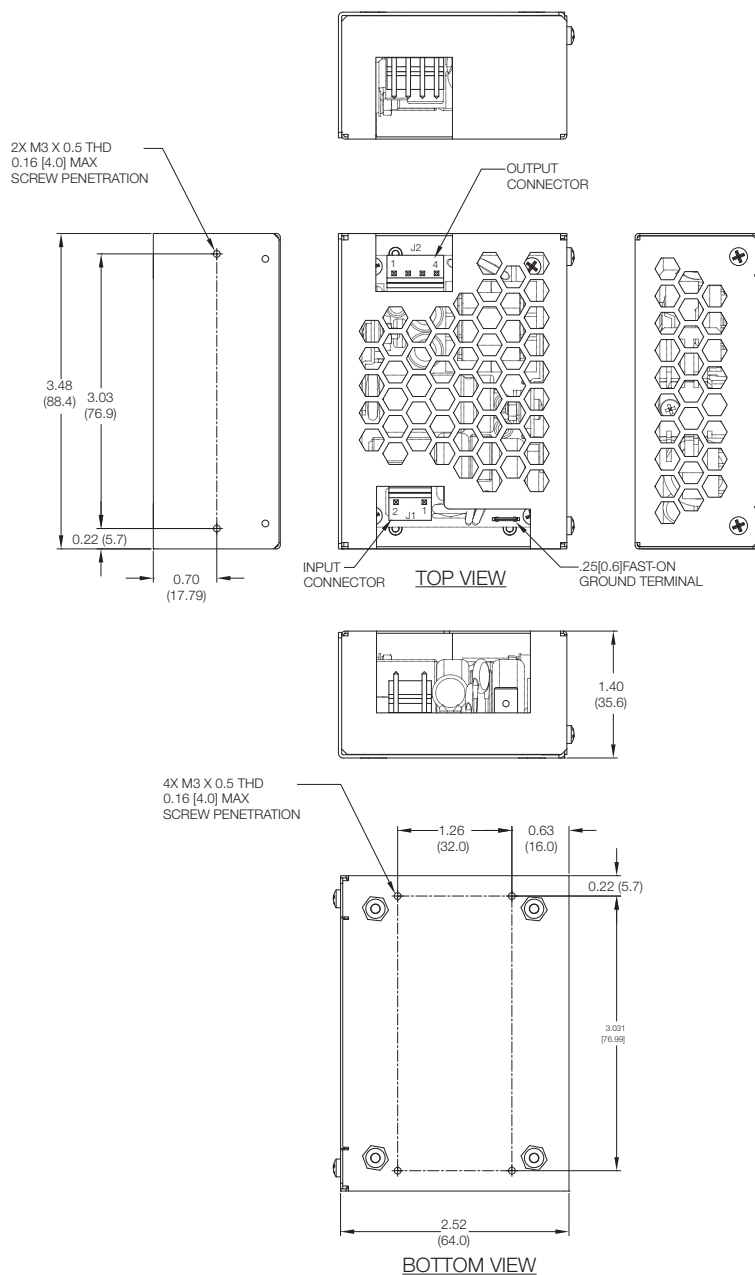

Thermal Considerations

In order to ensure correct and reliable operation of the PSU in the most adverse conditions permitted in the end-use equipment, the temperature of the components listed in the table below must not be exceeded. See drawing on page 8-9 for component locations. Temperature should be monitored using K type thermocouples placed on the hottest part of the component (out of any direct air flow).

Temperature Measurements (Ambient $\leq 50^{\circ}\text{C}$)	
Component	Max Temperature $^{\circ}\text{C}$
T1	110 $^{\circ}\text{C}$
Q1	110 $^{\circ}\text{C}$
C5	100 $^{\circ}\text{C}$
C18	100 $^{\circ}\text{C}$

www.xppower.com

North American HQ

XP Power
990 Benecia Avenue, Sunnyvale, CA 94085
Phone : +1 (408) 732-7777
Fax : +1 (408) 732-2002
Email : nasales@xppower.com

North American Sales Offices

Toll Free.....+1 (800) 253-0490
Central Region.....+1 (972) 578-1530
Eastern Region+1 (973) 658-8001
Western Region.....+1 (408) 732-7777

European HQ

XP Power
Horseshoe Park, Pangbourne,
Berkshire, RG8 7JW, UK
Phone : +44 (0)118 984 5515
Fax : +44 (0)118 984 3423
Email : eusales@xppower.com

European Sales Offices

Austria+41 (0)56 448 90 80
Belgium+33 (0)1 45 12 31 15
Denmark+45 43 42 38 33
Finland.....+46 (0)8 555 367 01
France+33 (0)1 45 12 31 15
Germany.....+49 (0)421 63 93 3 0
Italy+39 039 2876027
Netherlands+49 (0)421 63 93 3 0
Norway.....+47 63 94 60 18
Sweden +46 (0)8 555 367 00
Switzerland..... +41 (0)56 448 90 80
United Kingdom.....+44 (0)118 984 5515

Global Catalog Distributors

AmericasNewark newark.com
Europe & Asia.....Farnell farnell.com
ChinaPremier Electronics premierelectronics.com.cn

Asian HQ

XP Power
401 Commonwealth Drive, Haw Par Technocentre, Lobby B,
#02-02, Singapore 149598
Phone : +65 6411 6900
Fax : +65 6741 8730
Email : apsales@xppower.com
Web : www.xppowerchina.com / www.xppower.com

Asian Sales Offices

Shanghai +86 21 51388389
Singapore..... +65 6411 6902

Distributors

Australia+61 2 9809 5022 Amtex
Balkans+386 1 583 7930 Elbacomp
Czech Rep.+420 235 366 129 Vums Powerprag
Czech Rep.+420 539 050 630 Koala Elektronik
Estonia+372 6228866 Elgerta
Greece+30 210 240 1961 ADEM Electronics
Israel+972 9 7498777 Appletec
Japan+81 48 864 7733 Belnix
Korea+82 31 422 8882 Hanpower
Latvia+371 67501005 Caro
Lithuania.....+370 5 2652683 Elgerta
Poland+48 22 8627500 Gamma
Portugal.....+34 93 263 33 54 Venco
Russia+7 (495)234 0636 Prosoft
Russia+7 (812)325 5115 Gamma
South Africa.....+27 11 453 1910 Vepac
Spain.....+34 93 263 33 54 Venco
Taiwan+886 3 3559642 Fullerton Power
Turkey+90 212 465 7199 EMPA



T H E X P E R T S I N P O W E R