


互换-反向-内螺丝-
阀门
BDSV-10.-3-0







IMAV-Hydraulik GmbH
Breite Strasse 10
40670 Meerbusch - Germany
fon +49 (0)2159 - 9188.0
fax +49 (0)2159 - 4242
e-mail: info@imav.com
internet: <http://www.imav.com>

CC-320-101-00

(若有变更, 恕不另行通知)

HEX 27 mm
(启动-
扭矩:
48 - 54 Nm)

开始-
钻孔
C-10-3
参见
尺寸说明书:
[IK-300-109-00](#)

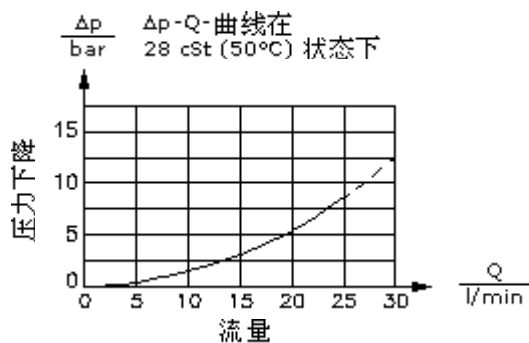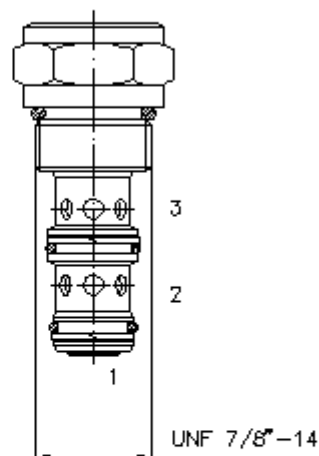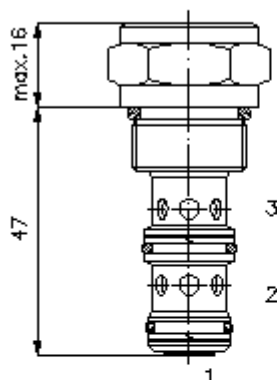

互换-反向-内螺丝-
阀门

BDSV-10.-3-0

订货样例:

BDSV - 10N - 3 - 0
| | | |
A **B** **C** **D**



IMAV-Hydraulik GmbH
Breite Strasse 10
40670 Meerbusch - Germany
fon +49 (0)2159 - 9188.0
fax +49 (0)2159 - 4242
e-mail: info@imav.com
internet: <http://www.imav.com>

CC-320-101-00

(若有变更, 恕不另行通知)

货号:



产品设计
互换单项阀门
球型



尺寸和密封
10N = Buna (NBR)
10V = Viton (FPM)



产品类型
3路钻孔



设计外形
0 = 内螺丝阀门

技术参数:

额定压力: 350 bar

额定流量: 23 l/min

重量: 0,11 kg

温度范围: -40°C 至 120°C

压力剂: HL液压油根据DIN 51524 T1 (ISO TC 131)

最大漏油量: 5 滴/分钟在 22 cSt (50°C) 和350bar的状态下

密封: 可选择Buna (NBR) 或 Viton (FPM), 或者Teflon支环

钻孔: C-10-3参见尺寸说明书: IK-300-109-00

外壳: 3LH-10.-B.. 参见尺寸说明书第: IH-300-000-00号

密封圈: SP-CDS-10N-32 (NBR), SP-CDS-10V-32 (FPM)