


压力上限-内螺丝阀门
(预先设置, 可调节)
RV5-16.-.-0-..

EAT-N
Hydraulics



IMAV-Hydraulik GmbH
Breite Strasse 10
40670 Meerbusch - Germany
fon +49 (0)2159 - 9188.0
fax +49 (0)2159 - 4242
e-mail: info@imav.com
internet: <http://www.imav.com>

MP-170-161-00





(若有变更, 恕不另行通知)

HEX 3/4"

HEX 1 1/2"
(启动-
扭矩:
109 - 122 Nm)

开始-
钻孔
C-16-2
参见
尺寸说明书:
IK-100-169-00

HEX 3/16"

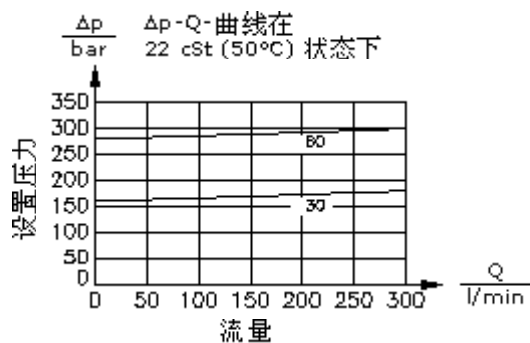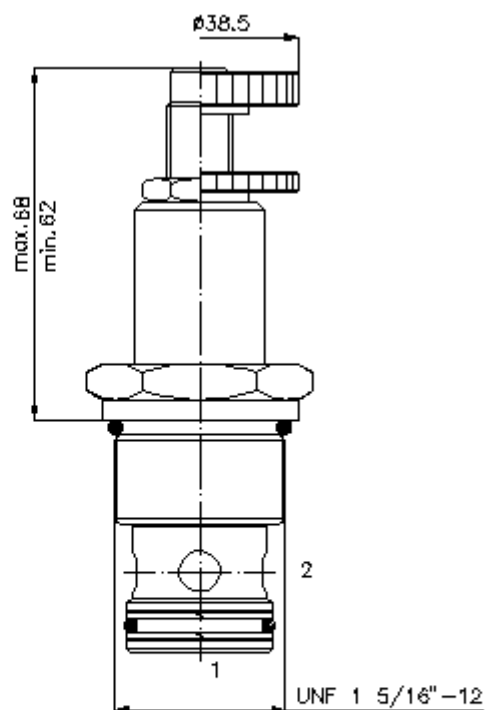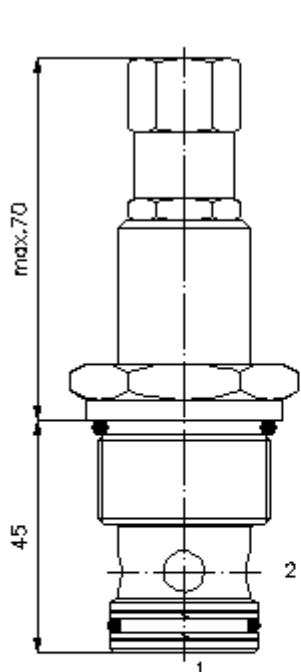

压力上限-内螺丝阀门
(预先设置, 可调节)
RV5-16.-.-0-..



IMAV-Hydraulik GmbH
Breite Strasse 10
40670 Meerbusch - Germany
fon +49 (0)2159 - 9188.0
fax +49 (0)2159 - 4242
e-mail: info@imav.com
internet: <http://www.imav.com>

MP-170-161-00

(若有变更, 恕不另行通知)

订货样例:

RV5 - 16N - C - 0 - 30
| | | | |
A **B** **C** **D** **E**

货号:

A

产品设计

减压阀

轴型阀

预先控制

B

尺寸和密封

16N = Buna (NBR)

16V = Viton (FPM)

C

设置

S = 螺丝中心柱

C = 关盖

K = 手动轮

D

设计外形

0 = 内螺丝阀门

E

压力等级

30 = 34,0 - 210 bar

60 = 70,0 - 415 bar

技术参数:

额定压力: 350 bar

额定流量: 303 l/min

重量: 0,71 kg

温度范围: -40°C 至 120°C

压力剂: HL液压油根据DIN 51524 T1 (ISO TC 131)

最大漏油量: 164 ccm/分钟在22 cSt (50°C) 和 350巴的状态下

密封: 可选择Buna (NBR) 或 Viton (FPM), 或者Teflon支环

钻孔: C-16-2 参见尺寸说明书: IK-100-169-00

外壳: 2LH-16.-B. 参见尺寸说明书第.: IH-100-000-00号

密封圈: SP-MDS-16N-22 (NBR), SP-MDS-16V-22 (FPM)