


压力上限-内螺丝阀门
配有 外接控制接口
VRV11-12.-0-0-..



IMAV-Hydraulik GmbH
Breite Strasse 10
40670 Meerbusch - Germany
fon +49 (0)2159 - 9188.0
fax +49 (0)2159 - 4242
e-mail: info@imav.com
internet: <http://www.imav.com>

MP-190-120-00

(若有变更, 恕不另行通知)


HEX 3/4"

HEX 1 1/4"


(启动-
扭矩:
85 - 94 Nm)

开始-
钻孔
C-12-2
参见
尺寸说明书:
IK-100-129-00

HEX 3/16"

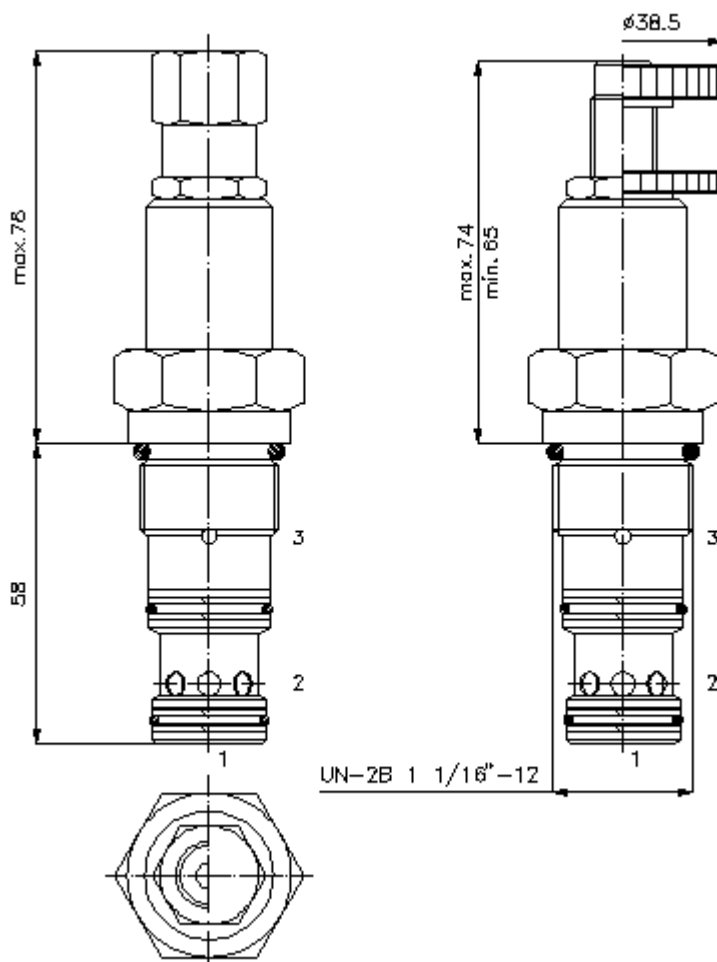

UN-2B 1 1/16"-12

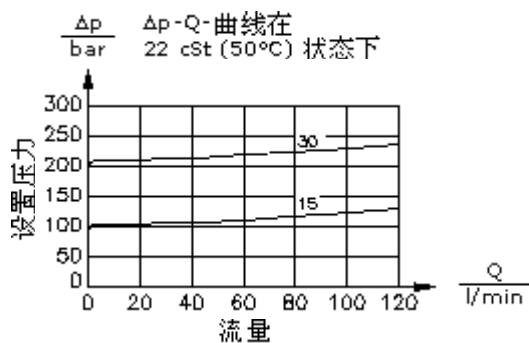

压力上限-内螺丝阀门
配有 外接控制接口
VRV11-12.-0-..



IMAV-Hydraulik GmbH
Breite Strasse 10
40670 Meerbusch - Germany
fon +49 (0)2159 - 9188.0
fax +49 (0)2159 - 4242
e-mail: info@imav.com
internet: <http://www.imav.com>

MP-190-120-00

(若有变更, 恕不另行通知)

订货样例:

VRV11 - 12N - C - 0 - 30
| | | | |
A **B** **C** **D** **E**

货号:



产品设计

减压阀

轴型阀

预先控制



尺寸和密封

12N = Buna (NBR)

12V = Viton (FPM)



设置

S = 螺丝中心柱

C = 关盖

K = 手动轮



设计外形

0 = 内螺丝阀门



压力等级

15 = 5,0 - 100 bar

30 = 10,0 - 210 bar

技术参数:

额定压力: 210 bar

额定流量: 114 l/min

重量: 0,4 kg

温度范围: -40°C 至 120°C

压力剂: HL液压油根据DIN 51524 T1 (ISO TC 131)

最大漏油量: 82 ccm/min 在 22 cSt (50°C)和 80%开口压力的状态下

密封: 可选择Buna (NBR) 或 Viton (FPM), 或者Teflon支环

钻孔: C-12-3S 参见尺寸说明书: [IK-200-129-00](#)

外壳: 3SLH-12.-B.. 参见尺寸说明书第: [IH-200-000-00](#)号

密封圈: SP-MDS-12N-34S (NBR), SP-MDS-12V-34S (FPM)